MAD-1616

Audio Distributor Amp

장비개요 및 성능

Description

○ 본 장비는 1개의 Analog Audio 신호를 입력 받아 신호의 저하 없이 6개의 Analog Audio 출력으로 증폭 분배 시켜주는 Card Type의 Audio 분배 장치이다. [1 In 6 Out 16 Ch]

○ 또한 본 장비는 1개의 Card당 서로 다른 2개의 Analog Audio 신호를 입력 받아 신호의 저하 없이 각각 3개의 Analog Audio 출력으로 증폭 분배 시켜주는 Card Type의 Audio 분배 장치이다. [1 In 3 Out 32 Ch]

Features

○ 본 장비는 Card Type 방송용 Audio 전용 분배 증폭기로서 전면에서 장비의 전원 공급상태를 확인 가능하도록 설계되었다.

○ Main Shelf에 16 Card를 실장할 수 있으며, 1Card당 1입력에 6분배 출력 또는 1Card당 1신호 입력에 3분배 출력을 2Channel 사용할 수 있다.

○ Card별로 Audio Gain 조절 단자 부착으로 Audio Level 신호 조정이 가능하다.

○ 특성은 Low Loss 및 왜율이 없는 깨끗한 특성의 신호분배 기능을 가지고 있다.

Panel Drawing



Specifications

○ Audio Part

- Input/Output number : 1 x 6 x 16ch or 1 x 3out x 32ch
- Input/Output type : balanced stereo, 600ohm
- Input/Output connector : WAGO
- Max Level : 21dBm
- Frequency response : ±0.1dB(20Hz ~ 20kHz)
- Crosstalk : below 80dB
- S/N : below 83dB (20Hz-20kHz)

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MAD-1616


Audio Distributor Amp

장비개요 및 성능

Specifications

○ Case & Power Part

- Power source : AC 85 ~ 240V, 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 40Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 267(H) * 300(D) mm

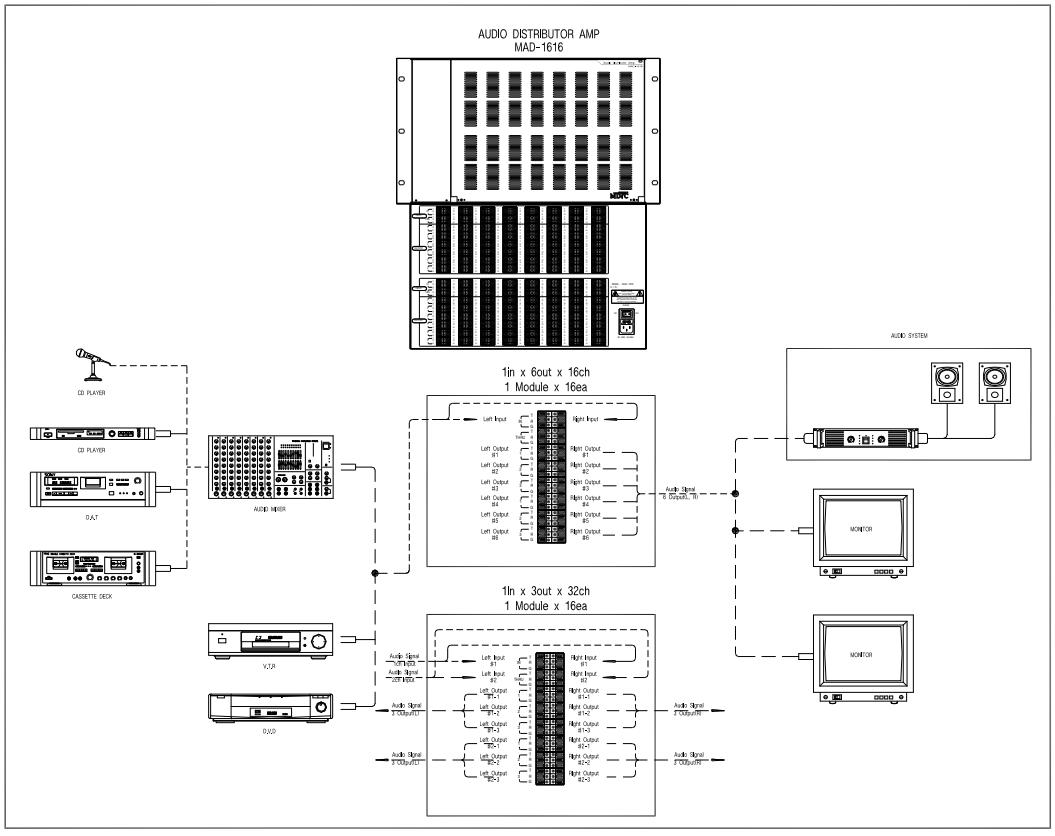

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217