# MRMS-401

# RGB Selector Switcher

MDTC

**Equipment Overview & Function**

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

## Description


○ It allows 4 RGB input signals with R.G.B.HD.VD. to be switched to one compatible display device.

## Features

○ Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear bnc connector makes operation easy.

○ LED helps to view and confirm status of the selected switch and the communicated remote control.

## Panel Drawing

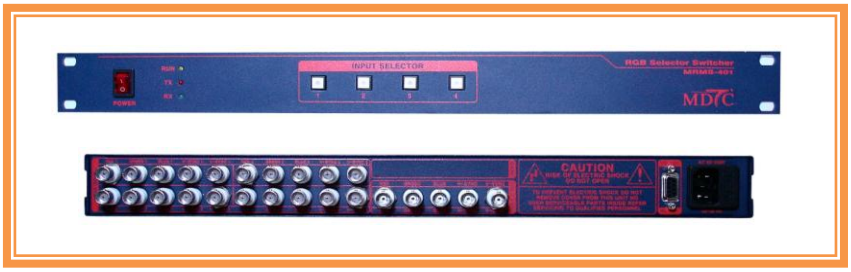


## Specifications

○ Video Part

- Input/Output number : 4 x 1
- Input/Output type : RGBHV
- Input/Output connector : 5 BNC
- Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
- Input/Output impedance : 75Ohm ± 1%
- Bandwidth : 600 MHz (-3 dB), fully loaded



MAX **Max Digital Tech Co.,Ltd**
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..


| | | |
|---|---|---|
| **Asia** | +65 81335582 | Fax. +65 67828910 |
| **China** | +86 021 54249750 | Fax. +86 021 54240199 |
| **Singapore** | +65 81335582 | Fax. +65 67828910 |
| **Korea** | +82 2 2026 1200 | Fax. +82 2 2026 1217 |

# MRMS-401

# RGB Selector Switcher

Equipment Overview & Function




## Specifications

○ Remote Control Part

- Serial control : 1 RS-232, D-sub 9pin connector

○ Case & Power Part

- Power source : AC 85 ~ 240V, 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 20Watt
- Type : 19" rack type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

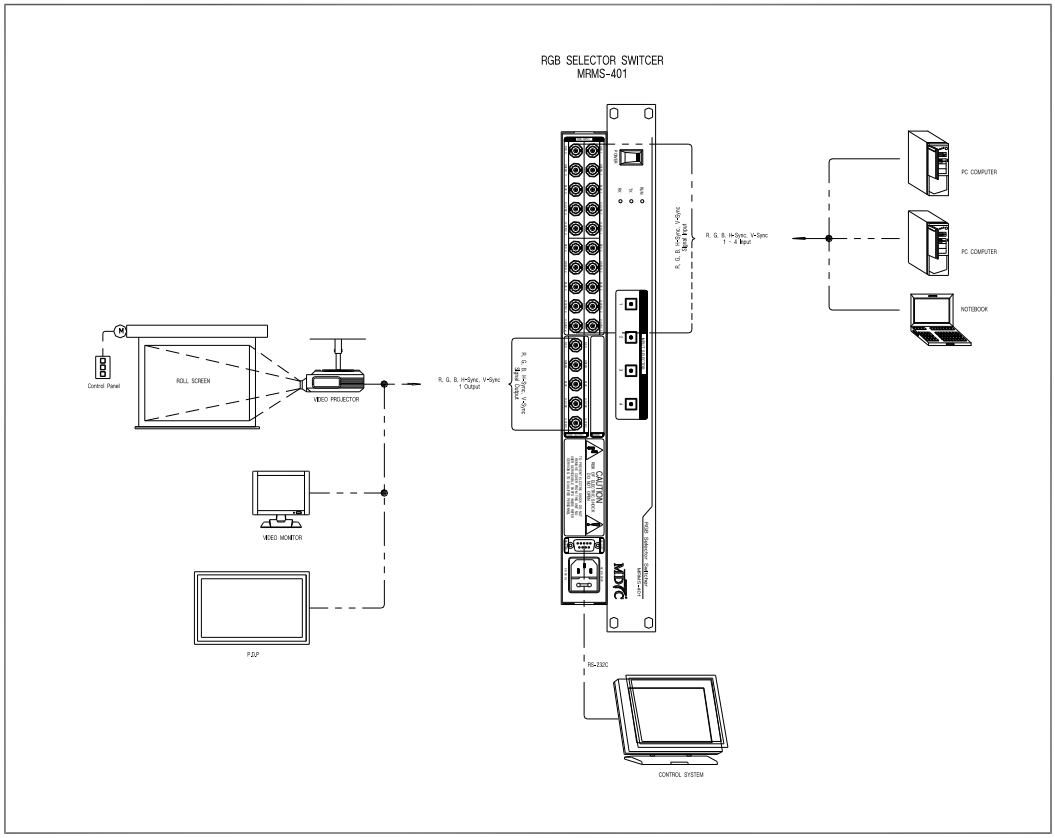




Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..


| | | |
|---|---|---|
| Asia | +65 81335582 | Fax. +65 67828910 |
| China | +86 021 54249750 | Fax. +86 021 54240199 |
| Singapore | +65 81335582 | Fax. +65 67828910 |
| Korea | +82 2 2026 1200 | Fax. +82 2 2026 1217 |