PRODUCT REVIEW SHEET

IP Auto Focus IR Bullet Camera

Design



SJ MICROTECH Co., Ltd.

Key Features

1/3" 2.43M Panasonic CMOS image sensor
H.264/MJPEG, Dual Stream IP Camera
Max. 30fps/Full HD (1920x1080)
Remote access for Web Browser
Network Bandwidth Control
Event Alarm, e-mail, ftp Function
RTP/RTSP(Multicast)
Upgrade for Remote Access
Support ONVIF & PSIA Standards
42 pcs of IR LEDs covering 40 meters
2.8~11mm Motorized TDN DC auto iris MP lens
Self focusing with one step
True Day & Night function with ICR mechanism
3-axis concealed bracket
Weatherproof / IP-66 compliant
PoE (IEEE802.3af)

Specifications

Model	SJC42B92PIMT
Image Sensor	1/3" 2.43M Panasonic CMOS image sensor
Lens	2.8~11mm motorized TDN DC auto iris MP lens
Minimum Illumination	0.000 Lux (IR on)
Compression	H.264/MJPEG
Max Streaming Speed	Max 30fps @ 1920X1080
Scanning System	Progressive
Bit Rate Control	VBR/CBR (H.264, 32k~12Mbps)
Standard	ONVIF(Profile S) / PSIA(v1.0)
LAN Interface	10/100-base-T
Protocol	HTTP, RTP/RTSP, TCP/IP, FTP, Telnet, RARP, PPPoE, SNMP, PAP, CHAP, DHCP, NTP, SMTP client and etc
Viewer	IE6, Firefox, Safari, etc CMS, QuickTime
Remote Admin	Web based administration, setup, control, and upgrade
Advanced Service	E-mail / FTP / Alarm buffering Event notification
Dynamic IP	DDNS / uPnP support
Security	Multilevel password channel-wise privilege
Operating Temperature	-10℃ to 50℃
Operating Humidity	10% to 90% RH
Power Supply	PoE (IEEE802.3af)
Dimension/mm	Φ76 X 210(W) X 109(H)
Weight/g	920

Specification & Design are subject to change without prior notice

Dimensions

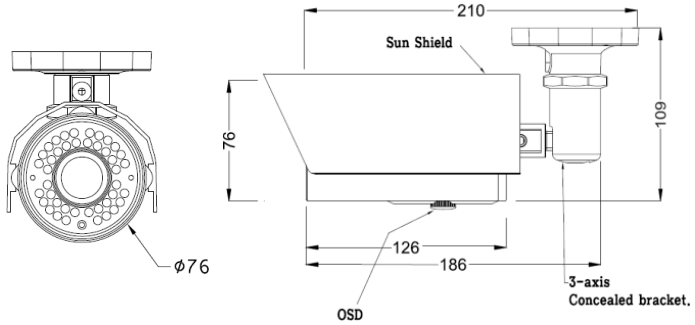

SJ MICROTECH Co., Ltd.

Copyrights© SJ Microtech Co.,Ltd. All rights reserved