

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

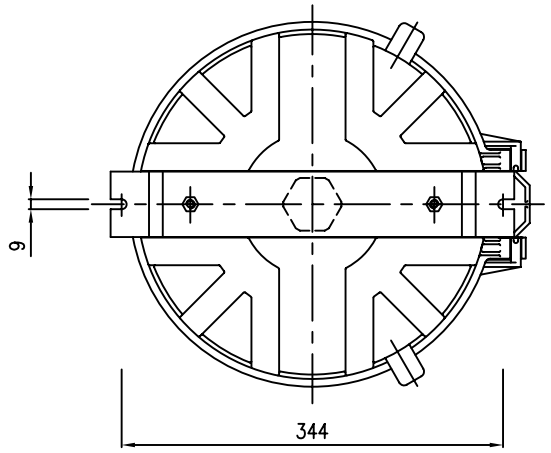


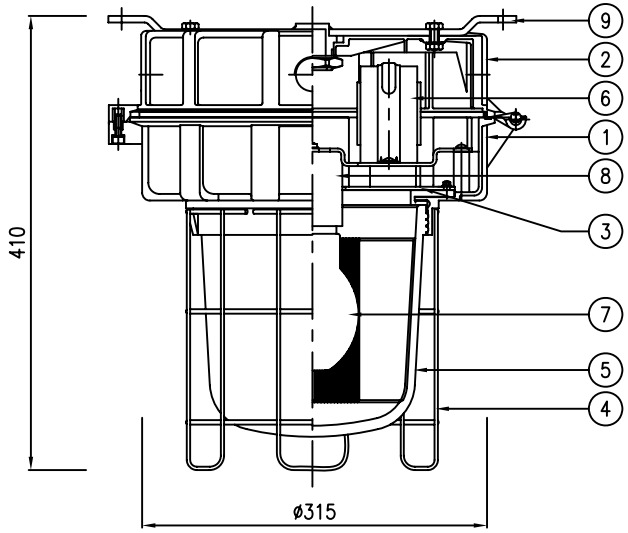


TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 100W	– SET
		☐	
	☐ H. P. SODIUM		
	☐ METAL HALIDE		

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION	EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED
			
		☐ DOME TYPE	☐ 30° ANGLE
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	 ☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
		☐ W/2–BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
9	MOUNTING BRACKET	STEEL SHEET	
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	


SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (CEILING MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN–L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B – V L H – D 1 – A 0 1	

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

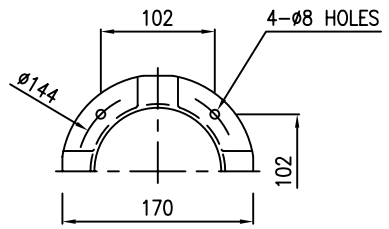

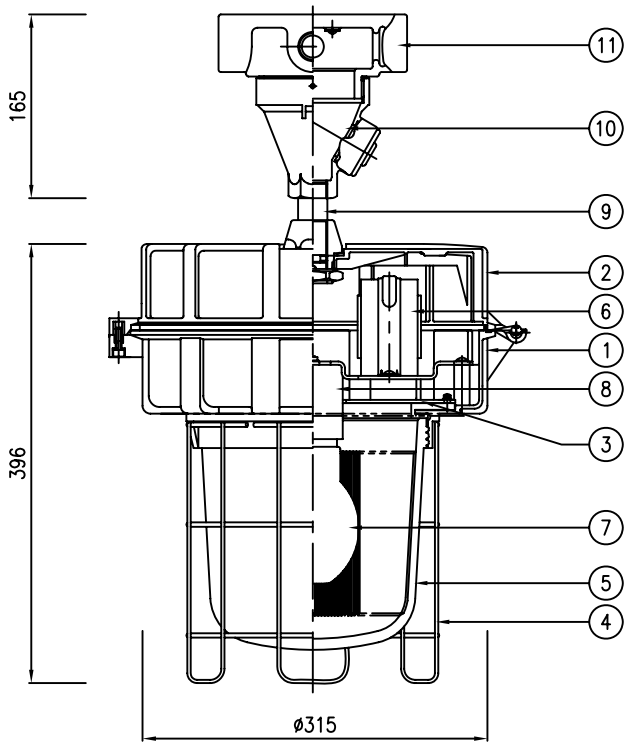

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 100W	– SET
		☐	

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
THREAD	☐ NPT ☐ PF ☐ MM ☐	
SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐	
LOCATION	1 / 2 / 3 / 4	☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
	☐ W/2–BLIND PLUGS ☐ NONE	

NOTE

1.


NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	FLANGE	DIE CASTING ALUMINIUM	
9	NIPPLE	STEEL	
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (CEILING MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN–L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B – V L H – D 1 – A 0 1	

* LENGTH(L) ORDER MADE.

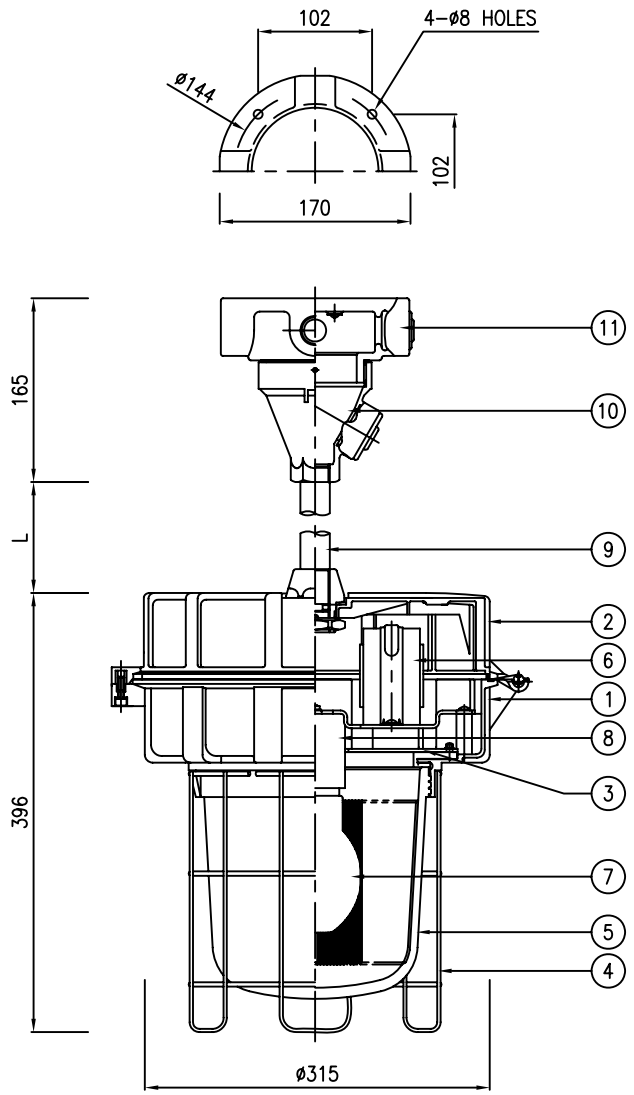

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 100W	– SET
		☐	

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE


1.

NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	FLANGE	DIE CASTING ALUMINIUM	
9	SUSPENSION STEM	HEAVY GAUGE STEEL PIPE	
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (PENDANT MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B - V L H - D 1 - A 0 1	

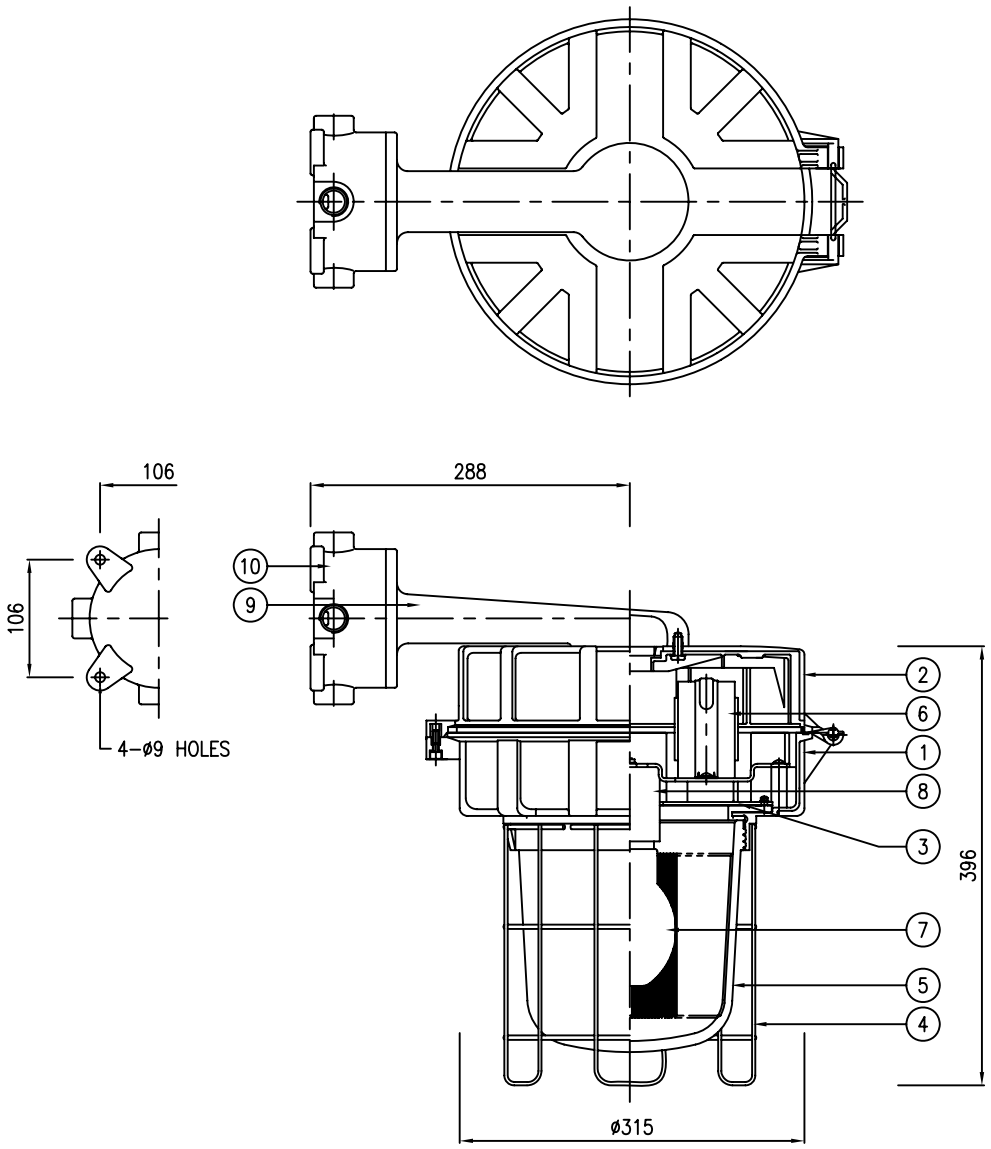

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 100W	– SET
		☐	

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
		☐ W/2–BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
10	MOUNTING BOX	CAST ALUMINIUM ALLOY	
9	BRACKET	CAST ALUMINIUM ALLOY	
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (90° BRACKET MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN–L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B – V L H – D 1 – A 0 1	

* LENGTH(L) ORDER MADE.

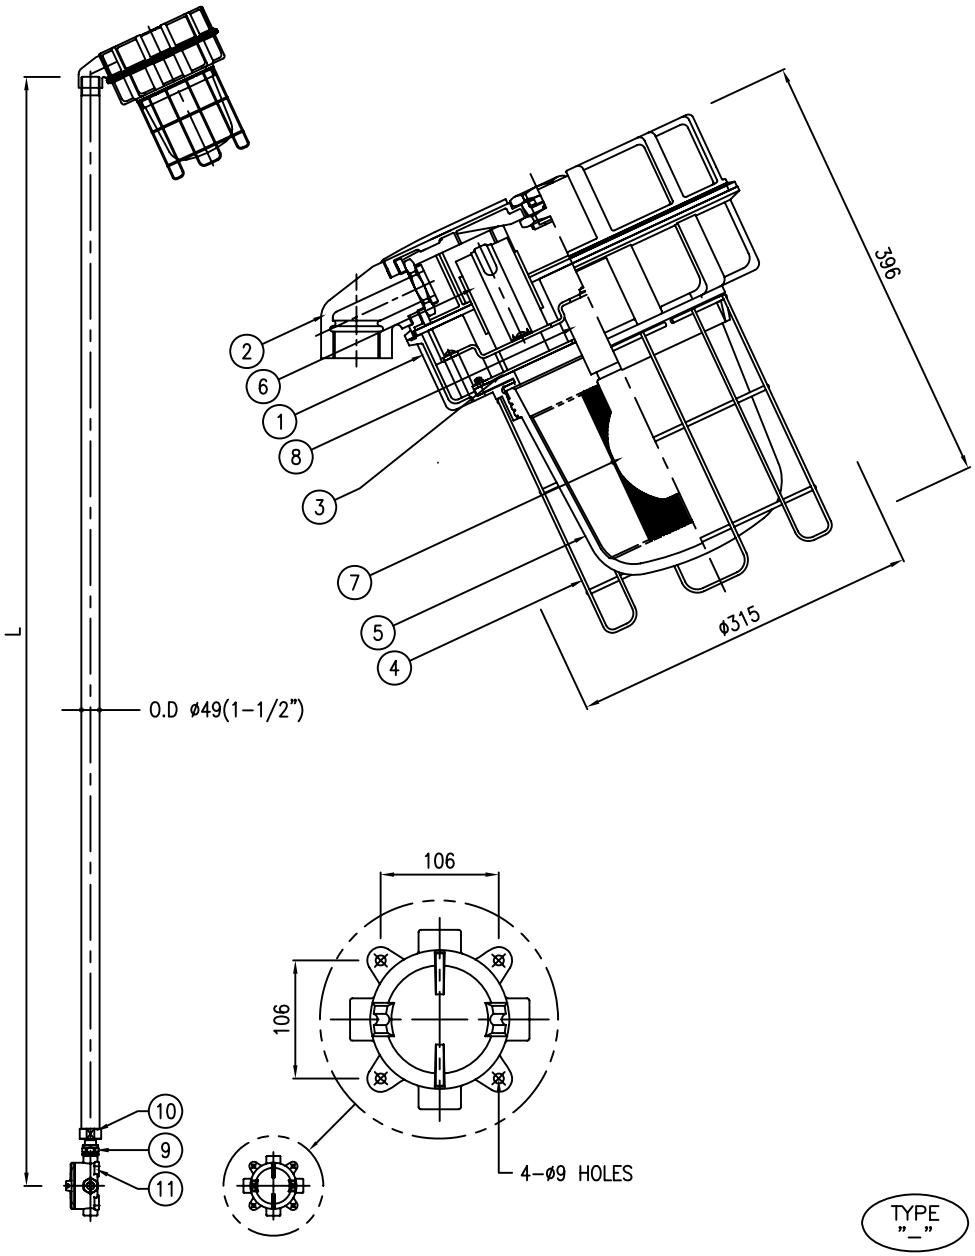

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 100W	– SET
		☐	

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE			
	THREAD	☐ NPT ☐ PF ☐ MM ☐	
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐	
	LOCATION	P / 1 / 3 / 2	☐ P-1 ☐ P-2 ☐ P-1-2 ■ P-1-2-3
		☐ W/2-BLIND PLUGS	☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	SOCKET	CARBON STEEL	
9	UNION COUPLING	CARBON STEEL	
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	STANCHION HOOD	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (STANCHION MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	LTG. FIXTURE : DARK GRAY POLE : HOT DIP GALVANIZED	DRAWING NO.	N B - V L H - D 1 - A 0 1	

* LENGTH(L) ORDER MADE.

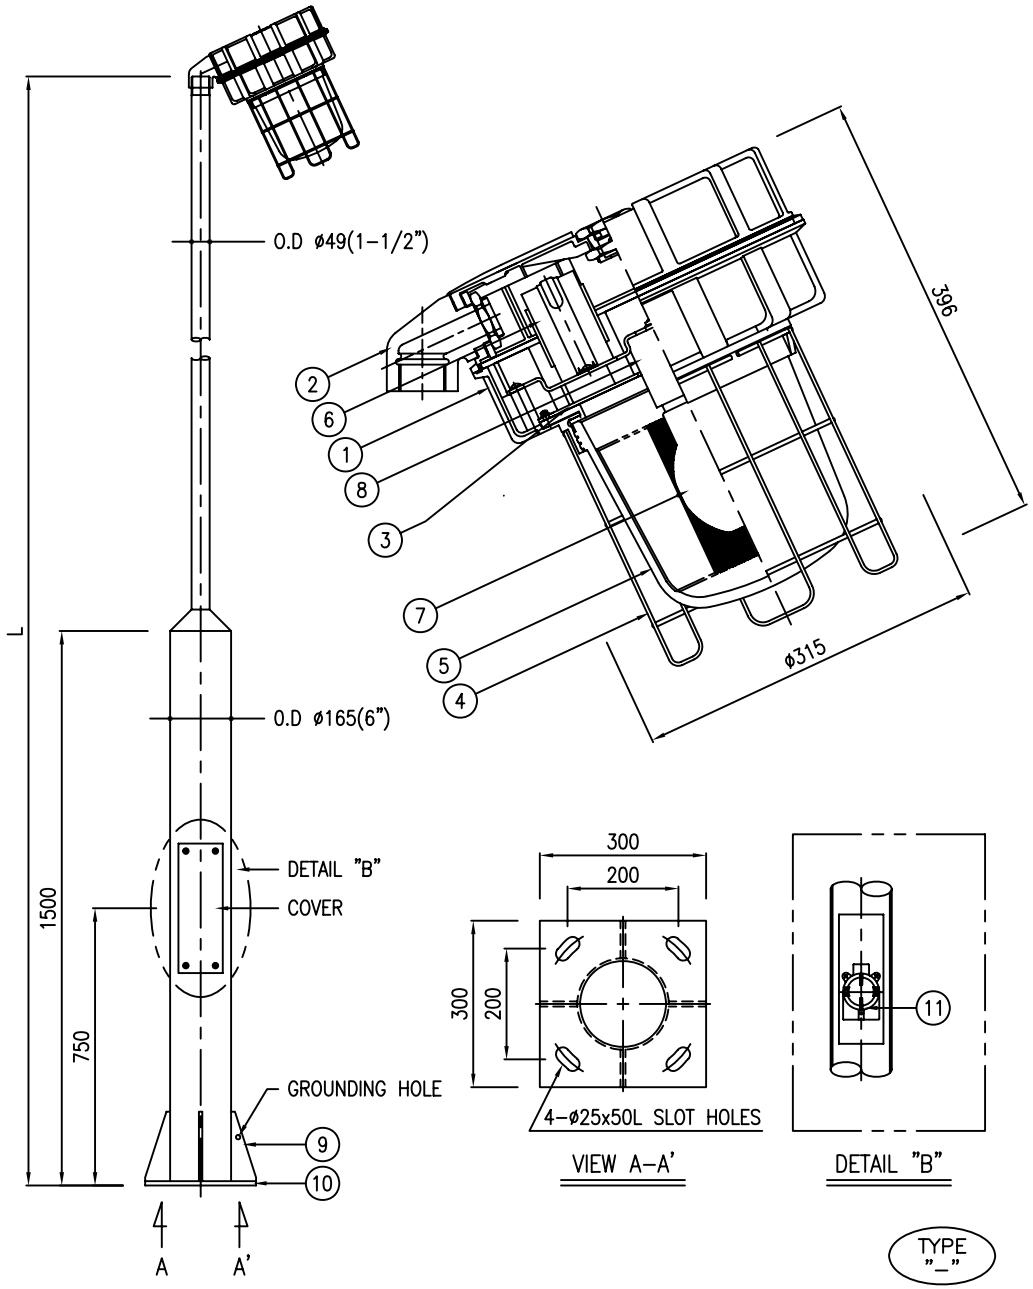

VIEW A-A'

DETAIL "B"

TYPE "-"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 100W	- SET
		☐	
	☐ H. P. SODIUM		
	☐ METAL HALIDE		

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	LIGHTING ☐ L-1 ☐ L-2 ☐ L-1-2 (1 2)
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
11	JUNCTION BOX	CAST ALUMINIUM ALLOY	
10	BASE PLATE	STEEL PLATE	12.0t
9	SUPPORT	STEEL PLATE	9.0t
8	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	STANCHION HOOD	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	


SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (PEDESTAL TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES		CLASS OF PROTECTION	Ex nR II T*
COLOR FINISHING	LTG. FIXTURE : DARK GRAY POLE : HOT DIP GALVANIZED		DRAWING NO.	N B - V L H - D 1 - A 0 1

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

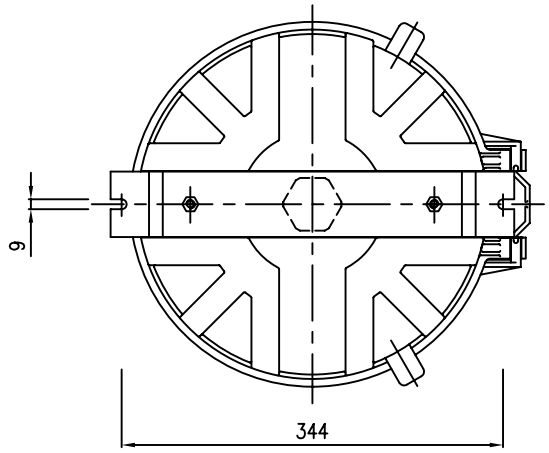

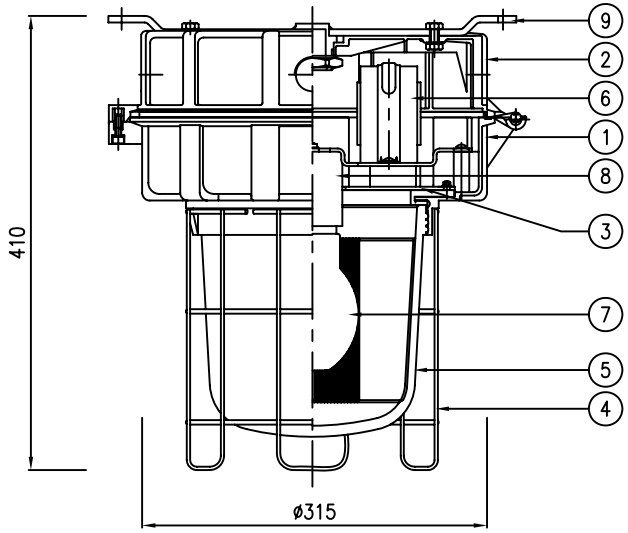

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 150W	– SET
		☐ 175W	– SET
	☐ H. P. SODIUM	☐ 200W	– SET
	☐ METAL HALIDE	☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
		☐ W/2–BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
9	MOUNTING BRACKET	STEEL SHEET	
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	


SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (CEILING MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN–L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B – V L H – D 1 – A 0 1	

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

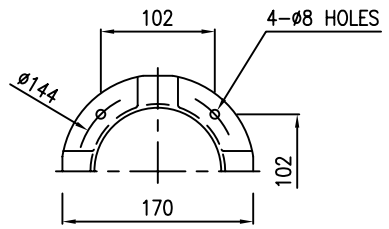

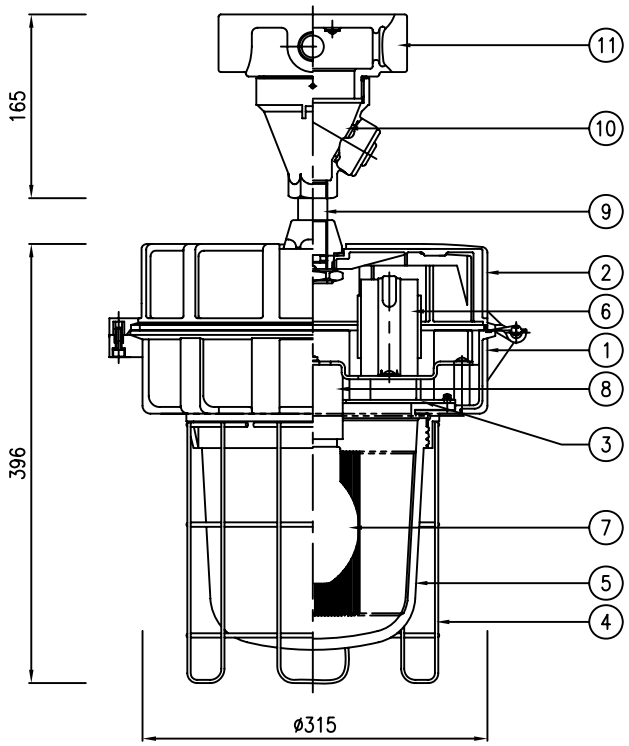

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 150W	– SET
		☐ 175W	– SET
	☐ H. P. SODIUM	☐ 200W	– SET
	☐ METAL HALIDE	☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	FLANGE	DIE CASTING ALUMINIUM	
9	NIPPLE	STEEL	
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (CEILING MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B - V L H - D 1 - A 0 1	

* LENGTH(L) ORDER MADE.

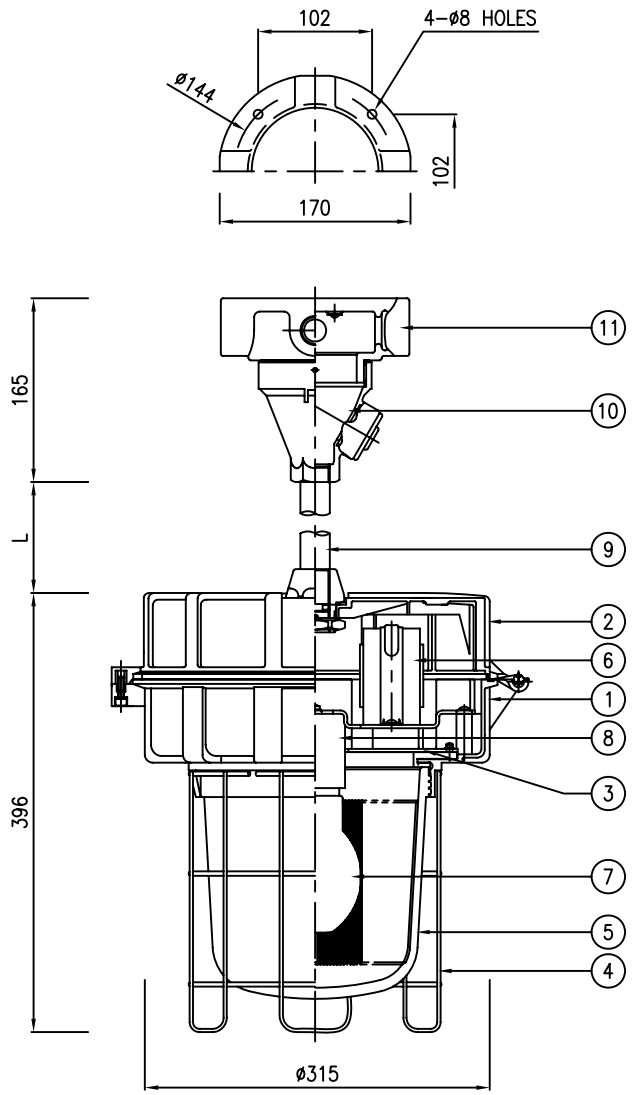

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 150W	– SET
		☐ 175W	– SET
		☐ 200W	– SET
		☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE


1.

NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	FLANGE	DIE CASTING ALUMINIUM	
9	SUSPENSION STEM	HEAVY GAUGE STEEL PIPE	
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (PENDANT MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B - V L H - D 1 - A 0 1	

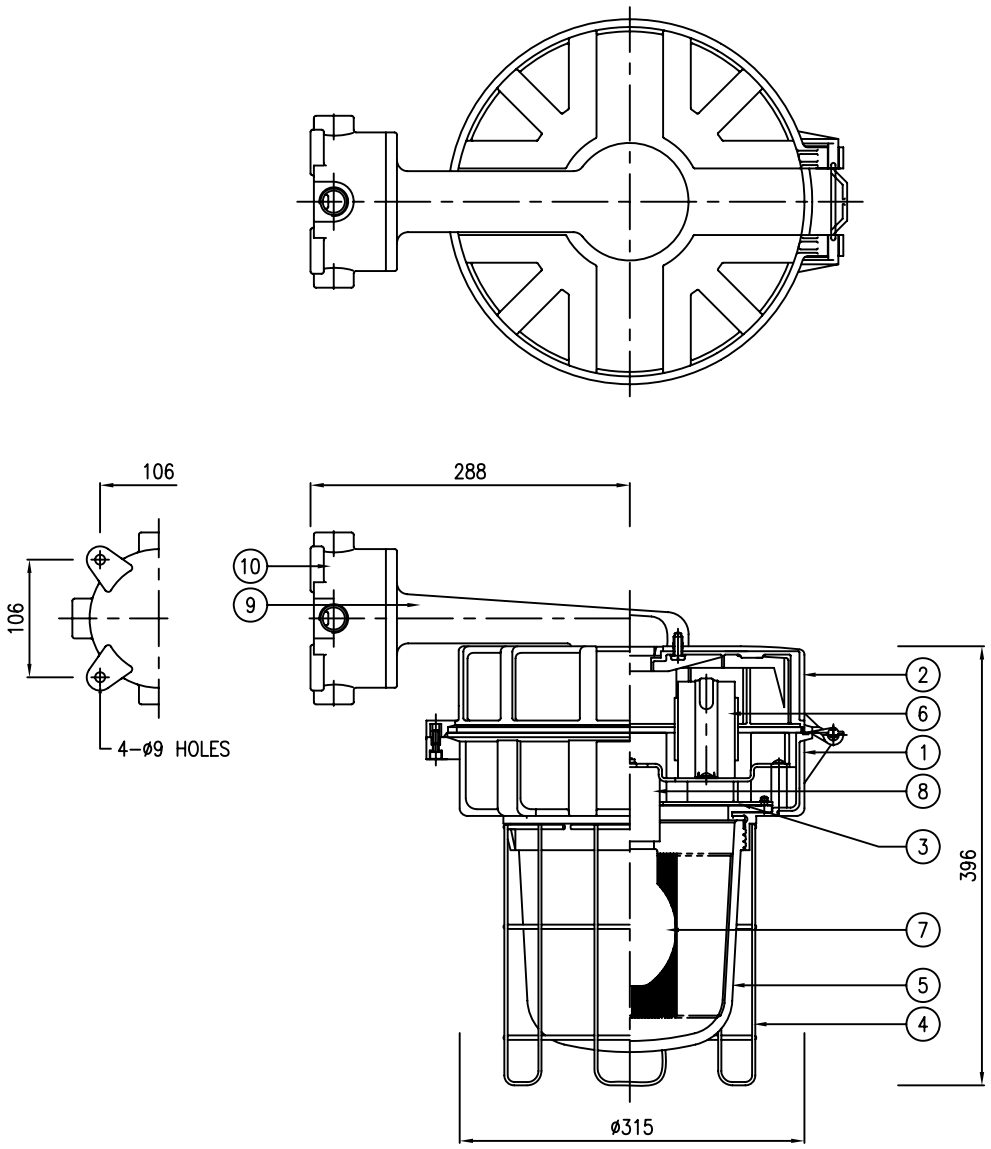

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 150W	– SET
		☐ 175W	– SET
	☐ H. P. SODIUM	☐ 200W	– SET
	☐ METAL HALIDE	☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
☐ AC110V	☐ AC230V			☐ 50Hz	
☐ AC120V	☐ AC240V			☐ 60Hz	
☐ AC208V	☐ AC277V				
☐ AC220V	☐				

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
		☐ W/2–BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
10	MOUNTING BOX	CAST ALUMINIUM ALLOY	
9	BRACKET	CAST ALUMINIUM ALLOY	
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (90° BRACKET MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN–L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	DARK GRAY	DRAWING NO.	N B – V L H – D 1 – A 0 1	

* LENGTH(L) ORDER MADE.

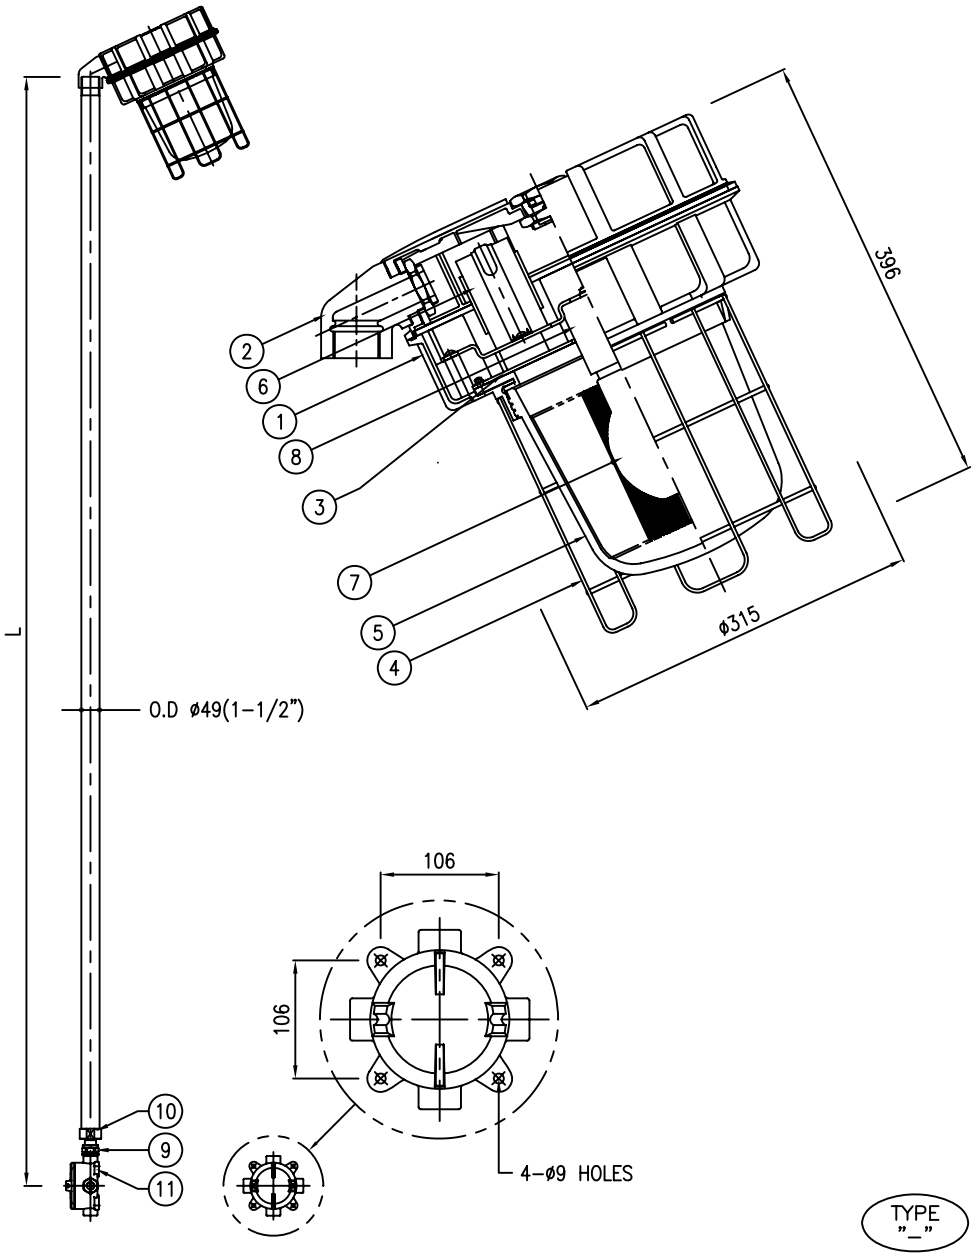

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR ☐ H. P. SODIUM ☐ METAL HALIDE	☐ 150W	– SET
		☐ 175W	– SET
		☐ 200W	– SET
		☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
THREAD	☐ NPT ☐ PF ☐ MM ☐	
SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐	
LOCATION	P, 1, 3, 2	☐ P-1 ☐ P-2 ☐ P-1-2 ■ P-1-2-3
	☐ W/2-BLIND PLUGS ☐ NONE	

NOTE

1.


NO	PARTS	MATERIAL	REMARK
11	MOUNTING BOX	CAST ALUMINIUM ALLOY	
10	SOCKET	CARBON STEEL	
9	UNION COUPLING	CARBON STEEL	
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	STANCHION HOOD	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (STANCHION MTG. TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES	CLASS OF PROTECTION	Ex nR II T*	
COLOR FINISHING	LTG. FIXTURE : DARK GRAY POLE : HOT DIP GALVANIZED	DRAWING NO.	N B - V L H - D 1 - A 0 1	

* LENGTH(L) ORDER MADE.

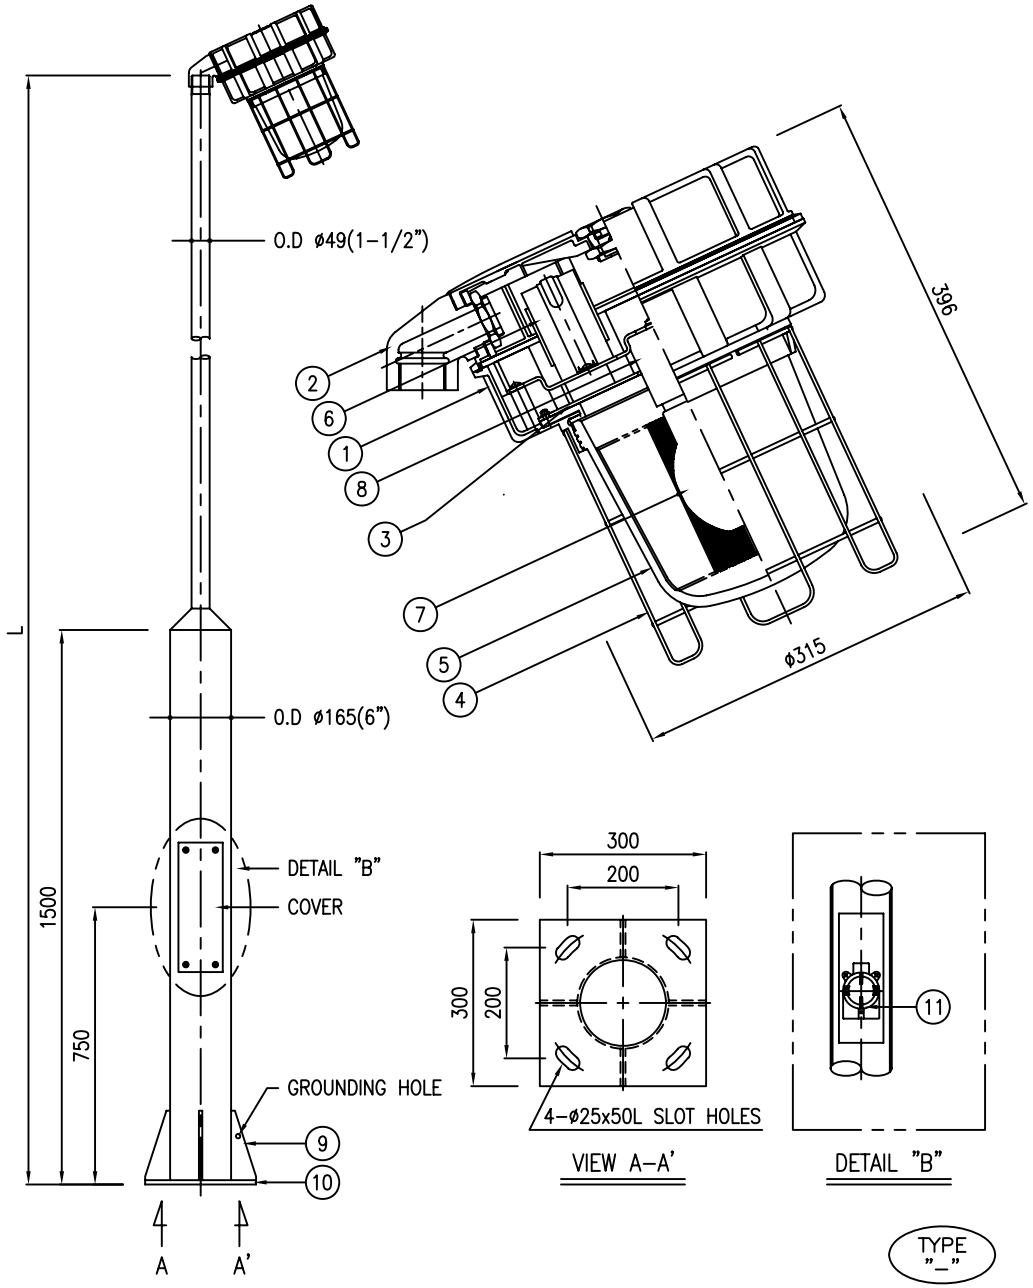

VIEW A-A'

DETAIL "B"

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	☐ MERCURY VAPOR	☐ 150W	– SET
		☐ 175W	– SET
	☐ H. P. SODIUM	☐ 200W	– SET
	☐ METAL HALIDE	☐ 250W	– SET

SUPPLY VOLTAGE				FREQUENCY	
	☐ AC110V	☐ AC230V		☐ 50Hz	
	☐ AC120V	☐ AC240V		☐ 60Hz	
	☐ AC208V	☐ AC277V			
	☐ AC220V	☐			

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED	■ EXCLUDED	
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	LIGHTING ☐ L-1 ☐ L-2 ☐ L-1-2 (1 2)
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE


1.


NO	PARTS	MATERIAL	REMARK
11	JUNCTION BOX	CAST ALUMINIUM ALLOY	
10	BASE PLATE	STEEL PLATE	12.0t
9	SUPPORT	STEEL PLATE	9.0t
8	LAMP HOLDER	PORCELAIN W/MOGUL SOCKET	E39
7	LAMP	H.I.D LAMP	SEE SELECTION TABLE
6	BALLAST	FOR H.I.D LAMP	HIGH POWER FACTOR
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	INNER REFLECTOR	HIGE GRADE ALUMINIUM SHEET	
2	STANCHION HOOD	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	H.I.D LTG. FIXTURE (PEDESTAL TYPE)		APPLICATION AREA	
CAT NO.	EVN-L SERIES		CLASS OF PROTECTION	Ex nR II T*
COLOR FINISHING	LTG. FIXTURE : DARK GRAY POLE : HOT DIP GALVANIZED		DRAWING NO.	N B - V L H - D 1 - A 0 1

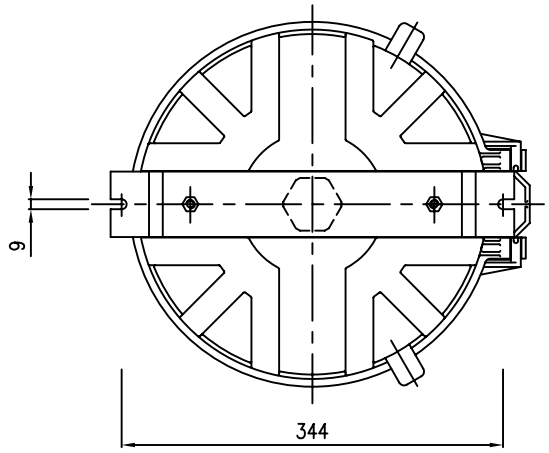

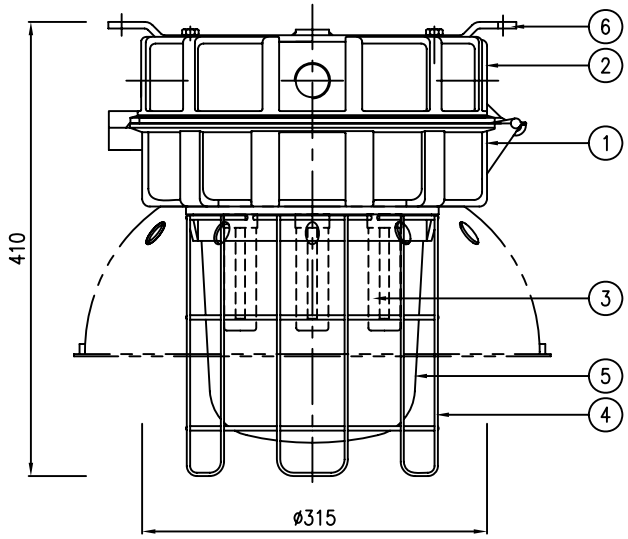

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	COMPACT FLUORESCENT	☐ 13W x 3	– SET
		☐ 18W x 3	– SET
		☐ 26W x 3	– SET

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

OPTION	EXTERNAL REFLECTOR	☐ INCLUDED ■ EXCLUDED
		☐ DOME TYPE ☐ 30° ANGLE
		MATERIAL: F. R. POLYESTER

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4
		☐ W/2–BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
6	MOUNTING BRACKET	STEEL SHEET	
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	LAMP	COMPACT FLUORESCENT	SEE SELECTION TABLE
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	


SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	COMPACT FL. LTG. FIXTURE (CEILING MTG. TYPE)	APPLICATION AREA	
CAT NO.	EVN SERIES	CLASS OF PROTECTION	Ex nR II T5 IP65
COLOR FINISHING	DARK GRAY	DRAWING NO.	NB-VLH-D1-A01

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

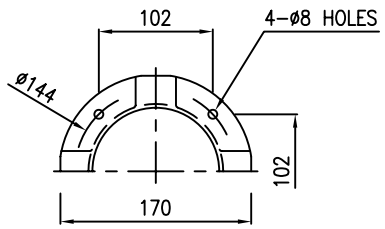

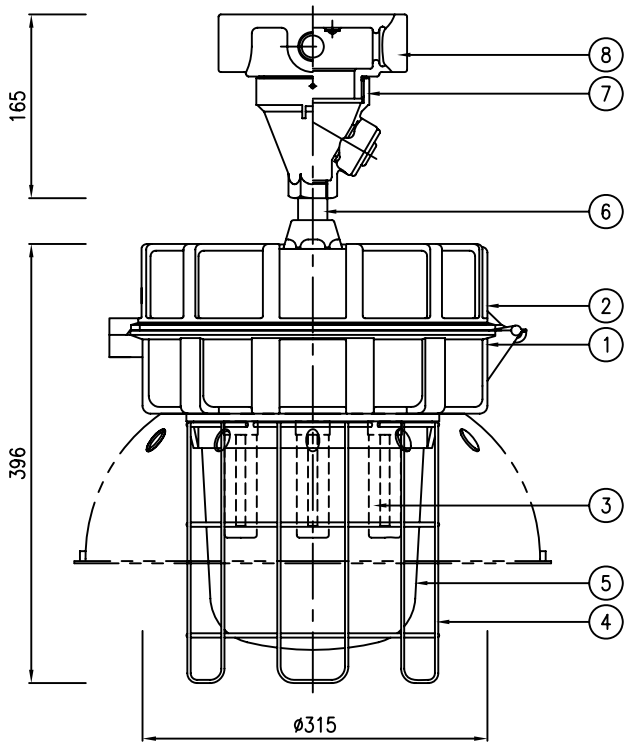

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	COMPACT FLUORESCENT	☐ 13W x 3	– SET
		☐ 18W x 3	– SET
		☐ 26W x 3	– SET

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

OPTION	EXTERNAL REFLECTOR	☐ INCLUDED ■ EXCLUDED
		☐ DOME TYPE ☐ 30° ANGLE
		MATERIAL: F. R. POLYESTER

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE

1.


NO	PARTS	MATERIAL	REMARK
8	MOUNTING BOX	CAST ALUMINIUM ALLOY	
7	FLANGE	DIE CASTING ALUMINIUM	
6	NIPPLE	STEEL	
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	LAMP	COMPACT FLUORESCENT	SEE SELECTION TABLE
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	COMPACT FL. LTG. FIXTURE (CEILING MTG. TYPE)	APPLICATION AREA	
CAT NO.	EVN SERIES	CLASS OF PROTECTION	Ex nR II T5 IP65
COLOR FINISHING	DARK GRAY	DRAWING NO.	NB-VLH-D1-A01

* LENGTH(L) ORDER MADE.

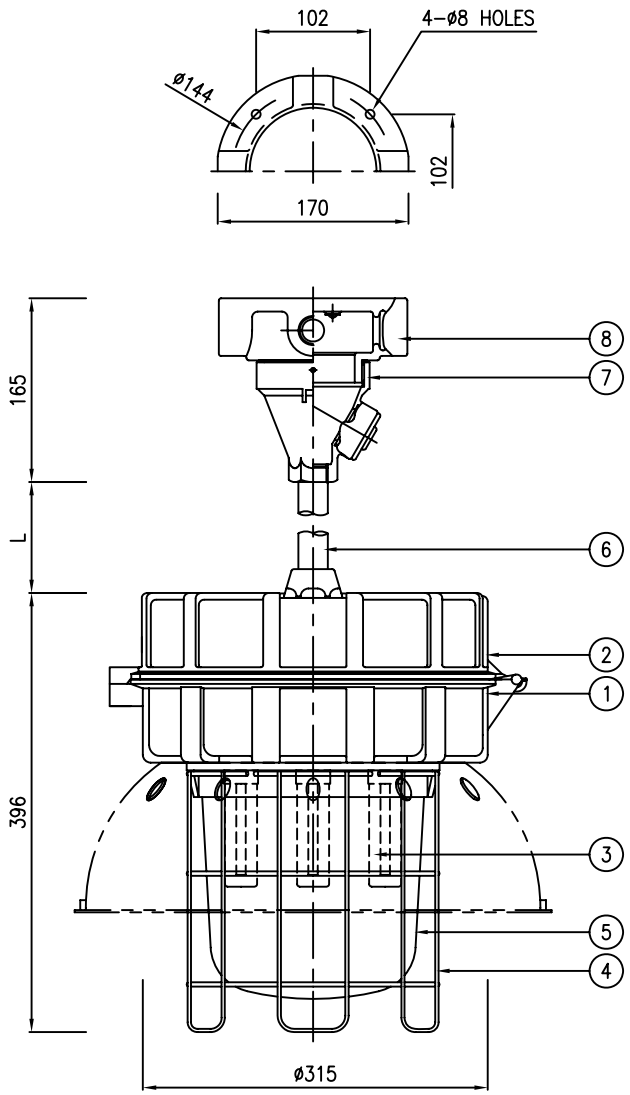

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	COMPACT FLUORESCENT	☐ 13W x 3	– SET
		☐ 18W x 3	– SET
		☐ 26W x 3	– SET

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

OPTION	EXTERNAL REFLECTOR	☐ INCLUDED ■ EXCLUDED	
		☐ DOME TYPE ☐ 30° ANGLE	
		MATERIAL	F. R. POLYESTER

NOTE
1.


NO	PARTS	MATERIAL	REMARK
8	MOUNTING BOX	CAST ALUMINIUM ALLOY	
7	FLANGE	DIE CASTING ALUMINIUM	
6	SUSPENSION STEM	HEAVY GAUGE STEEL PIPE	
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	LAMP	COMPACT FLUORESCENT	SEE SELECTION TABLE
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	


SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	COMPACT FL. LTG. FIXTURE (PENDANT MTG. TYPE)	APPLICATION AREA	
CAT NO.	EVN SERIES	CLASS OF PROTECTION	Ex nR II T5 IP65
COLOR FINISHING	DARK GRAY	DRAWING NO.	NB-VLH-D1-A01

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

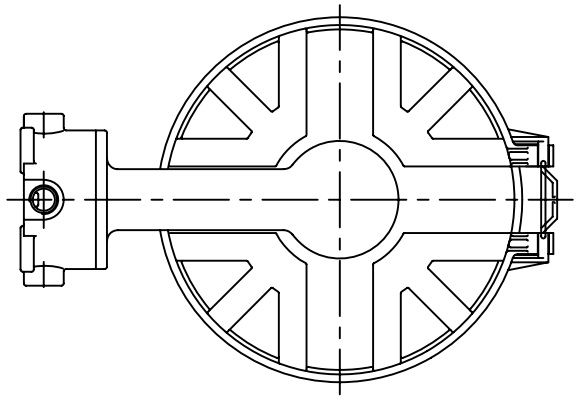

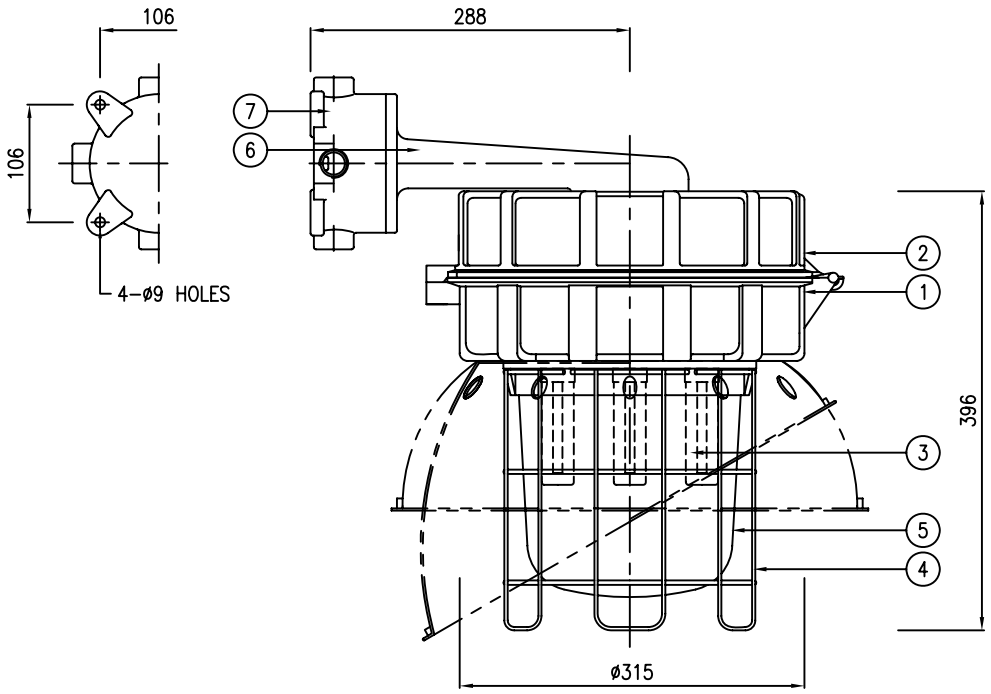

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	COMPACT FLUORESCENT	☐ 13W x 3	– SET
		☐ 18W x 3	– SET
		☐ 26W x 3	– SET

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz	
HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐		
	SIZE	☐ 3/4" ☐ 1" ☐ M25 ☐		
	LOCATION	1 / 2 / 4 / 3	☐ 1–2 ☐ 1–3 ☐ 1–2–3 ☐ 1–2–3–4	
		☐ W/2–BLIND PLUGS ☐ NONE		

OPTION			
EXTERNAL REFLECTOR	☐ INCLUDED ■ EXCLUDED		
	☐ DOME TYPE	☐ 30° ANGLE	
	MATERIAL	F. R. POLYESTER	

NOTE

1.

NO	PARTS	MATERIAL	REMARK
7	MOUNTING BOX	CAST ALUMINIUM ALLOY	
6	BRACKET	CAST ALUMINIUM ALLOY	
5	GLOBE	HEAT RESISTANT HARD GLASS	
4	GUARD	STAINLESS STEEL WIRE	SUS304
3	LAMP	COMPACT FLUORESCENT	SEE SELECTION TABLE
2	COVER	ENGNEERING PLASTIC	
1	BODY	ENGNEERING PLASTIC	

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	COMPACT FL. LTG. FIXTURE (90° BRACKET MTG. TYPE)	APPLICATION AREA	
CAT NO.	EVN SERIES	CLASS OF PROTECTION	Ex nR II T5 IP65
COLOR FINISHING	DARK GRAY	DRAWING NO.	NB-VLH-D1-A01