MVD-134SD

Video Distributor Amp

장비개요 및 성능

Description

○ 본 장비는 1개의 Analog Video 신호를 입력 받아 3개의 Analog Video 신호로 분배 증폭하는 장비로 1 Input 3 Output 4 Channel로 구성되어 있다.

Features

○ 방송급 화질의 고 대역 주파수 특성을 가지고 있으며, 신호의 왜율, LOW LOSS가 없는 우수한 특성의 분배 기능을 가지고 있다.

○ 입력된 Video 신호의 유 • 무를 시각적으로 확인(LED)이 가능하며, 신호의 유 • 무를 외부 장비로 알려주는 Alarm 단자가 내장되어 있다.

○ 입력된 Video 신호의 Level을 조절 할 수 있으며, 슬림형 19" Rack Type으로 제작되어 있다.

Panel Drawing



Specifications

○ Video Part

- Input/Output number : 1in x 3out x 4ch
- Input/Output type : composite video 1Vp-p, 75ohm
- Input/Output connector : BNC
- The gain : 45IRE ~ 185IRE
- Frequency response : ±0.1dB(750KHz ~ 4.7MHz)
- Crosstalk : below 60dB
- S/N : below 65dB

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia +65 81335582 Fax. +65 67828910
China +86 021 54249750 Fax. +86 021 54240199
Singapore +65 81335582 Fax. +65 67828910
Korea +82 2 2026 1200 Fax. +82 2 2026 1217

MVD-134SD

Video Distributor Amp

장비개요 및 성능

Specifications

○ Case & Power Part

- Power source : AC 220V, 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 10Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

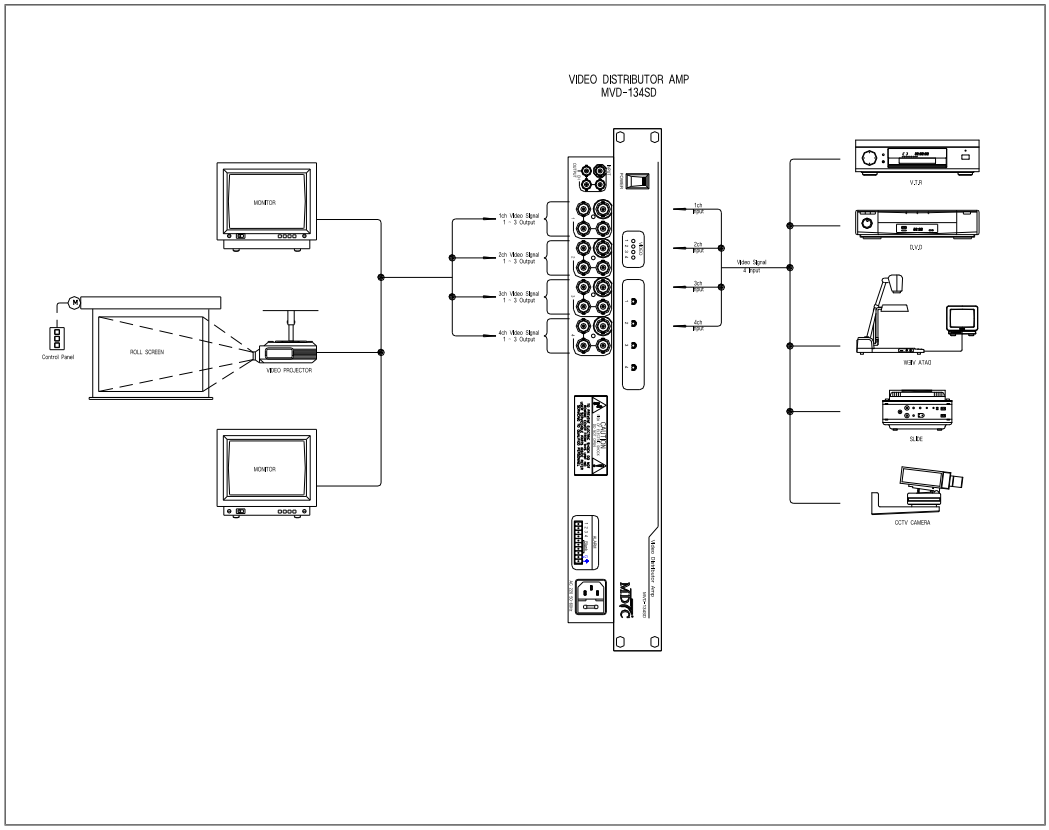

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217