MRMS-3201

RGB Selector Switcher

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Description

○ It allows 32 RGB input signals with R.G.B.HD.VD. to be switched to one compatible display device.

Features

○ Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear BNC connector makes operation easy.

○ 32 selector switches with lamps which allow to control individually.

○ LED helps to view and confirm status of the selected switch and the communicated remote control.

Panel Drawing



Specifications

○ Video Part

- Input/Output number : 32 x 1
- Input/Output type : RGBHV
- Input/Output connector : 5 BNC
- Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
- Input/Output impedance : 75Ohm ± 1%

MAX **Max Digital Tech Co.,Ltd**

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MRMS-3201

RGB Selector Switcher

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr


Specifications

○ Remote Control Part

- Serial control : 1 RS-232, D-sub 9pin connector
- Lamp out : +12V
- Remote input : dry Contact

○ Case & Power Part

- Power source : AC 85 ~ 240V, 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 40Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 178(H) * 300(D) mm

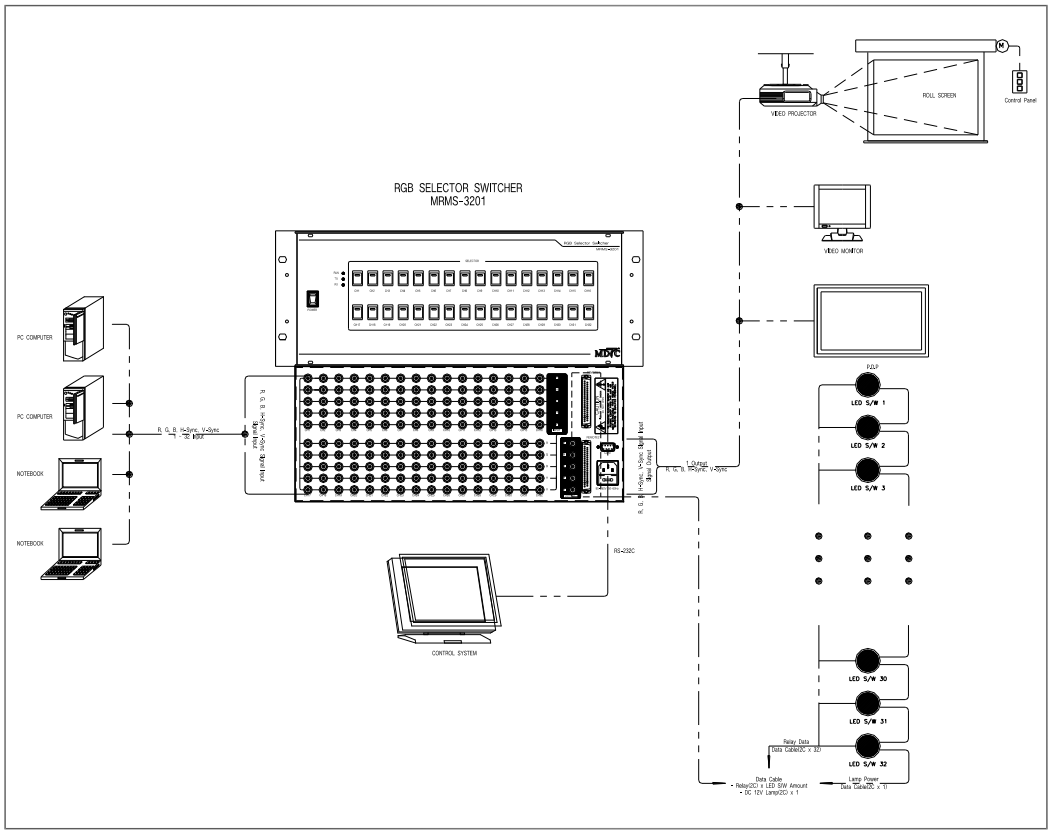

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217