MAVS-1601

A/V Selector Switcher

장비개요 및 성능

Description

○ 본 장비는 16개의 입력된 Analog Audio & Video 신호를 해당출력 1 Channel에 선택하여 절체시켜주는 장치이다.

Features

○ 전면의 조작 KEY로 원하는 입력을 제어할 수 있으며, RS-232C Port를 이용하여 Remote 제어 가능토록 되어 있다.

○ 전원 OFF시에도 최종 연결 상태값을 가지고 있도록 Memory Back-up 기능이 있다.

○ FND DISPALY 채용으로 출력되는 입력상태를 확인 할 수 있다.

○ 외부 방송장비와 VIDEO SYNC을 맞추기 위한 SYNC 단자가 있다.

Panel Drawing

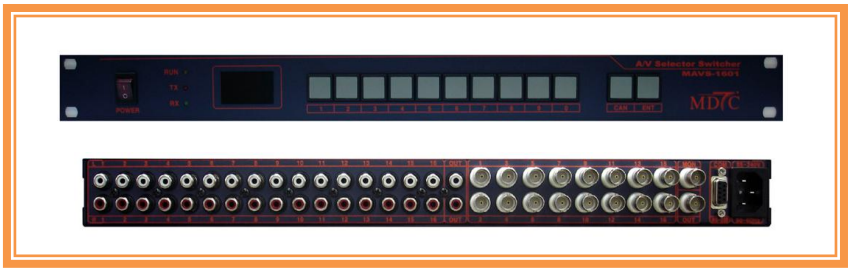

Specifications

○ Audio Part

- Input/Output number : 16 x 1
- Input/Output type : Unbalanced stereo, 600ohm
- Input/Output connector : RCA
- Max level : 14dBm
- Frequency response : ±0.1dB(20Hz ~ 20kHz)
- Crosstalk : below 80dB
- S/N : below 70dB (20Hz ~ 20kHz)

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MAVS-1601

A/V Selector Switcher

장비개요 및 성능

Specifications

○ Video Part

- Input/Output number : 16 x 1
- Input/Output type : Composite video 1Vp-p, 75ohm
- Input/Output connector : BNC
- Frequency response : ±0.1dB(750KHz ~ 4.7MHz)
- Differential phase error : 0.1°
- Differential gain error : 0.1%
- Crosstalk : below 60dB
- Sync : Standards, BNC, 75ohm

○ Remote Control Part

- Serial control : 1 RS-232/422, D-sub 9pin connector

○ Case & Power Part

- Power source : AC 85 ~ 240V 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : Below 25Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

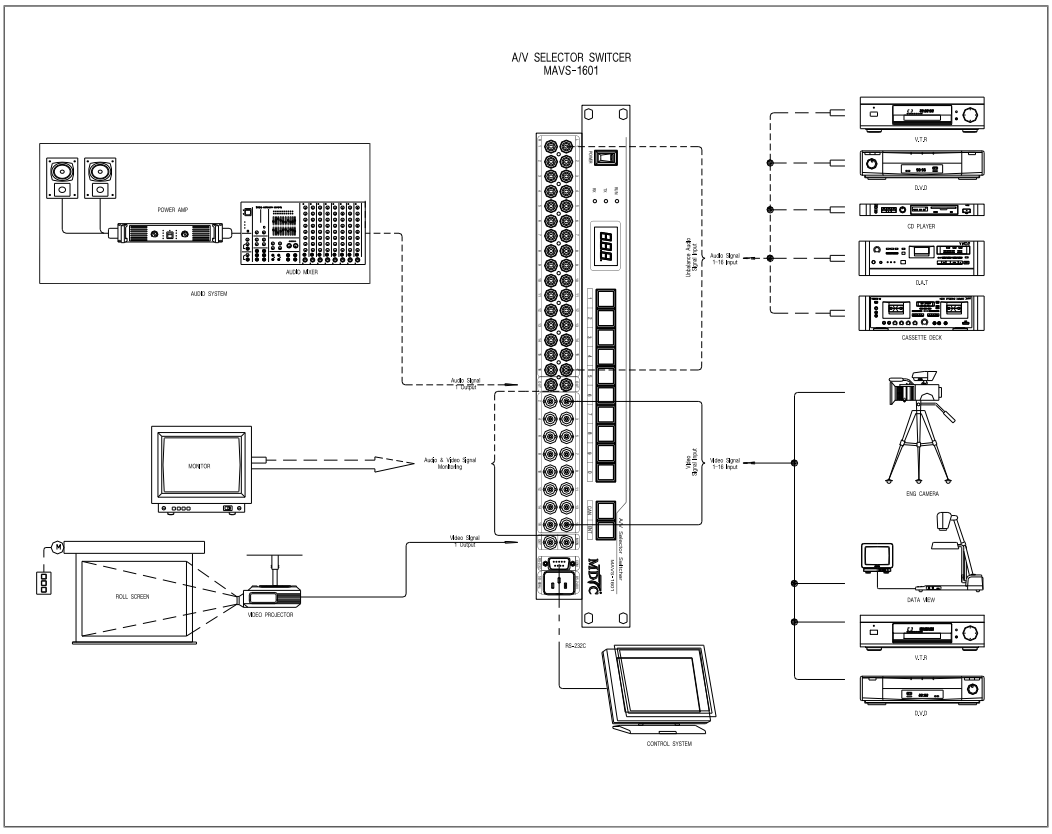

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217