IDEAL SOLUTION FOR PORTABLE PRINTING

MOBILE PRINTER

LK-P22MI

- Bluetooth 4.2 Technology
  (Multiple Simultaneous Bluetooth Connection)
- Easy Bluetooth connection setting by using NFC function!
- Durability emphasized structural design
- The highest printing speed in its class (100mm/s)
- Large roll capacity (Ø40mm)
- Long battery life (1510mA)



Made for iPhone iPad




MSR & IC CARD

NFC


No more complicated Bluetooth connection setting!

Easy Bluetooth connection setting by using NFC function!
Equipped NFC capability for easier printer setting

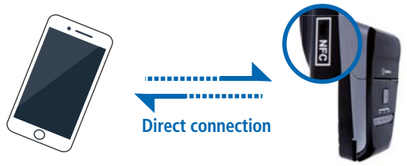

CRADLE

4 CRADLES IN 1 SET

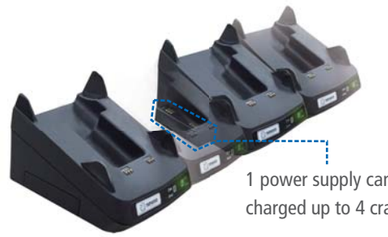


1 power supply can be
charged up to 4 cradles in a set

SPECIFICATION

ITEM		TYPE
MODEL		LK-P22MI
PRINTING	METHOD	Direct Thermal
	SPEED	100mm / sec
DOT DENSITY		203 DPI
DOT PITCH		8dots /mm, 0.125 pitch
EFFECTIVE PRINTING WIDTH		48mm, 384dots/line
CHARACTER PER LINE		Font A(12 x 24) 32 columns Font B(9 x 17) 42 columns
PAPER	TYPE	Thermal Paper
	WIDTH	Max. 58mm
	THICKNESS	0.06mm
	ROLL DIAMETER	Max. ø 40mm
	ROLL CORE INNER	12.5mm ± 0.5mm
RELIABILTY	TPH LIFE	50km
	PULSE ACTIVATION	50,000,000 pulse or more(12.5% Print Ratio)
CHARACTER SET	ALPHA NUMERIC CHARACTER	95
	EXTENDED GRAPHIC	128 x 18page(1 space page)
	INTERNATIONAL CHARACTER	14
BARCODE	1D	EAN-8,EAN8(+2+5), EAN-13, EAN13(+2+5), Codabar, Code11, Code39, Code93, Code128, ITF, LUPC-A(+2+5), UPC-E,UPC-E(+2+5), Planet, UPC-A etc.
	2D	QR, PDF417, MicroPDF417, Maxicode, Datamatrix, Aztec, RSS14, TLC39
FONTS		FontA(12x24), FontB(9x17), Asian Font(KOR,JPN, CHN_GB2312,CHN_BIG5), Font0/1/2/4/5/6/7, Resident TTF, Downloadable TTF, FontA~H, FontGS, Resident TTF(Font0), Font1 ~ 8
EMULATION		ESC/POS, CPCL, ZPL
DRIVER		Window Printer Driver(10, 2012, 8.0/8.1, 7, 2008, Vista, 2003, XP, 32 & 64bit), Windows (CE 4.2 & 5.0 & 6.0 & 7.0 / Mobille 5.0 & 6.0)
SENSOR		Paper end, Cover open, Black mark
INTERFACE	STANDARD	USB
	OPTION	Bluetooth Smart Ready Ver 4.2 or Wi-Fi (802.11a/b/g/n)
BATTERY CHARGER		AC/DC Charger
BATTERY		7.4V 1510mAh Li-ion, 2.5Hrs Charging time, 55Hrs Stand-by
EMV II (Optional)	MSR CARD STANDARD	ISO 1&2&3 or ISO 1&2&JIS-II
	MSR TRACK	ISO Track 1&2&3
	MSR HEAD LIFE CYCLE	500,000 Passes(minimum)
	ICR CARD STANDARD	ISO 7816
	ICR HEAD LIFE CYCLE	100,000 Passes(minimum)
DIMENSION		80mm x 135.8mm x 44mm (W x D x H)
WEIGHT		280.8g (With Battery)
TEMPERATURE	OPERATION	-10 ~ 50°C
	STORAGE	-20 ~ 60°C
HUMIDITY	OPERATION	35 ~ 80%
	STORAGE	10 ~ 90%

● All specification and desings are subject to change without notice.

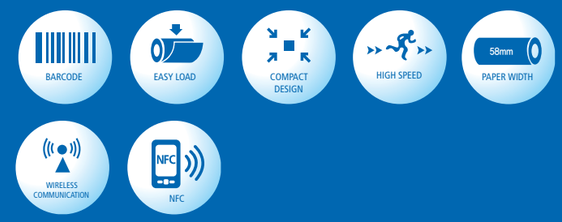

www.miniprinter.com

sewoo YES WE MAKE IT

J.STEPHEN Lab., Ltd.
28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do,
447-210 Republic of Korea
T. +82-31-8077-5000 F. +82-31-459-8880
www.miniprinter.com