MCPU-1216D

Camera Power Control Unit

장비개요 및 성능

Description

○ 본 장비는 Camera Power Controller로서 여러 곳이나 한자리에 다수로 설치된 Camera Power를 공급하고 Remote로 ON/OFF 할 수 있는 장비이다.


Features

○ 기능은 Remote 제어시 개별 제어 및 ALL 제어기능이 있으며 주변기기와 I/F하여 운영 S/W로도 제어가 가능하다.

○ 장비의 Front에 제어용 Switch가 부착되었으며 S/W에 의한 제어와 통신제어 및 Lan 제어가 가능토록 Port를 내장하고 있다.

○ Camera Power공급은 DC12V를 공급하며, 수용 채널은 16채널이다.

Panel Drawing

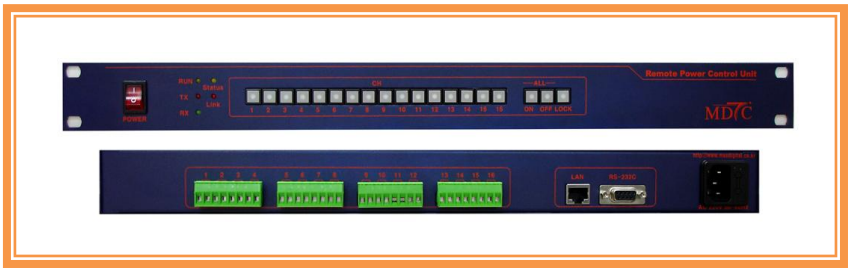

Specifications

○ General Part

- CPU : One Chip 8 Bit Micro Processor 89C52
- Memory : 93C66
- Communication serial asynchronous : RS-232C 9600BPS, N, 8, 1, TCP/IP
- Output port : 16 channel
- Output power : DC 12V
- Control method : manual, program control
- Control shape : one on/off, all on/off
- Correspondent ports enable to control operating software : RS-232C, TCP/IP

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia +65 81335582 Fax. +65 67828910
China +86 021 54249750 Fax. +86 021 54240199
Singapore +65 81335582 Fax. +65 67828910
Korea +82 2 2026 1200 Fax. +82 2 2026 1217

MCPU-1216D

Camera Power Control Unit

장비개요 및 성능

Specifications

○ Case & Power Part

- Power source : AC 85 ~ 240V 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : Below 30Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217