1Ø 커넥터형 노이즈 컷 트랜스포머

CE RoHS



Specifications

- Input voltage : AC220V
- Output voltage : AC220V
- Frequency : 50/60 Hz
- Capacity : 300VA~5kVA
- Insulation resistance : 100MΩ이상 / DC500V
- Dieletric withstand : AC3000V / 1min
- Oper. temperature : 0~50℃
- Oper. humidity : 30~95%

Connector Type

MODEL	용량(VA)	W	H	D	a	b	φ	Weight(kg)
WYNC22-300C	300	120	138	155	100	100	7x10	7.9
WYNC22-500C	500	144	162	190	120	120	7x10	13
WYNC22-1KC	1K	171	191	240	140	130	7x10	20
WYNC22-1.5KC	1.5K	203	229	210	170	140	7x10	28
WYNC22-2KC	2K	203	229	210	170	140	7x10	35
WYNC22-3KC	3K	204	258	230	180	160	9x15	40
WYNC22-5KC	5K	204	258	260	180	190	9x15	54


※ 기타 : 주문에 의함. (Option)

제품 주요 용도(Major applications)

- 반도체 제조 장비의 전원 공급용
- 정밀 계측기의 전원 공급용
- 의료기,철도,전산센터등의 주전원 공급용
- 교통망 신호 제어등의 전원 Line
- 노이즈 발생이 심한 전원 Line
- MICOM 제어기기, PLC, OA, FA 기기의 전원 공급용


- Supply power to the semiconductor manufacturing equipment.
- Supply power to precision meters
- Supply main power to medical devices, railroads and computer center
- Power supply line for transportation network signal control.
- Power supply line producing high level of noise.
- Supply power to Micom controls and PLC, OA and FA equipment.

Connection Diagram

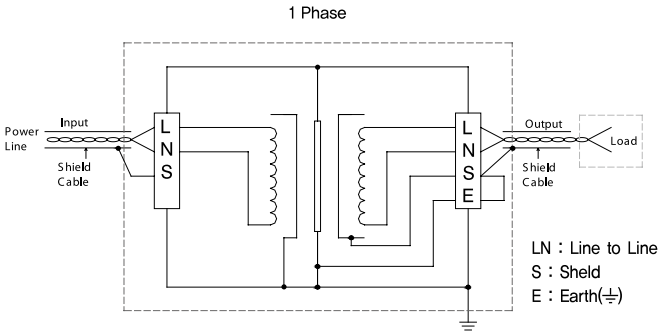

Connector Pin Connection

Pin-1 : 0 V
Pin-2 : 220 V
Pin-3 : Shield
Pin-4 : E (Earth)



Dimension

