The world class safety

SVD-UL2500

UL LISTED









MORE THAN CONFIDENCE

SHINJIN SAFE-TECH

Stainless Steel Swing Vault Door

SVD-UL2500 Vault door

is newly developed vault door, which has security plus fire-resistance.

Features

- UL Class 1 certificated
- Reinforced Life-protection function : emergency ventilator, alarm system
- Design : “Modern&Elegant”, Ni-Cr coated round handle gives you smooth-touch and modern exterior view.
- Tempered glass relockers installed inside the door, automatic locking system against external shocks.

Specifications

- Door : High-strength concrete : Filled door thickness-Class 1(125mm)
- Locking : Three UL-listed combination dial locks, 1,000,000 code-swichable, protected by relocking system with tempered glass.
- Emergency ventilator : Installed inside the door, it brings fresh air into the room if someone trapped inside the room.
- Alarm system : Lamp turned on after the beep. In case someone gets stuck, push the button mounted on the door.

Options



Time lock

UL listed time lock with three movements.

Boltwork

Square type or round type are available.



Square type



Round type





Daygate


Grilled type daygate for day time use.

- Light Control : Micro-switch is fitted into hinge to control light in the vault room when door is open/close.

Size

Grade of Class	Frame Size			Door Size			Weight(kg)
	W	H	D	W	H	D	
Class 1	1300	2120	330	1000	1950	252	1200

(Unit : mm)

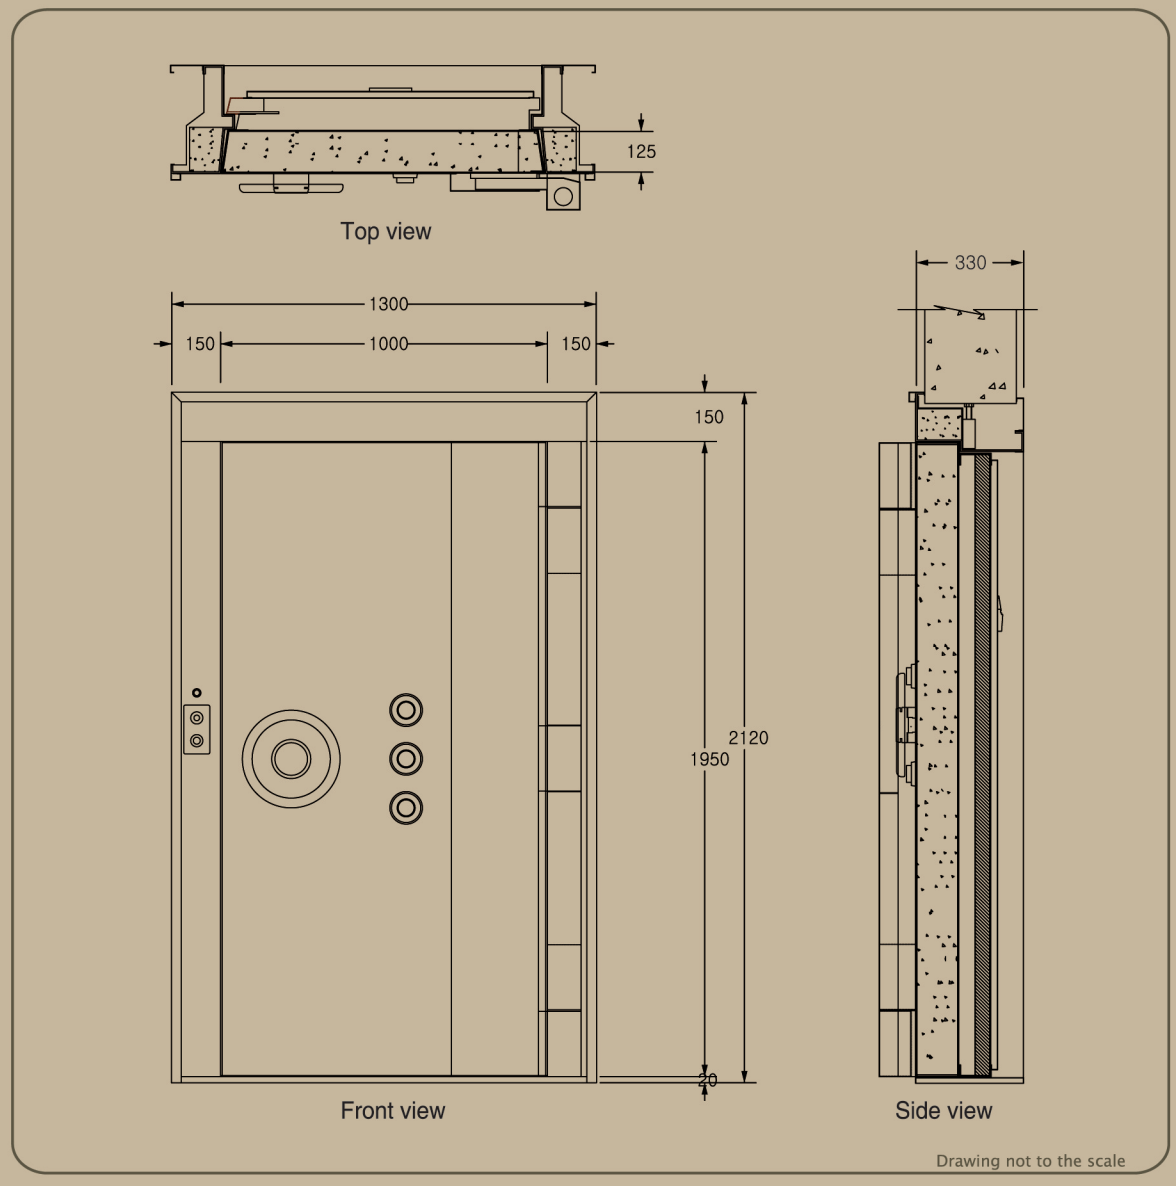

Drawing not to the scale






UL test of vault door

Copyright© 2010.12 By SHINJIN SAFE TECH Co.,Ltd.All rights reserved.

www.shinjinsafe.co.kr

SHINJIN SAFE-TECH

Head office
11Block 7Lot, 772-2, Wonsi-Dong Danwon-Gu
Ansan-Si Gyeonggi-Do, Korea
Tel. +82.31.497.8833 | Fax. +82.31.497.0414

Branch office
3Na-111, Sihwa Ind. 1269-10, Jungwang-Dong
Siheung-Si Gyeonggi-Do, Korea
Tel. +82.31.497.8012~3 | Fax. +82.31.319.1027

Seoul office
7F Myung-dong ArtnouveaucentumB/D 711
Euljiro-2ga Jung-gu Seoul 199-39, Korea
Tel. +82.2.2267.8833 | Fax. +82.2.2277.0841