SHINEUI
Shineui Entec co,. Ltd

ADD : 440-17 Cheong Cheon-Dong
Pu Pyung-Ku Inchon Korea
TEL : 82-32-503-3796 FAX : 82-32-504-0261

Flow Switch
(SFS-DW)

PRODUCT SPECIFICATION SHEET



FEATURES

- This switch has excellent character in low pressure.
- This switch cannot exert harmful influence by scrap.
- This switch has multi function and can modify various structure for customer.

CONTENTS

Application 1
Features 1
Specifications ..... 1~2
Dimensions 2

APPLICATION

This switch is used in water flow sensing.
This switch has application to gas boiler and instantaneous warm water appliance, and water filtering appliance.

SPECIFICATIONS

Operating flow quantity(ℓ /min)	: ON	1.3 ± 0.3
	OFF	1.3 ± 0.3
Installation	: Vertical	
Ambient temperature	: -20 ~ 100℃(It shall not be frozen)	
Permissible fluid temperature	: -20 ~ 100℃	
Material	: Body	: NY66(G/F30%)
	Magnet	Sr - Fe
	O-ring	Silicone
	MG Plate	SUS316

www.shineui.co.kr shineui@shineui.co.kr

SPECIFICATIONS

Common use pressure		: 0.2 ~ 10 kgf/cm^2
Electrical rating	: Switching voltage	: DC100V, AC150V
	Switching current	: AC, DC 1.0A
	Ratings	: 10VA(W)
	Contact resistance	: less than 100 mΩ (included resistance)
Withstand pressure		: When water pressure = 17.5 kgf/cm^2 is added for one minute, no external leakage shall be measured and it must be no damaged on the body.
Dielectric strength		: When AC1800V(50/60Hz) is added between the connector and body for one second, it shall be no unusual, detecting current is under 3mA.
Insulation resistance		: Between terminal and outer exposed metal parts shall be 100 MΩ ever by DC 500V meggar.

DIMENSIONS

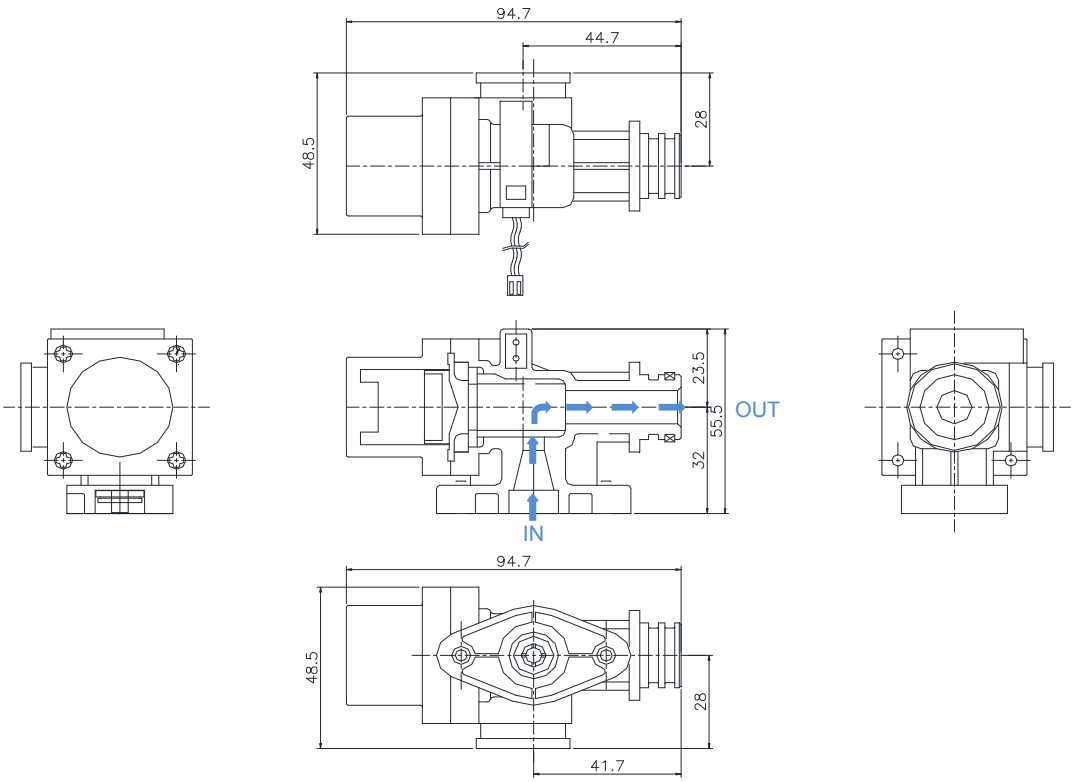


Fig 1. Flow switch

The specifications and dimensions can be changed without warning.

www.shineui.co.kr shineui@shineui.co.kr