MVUR-2400

Video UTP Receiver

장비개요 및 성능

Description

○ 본 장비는 Video UTP Receiver로서 Video신호 전송기인 Video Transmitter(MVUT-100)에서 UTP Cable로 전송된 신호를 Composite Video 신호로 출력하여주는 장치이다.

Features

○ Video 출력은 NTSC/PAL을 지원하며 UTP Cable은 CATEGORY 5, 5E, 6을 사용할 수 있으며, 송신기와 수신기 접속은 Point-to-Point로 접속하여 사용하고, PAN/TILT 제어용 RS-485신호도 UTP Cable을 통하여 제어함으로써 추가 Cable 설치가 불필요하다.

○ Camera 연결은 24채널로 구성되어 있으며, 추가 증설시에는 링크방식으로 증설이 용이하도록 설계되어있다.

Panel Drawing



Specifications

○ General Part

- Video Input Port : 24 채널
- Data Input Port : 24 채널
- Video Output Port : 24 채널 / loop out 24 채널
- Data Output Port : 1채널 (link out 1 채널)
- Video/Data 전송거리 : 1000m
- Video Input : Balanced Differential Signal 100 Ω, RJ-45
- Video Output : 1Vp-p Composite Video 75Ω, NTSC/PAL, RCA Connector
- Cable : UTP category 5, 5e, 6 AWG24-4P
- Internal Operation Frequency : 200MHz, -3dB

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MVUR-2400


Video UTP Receiver

장비개요 및 성능

Specifications

○ Case & Power Part

- Power source : AC 220V 60Hz /1A
- Temperature : 0℃ ~ 40℃
- Weight : 11.8Kg
- Type : 19" rack type
- Dimensions : 483(W) * 176(H) * 338(D) mm

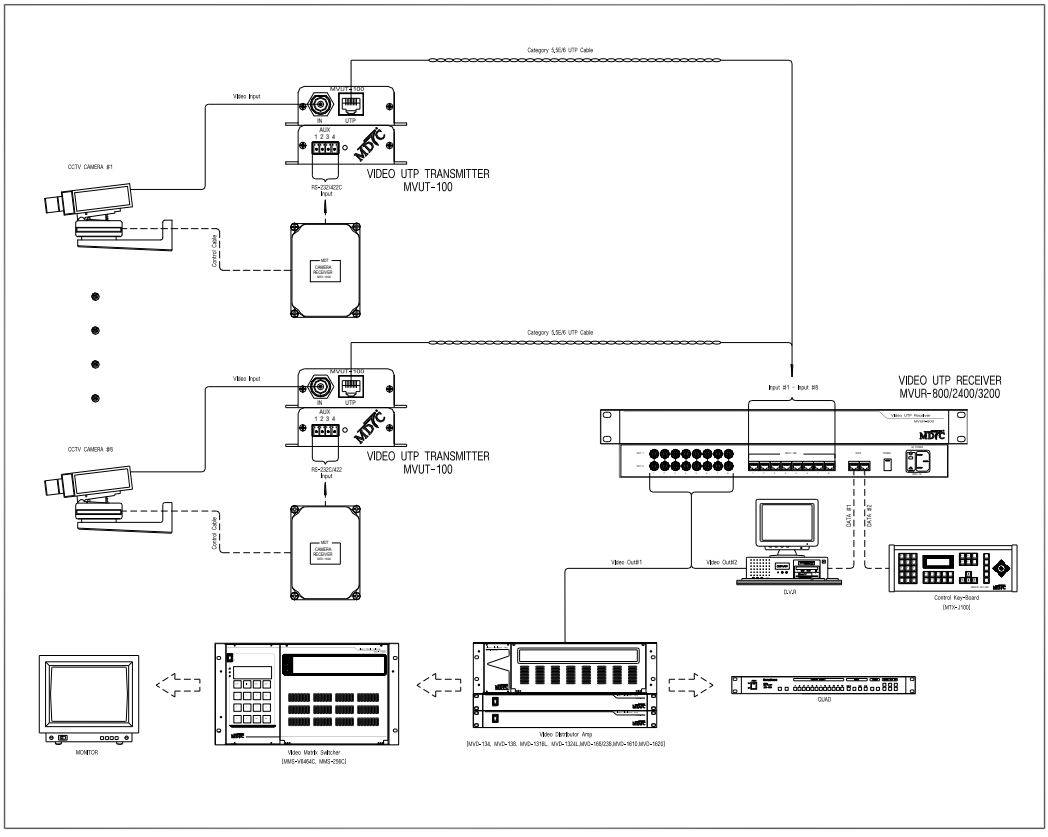

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217