MCCU-12SB

Camera Control Unit

장비개요 및 성능

Description

○ 본 장비는 화상회의 등 단거리에 설치된 회의용 마이크시스템과 연결하여 사용되는 장비로써 6대의 Camera의 Power 제어, LENS 제어, PAN/TILT 제어에 사용하는 Preset Remote Camera Control Unit 장비이다.

Features

○ 장비의 Front에 제어용 Switch가 부착되어있으며, 운영 S/W에 의한 통신제어가 가능토록 통신 Port를 내장하고 있다.

○ 6개의 카메라 Preset 지정(프리셋 지원 가능한 카메라에 한함)이 가능하며 회의용 마이크 시스템과 연결하여 입력되는 데이터에 따라 카메라의 Preset 화면을 제어한다.

○ 별도의 Preset Switch (12 Port)를 설치하여 입력되는 데이터에 따라 카메라의 Preset 화면을 제어할 수 있는 입력단자가 있다.

○ 또한 3대의 카메라 영상 중 Preset 된 1대의 카메라 영상을 출력하는 기능이 있다.

○ 장비의 동작상태를 확인할 수 있는 LED가 부착되어 한 눈에 동작상태를 확인할 수 있다.

Panel Drawing



Specifications

○ General Part

- CPU : 8 bit micro processor
- RAM : 32K X 8 SRAM
- 통신 속도 : 9600 bps
- Data bit/Stop bit : 8 bit/1 stop bit
- Parity : non parity
- Data connector port : COM1 1 RS-232/422 camera data connector, COM2 1 RS-232/422 MIC controller or PC serial data connector
- Alarm In connector port : 1 In ~ 12 In (Camera/Mic 연동(Preset저장/실행))
- Video connector port : camera 1 - 3 input, 1 output, 1 Loop output(Camera selector 3 by 1)

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MCCU-12SB


Camera Control Unit

장비개요 및 성능

Specifications

○ Case & Power Part

- Power source : AC 85 ~ 220V, 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : Below 25Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 89(H) * 300(D) mm

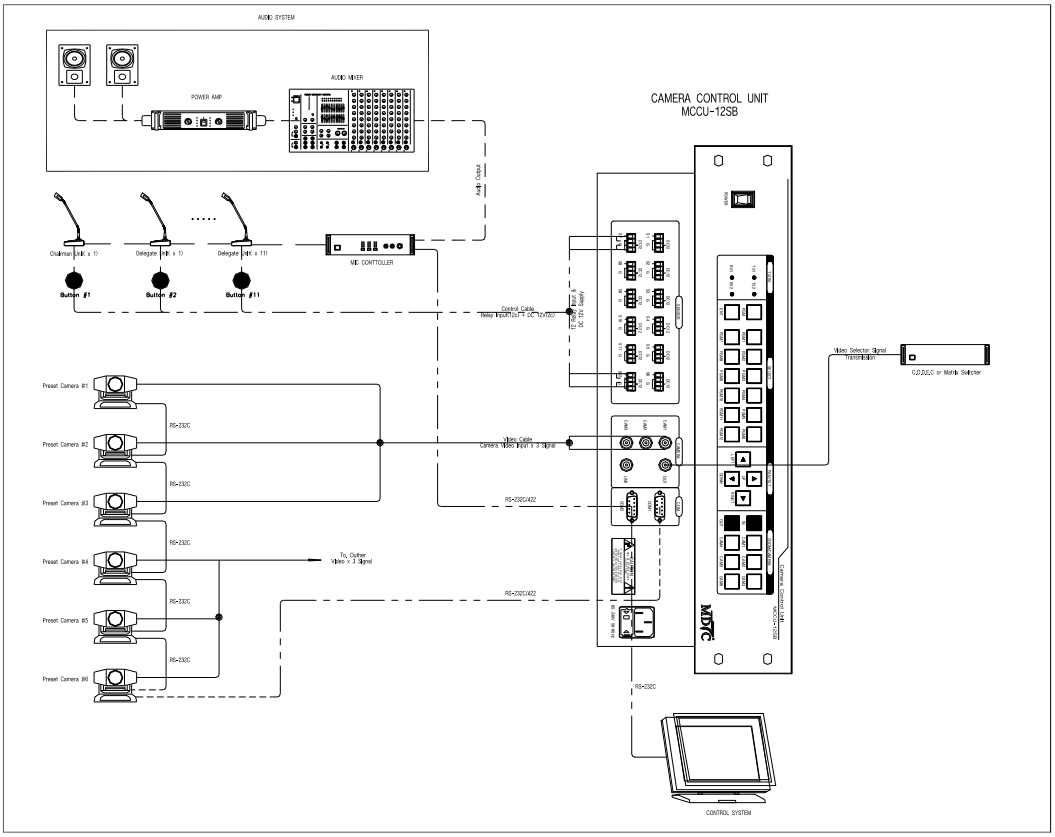

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217