


CCTV Remote Control Receiver

Specifications

	SJ3000RX
SIGNAL	
Interface	RS-232C / RS-485 / Current Loop System
Baud Rate,Parity	1200,2400, 4800, 9600/Non, Odd, Even, Mark,
Protocl	SJ-100, SJ-1000, Vicon, Pelco-D, Pelco-P, Kalatel, Bosch
Device to the drive	AC Power : Relay DC Power : Transister
Lens Voltage	Low DC ±6V, High DC ±10V
Preset Sum,Bit/Sensor	64 Point,10Bit A/D Convert,8 Ch / NO or NC
ENVIRONMENT	
Storage Temp	-40℃ ~ 80℃
Operating Temp,Relative Humidity	-20℃ ~ 70℃ , 0% ~ 90%
ELECTRICAL	
Voltage,Electrical Current	AC90 ~ 240V,1.5A / Light 8A
Power Consumption	12W @220VAC
MECHANICAL	
Dimension(WxHxD)/Weight	300 x 110 x 200,4.7kg
Case Style,Color	Aluminum die casting,Munshell Code No. 4.97BG 6.14/0.94

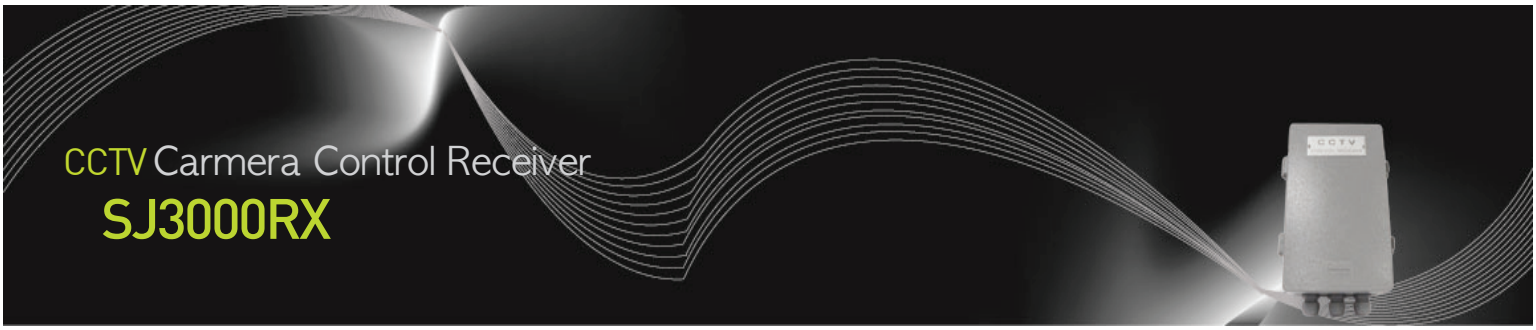


Dimensions

SJ3000RX

■ FRONT VIEW



■ SIDE VIEW

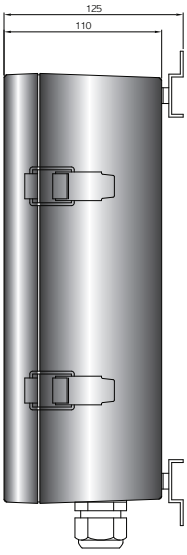

■ PCB FRONT VIEW

