
ONE LAYER R2R COATING SYSTEM

MACHINE INFORMATION

- Optional coating system of Slot Die or Micro Gravure
- PR Coater for 5μm fine patterning for securing visibility of metal mesh
- Coater capable of patterning X and Y axes simultaneously on one film
- Option selection as per the coating material conditions : Hot Air Dryer, UV Curing and IR Heater



SCHEMATIC DRAWING

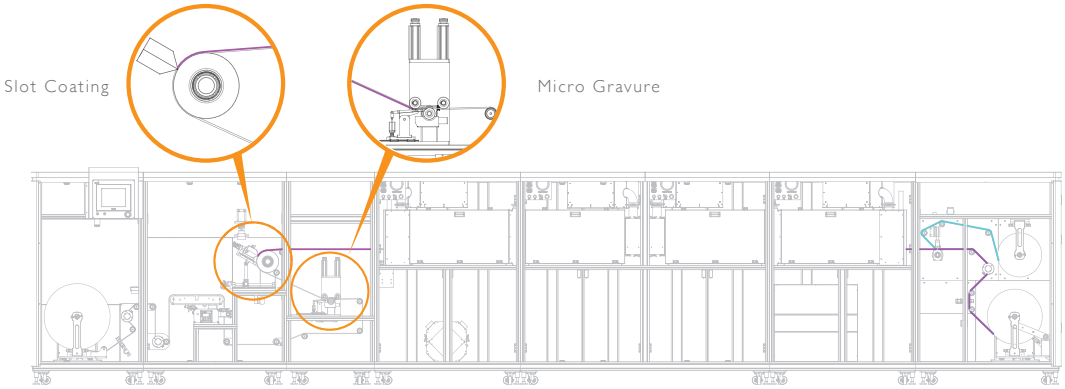

SPECIFICATIONS

Unit : mm

MACHINE SIZE	MACHINE SPEED	COATING METHOD	COATING WIDTH	WEB TENSION	DRYER	METERING PUMP
9500 x 1650 x 1980	0.1 ~ 20m/min	Micro Gravure x 1 Set, Slot Die x 1 Set	Max. 550	Max. 25 kg·f	Hot Air x 4 Set (Max.180°C)	Mono Pump Gear Pump

DETAILS

