
분전반용

Class II / PIIIM 3+1 (DS)

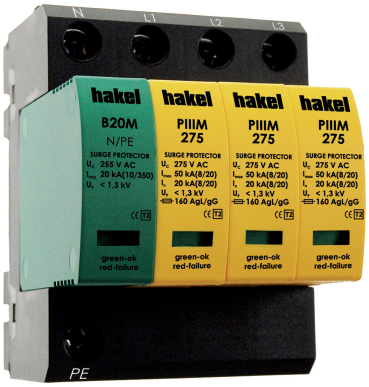

- 4 pole mov surge arrester
- 동작 상태 표시 기능
- Mov Fault Alarm 기능 (DS형)
- 3-phase power supply network TN-S, TT

- Indicators for fault and Power
- Remote contact is option

Technical data

Model		PIIIM 3+1 (DS)			
Electrical characteristics		150	275	320	440
Max. continuous operating voltage	U_C	150V	275V	320V	440V
	U_C (N-PE)	255V			
Nominal discharge current (8/20)	I_n	15kA	20kA	20kA	15kA
Max. discharge current (8/20)	I_{max}	40kA	50kA	50kA	40kA
Voltage protection level at I_n	U_p	〈800V	〈1.3kV	〈1.45kV	〈1.9kV
Response time	tA (L-N/N-PE)	〈25ns/100ns			
Temperature range		-40℃~+80℃			
Degree of protection		IP20			
Mounting		DIN rail 35 mm			

Dimension / Internal configuration

