MRX-100A

Camera Receiver Unit

장비개요 및 성능

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Description


○ 본 장비는 제어용 Key-Pad (Transmitter)와 연결하여 사용하는 장비로서 Aux 1, 2, 3 (AC220V), PAN/TILT, LENS 등의 동작을 제어하는 장치이다.

Features

○ Zero Cross 방식의 무접점 AC 출력과 통신방식은 RS-485/422 통신방식을 사용하며, 통신속도는 2400BPS, 4800BPS, 9600BPS이다.

○ 또한 소형 Case를 사용함으로써 설치가 용이하고 외관이 미려하다.

Panel Drawing

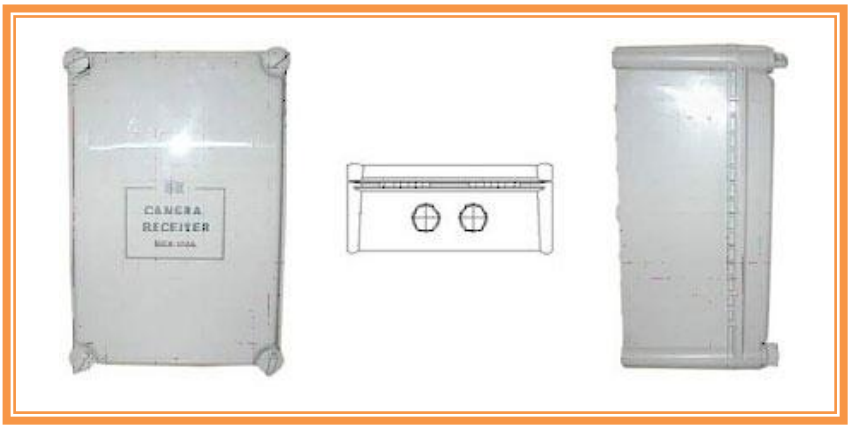

Specifications

○ General Part
- Communication method : key-pad(TX) : RS-485 / RS-422 (set up dip s/w)
- Communication speed : 8 bit, 1 stop bit, none parity / 2400, 4800, 9600 bps selector
- Connecting method : network

○ Control Part
- CPU : 8 Bit micro processor (ATMEL 89C51)
- Camera power : AC 110V/220V (220V setting upon packing)
- Pan/Tilt : AC 24V / AC 110V/220V (24V setting upon packing)
- Lens : DC ±6V / DC ±12V (±12V setting upon packing), zoom-in/out, focus-far/near, iris-open/close.
- Aux1, 2, 3 : AC 110V/220V (input power bypass supply)
- Recover tram : AC 24V(P/T), 8V, 15V (LOGIC)

○ Case & Power Part
- Power source : AC 110V/220V 60Hz
- Package : water / vibration proof box
- Dimensions : 173(W) * 270(H) * 125(D) mm

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217