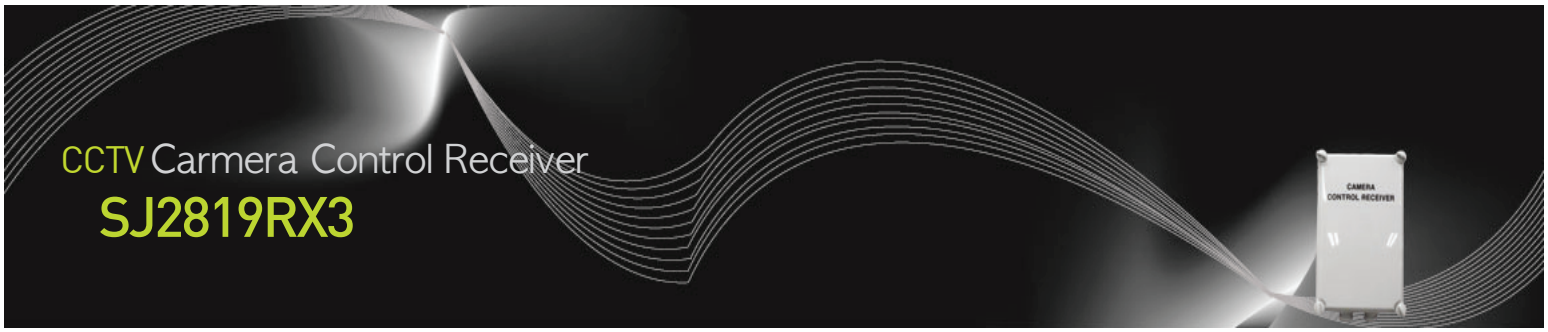

CCTV Remote Control Receiver

Specifications

	SJ48MPU
SIGNAL	
Input Interface	232C/Current Loop,422,485(Full/Half Duplex)
Output Interface	485
Baud Rate	4800,9600 Baud Rate
Protocl	Palco-P, Palco-D, Tech Win, Samsung, Honeywell,
	Sanyo, Bosch, Hitachi, East Unitech, party Brin, die, etc.
ENVIRONMENT	
Storage Temp	-40℃ ~ 80℃
Operating Temp	-20℃ ~ 70℃
Relative Humidity	0% ~ 90%
ELECTRICAL	
Voltage	AC90 ~ 240V
Power Consumption	15W or Less @220VAC
MECHANICAL	
Dimension(WxHxD)/Weight	185 x 316 x 154,3.6kg
Case Style,Color	ABS catapulting ,White



Dimensions

SJ2819RX3

■ FRONT VIEW

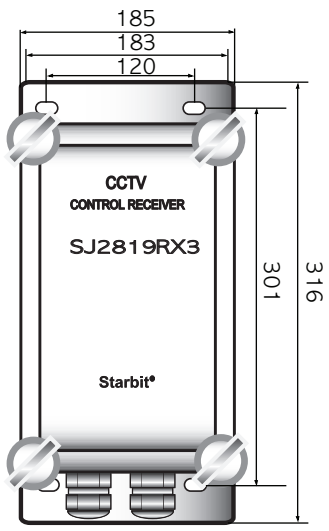

■ SIDE VIEW

