Powerking

www.powerkingmc.com

Excavator Mounted

SUPER WEDGE

NO VIBRATION !
NO NOISE !
ENJOY SAFETY & EFFICIENCY !


MSW-700 (Small Rotation type)


TSW-1100 (Rotation type)


SW-1100 (Fixed type)

Powerking Corporation

Powerking
www.powerkingmc.com

Excavator Mounted SUPER WEDGE


SW-1100 (Fixed type)



	SW-1100(Fixed Type)
Operating oil pressure	220 kg/cm²
Maximum power of cylinder	127 ton
Splitting power	2,400 ton
Splitting width	20 mm
Working one cycle time	40 sec
Overall weight	1,200 kg

TSW-1100 (Rotation type)

	TSW-1100 (Rotation Type)
Operating oil pressure	220 kg/cm²
Maximum power of cylinder	127 ton
Splitting power	2,400 ton
Splitting width	20 mm
Working one cycle time	40 sec
Overall weight	1,650 kg

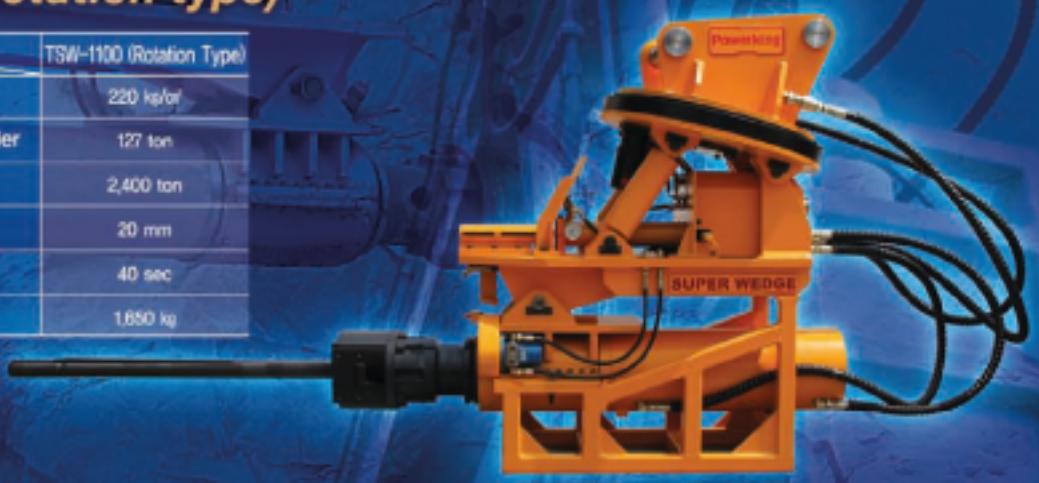

MSW-700 (Small Rotation type)



	MSW-700 (Small Rotation Type)
Operating oil pressure	220 kg/cm²
Maximum power of cylinder	60 ton
Splitting power	1,500 ton
Splitting width	15 mm
Working one cycle time	40 sec
Overall weight	580 kg

ISO 9001 ISO 14001

Powerking Corporation

Powerking

www.powerkingmc.com

Excavator Mounted SUPER WEDGE













- *Safer than blasting*
- *Powerful than Hyd. Breaker*
- *Minimizes noise*
- *Eliminates vibration & dust*





SMC JAS-ANZ CE

ISO 9001 ISO 14001

Powerking Corporation