

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

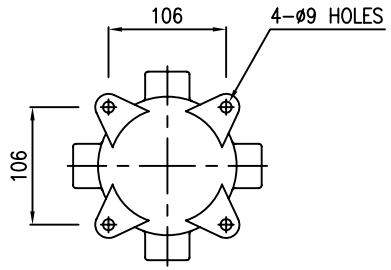

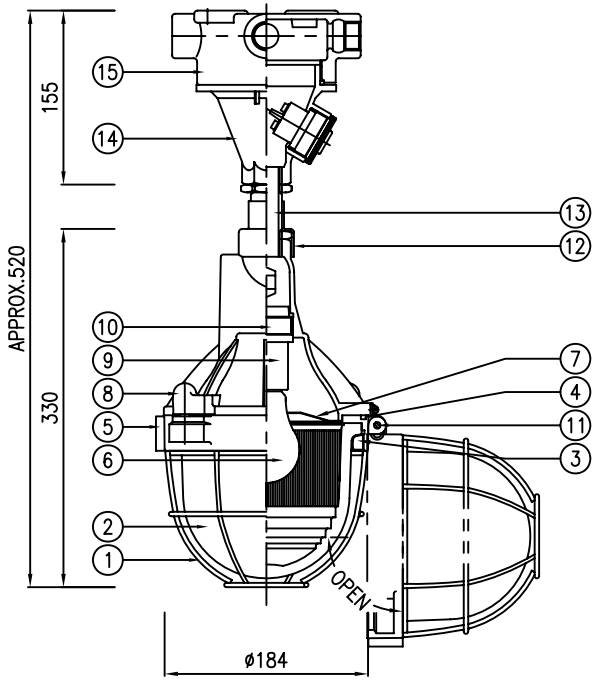

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	INCANDESCENT LAMP	☐ 100W	SET
		☐	

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE
1.


NO	PARTS	MATERIAL	REMARK
15	MOUNTING BOX	CAST ALUMINIUM ALLOY	
14	FLANGE	DIE CASTING ALUMINIUM	
13	NIPPLE	STEEL	
12	WEATHERPROOF CAP	SILICONE RUBBER	
11	HINGE PIN	ø5 STAINLESS STEEL ROD	SUS304
10	LAMP HOLDER MTG. PLATE	PHENOL RESIN	
9	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
8	BODY	DIE CASTING ALUMINIUM	
7	REFLECTOR	HIGH GRADE ALUMINIUM SHEET	
6	LAMP	INCANDESCENT LAMP	
5	GLOBE RING	DIE CASTING ALUMINIUM	
4	O RING GASKET	SILICONE RUBBER	
3	LOCK RING	DIE CASTING ALUMINIUM	
2	GLOBE	HEAT RESISTANT HARD GLASS	
1	GUARD	ø4 STAINLESS STEEL WIRE	SUS304

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	IL LTG. FIXTURE (CEILING MTG. TYPE)		APPLICATION AREA	
CAT NO.	EUL SERIES	CLASS OF PROTECTION	Ex d IIB T4	
COLOR FINISHING	MUNSELL NO. 7.5BG 6/1.5	DRAWING NO.	NB-ELH-D1-A01	

* LENGTH(L) ORDER MADE.

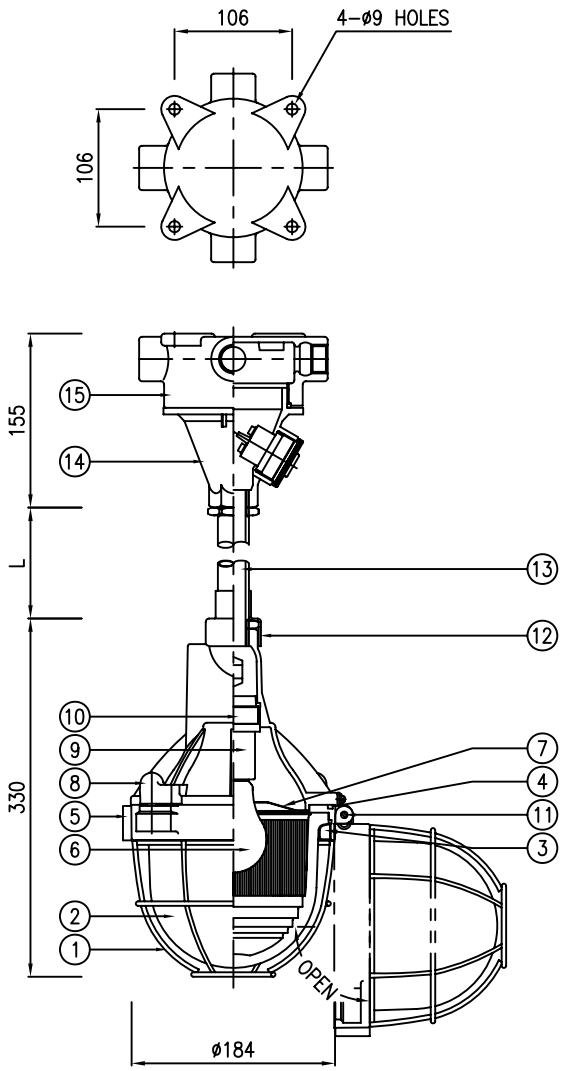

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	INCANDESCENT LAMP	☐ 100W	SET
		☐	

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE
1.

NO	PARTS	MATERIAL	REMARK
15	MOUNTING BOX	CAST ALUMINIUM ALLOY	
14	FLANGE	DIE CASTING ALUMINIUM	
13	SUSPENSION STEM	RIGID STEEL PIPE	
12	WEATHERPROOF CAP	SILICONE RUBBER	
11	HINGE PIN	ø5 STAINLESS STEEL ROD	SUS304
10	LAMP HOLDER MTG. PLATE	PHENOL RESIN	
9	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
8	BODY	DIE CASTING ALUMINIUM	
7	REFLECTOR	HIGH GRADE ALUMINIUM SHEET	
6	LAMP	INCANDESCENT LAMP	
5	GLOBE RING	DIE CASTING ALUMINIUM	
4	O RING GASKET	SILICONE RUBBER	
3	LOCK RING	DIE CASTING ALUMINIUM	
2	GLOBE	HEAT RESISTANT HARD GLASS	
1	GUARD	ø4 STAINLESS STEEL WIRE	SUS304

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	IL LTG. FIXTURE (PENDANT MTG. TYPE)	APPLICATION AREA	
CAT NO.	EUL SERIES	CLASS OF PROTECTION	Ex d IIB T4
COLOR FINISHING	MUNSELL NO. 7.5BG 6/1.5	DRAWING NO.	NB-ELH-D1-A01


REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	INCANDESCENT LAMP	☐ 100W	SET
		☐	

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

HUB SCHEDULE		
	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

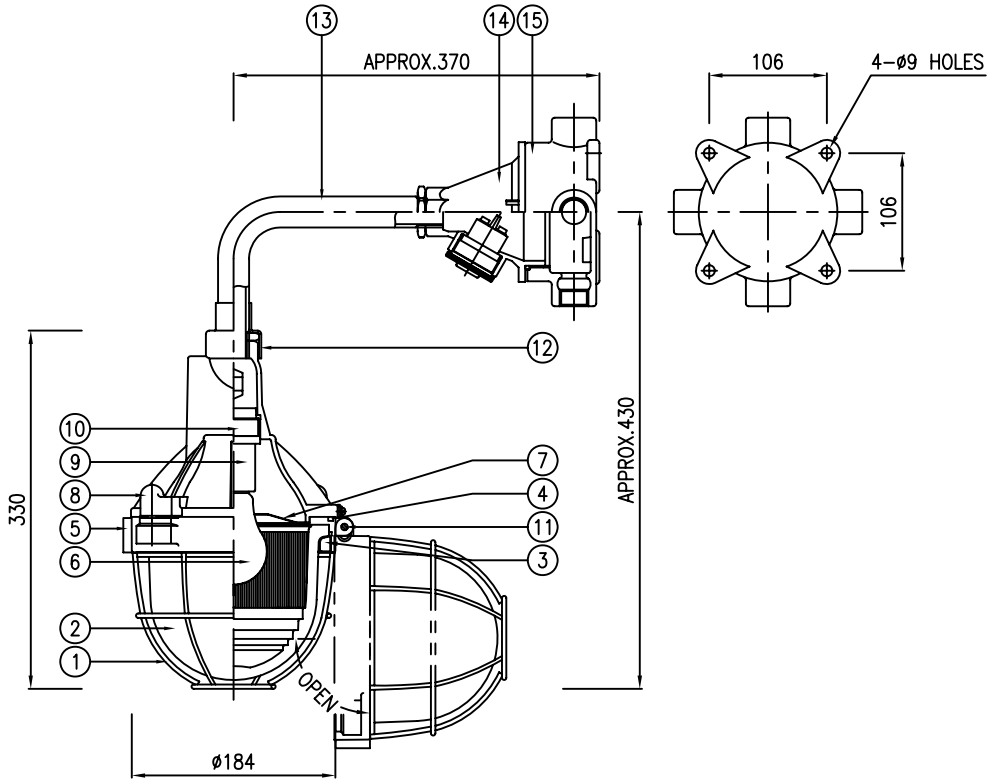

NOTE
1.

NO	PARTS	MATERIAL	REMARK
15	MOUNTING BOX	CAST ALUMINIUM ALLOY	
14	FLANGE	DIE CASTING ALUMINIUM	
13	SUSPENSION STEM	RIGID STEEL PIPE	
12	WEATHERPROOF CAP	SILICONE RUBBER	
11	HINGE PIN	ø5 STAINLESS STEEL ROD	SUS304
10	LAMP HOLDER MTG. PLATE	PHENOL RESIN	
9	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
8	BODY	DIE CASTING ALUMINIUM	
7	REFLECTOR	HIGH GRADE ALUMINIUM SHEET	
6	LAMP	INCANDESCENT LAMP	
5	GLOBE RING	DIE CASTING ALUMINIUM	
4	O RING GASKET	SILICONE RUBBER	
3	LOCK RING	DIE CASTING ALUMINIUM	
2	GLOBE	HEAT RESISTANT HARD GLASS	
1	GUARD	ø4 STAINLESS STEEL WIRE	SUS304


TYPE "_"

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	


南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	IL LTG. FIXTURE (BRACKET MTG. TYPE)		APPLICATION AREA	
CAT NO.	EUL SERIES	CLASS OF PROTECTION	Ex d IIB T4	
COLOR FINISHING	MUNSELL NO. 7.5BG 6/1.5	DRAWING NO.	NB-ELH-D1-A01	

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					



VIEW A-A'

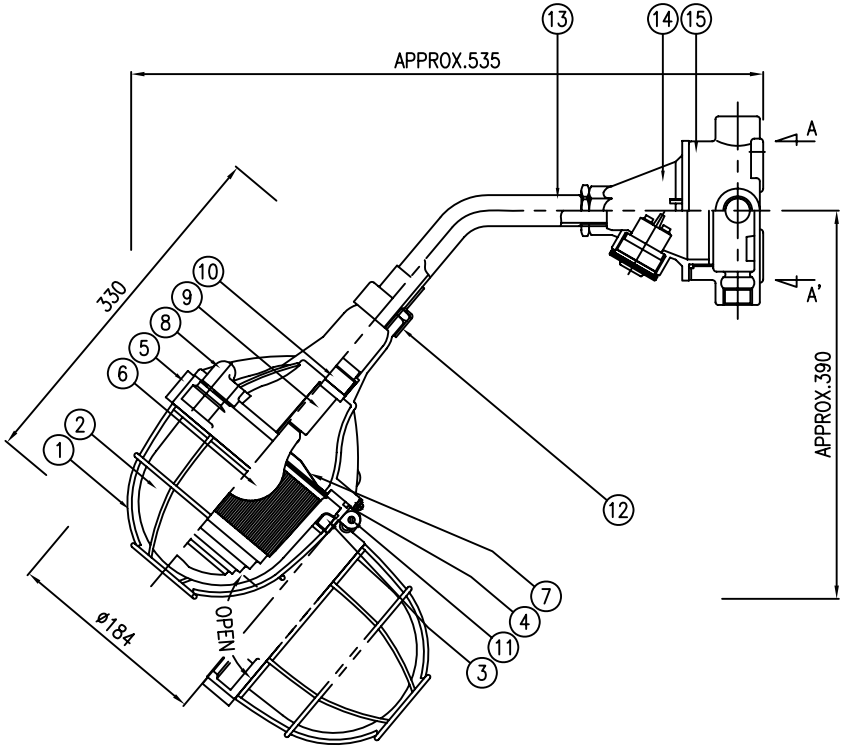

TYPE "_"

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	INCANDESCENT LAMP	☐ 100W	SET
		☐	

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V	FREQUENCY	☐ 50Hz ☐ 60Hz

HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐
	SIZE	☐ 3/4" ☐ 1" ☐ M ☐
	LOCATION	1 / 2 / 3 / 4 ☐ 1-2 ☐ 1-3 ☐ 1-2-3 ☐ 1-2-3-4
		☐ W/2-BLIND PLUGS ☐ NONE

NOTE
1.


NO	PARTS	MATERIAL	REMARK
15	MOUNTING BOX	CAST ALUMINIUM ALLOY	
14	FLANGE	DIE CASTING ALUMINIUM	
13	SUSPENSION STEM	RIGID STEEL PIPE	
12	WEATHERPROOF CAP	SILICONE RUBBER	
11	HINGE PIN	ø5 STAINLESS STEEL ROD	SUS304
10	LAMP HOLDER MTG. PLATE	PHENOL RESIN	
9	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
8	BODY	DIE CASTING ALUMINIUM	
7	REFLECTOR	HIGH GRADE ALUMINIUM SHEET	
6	LAMP	INCANDESCENT LAMP	
5	GLOBE RING	DIE CASTING ALUMINIUM	
4	O RING GASKET	SILICONE RUBBER	
3	LOCK RING	DIE CASTING ALUMINIUM	
2	GLOBE	HEAT RESISTANT HARD GLASS	
1	GUARD	ø4 STAINLESS STEEL WIRE	SUS304

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	IL LTG. FIXTURE (40° BRACKET MTG. TYPE)	APPLICATION AREA	
CAT NO.	EUL SERIES	CLASS OF PROTECTION	Ex d IIB T4
COLOR FINISHING	MUNSELL NO. 7.5BG 6/1.5	DRAWING NO.	NB-ELH-D1-A01

* LENGTH(L) ORDER MADE.

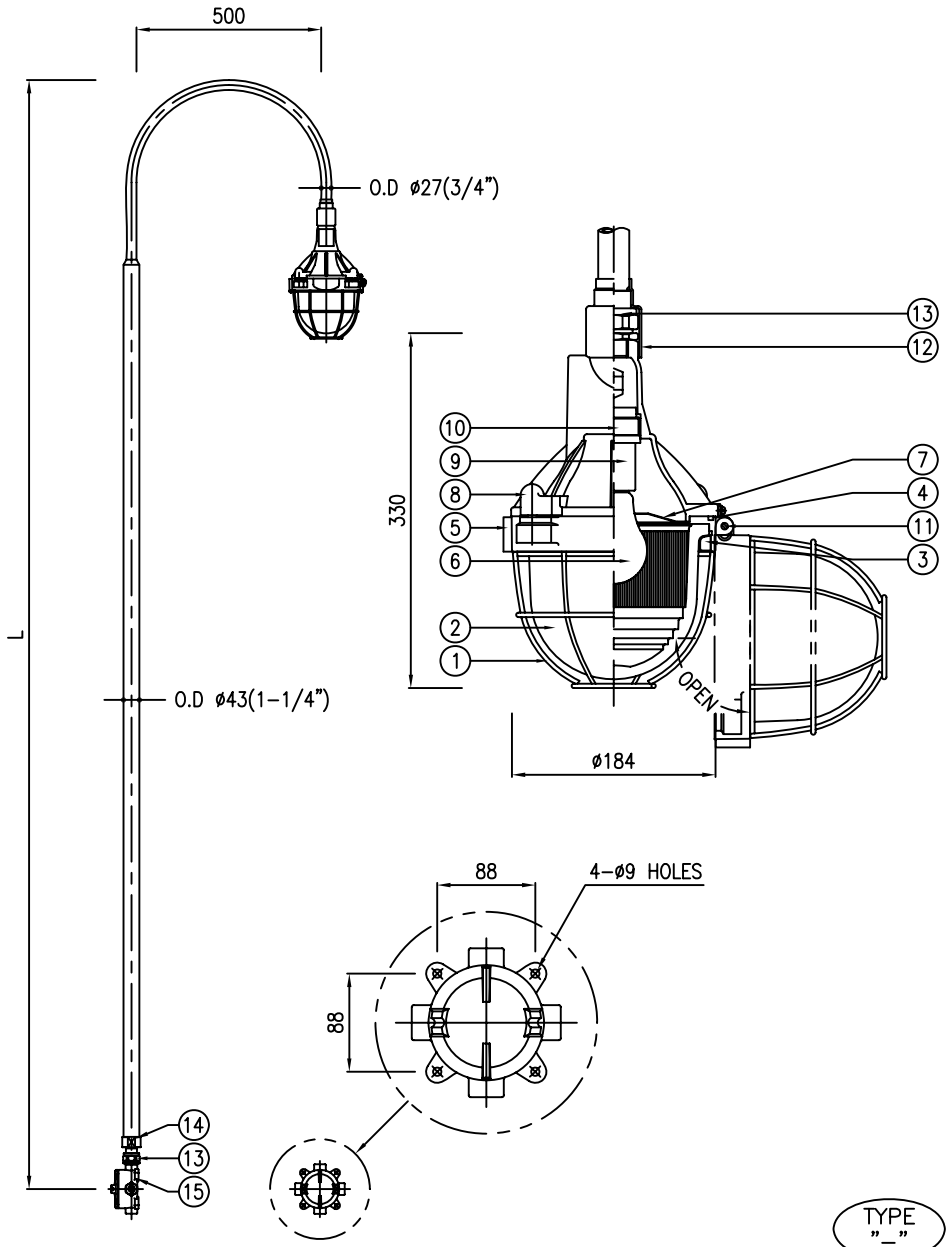

TYPE "_"

REV.NO.	DATE	DESCRIPTION	REV'D BY	CHE'D BY	APP'D BY
△					
△					
△					

SELECTION TABLE

ITEM NO.	LAMP	LAMP SIZE	Q'TY
	INCANDESCENT LAMP	☐ 100W	SET
		☐	

SUPPLY VOLTAGE	☐ DC110V ☐ AC220V ☐ AC110V ☐ AC240V		FREQUENCY	☐ 50Hz ☐ 60Hz	
HUB SCHEDULE	THREAD	☐ NPT ☐ PF ☐ MM ☐			
	SIZE	☐ 3/4" ☐ 1" ☐ M ☐			
	LOCATION	POLE 1 2 3	☐ P-1 ☐ P-2 ☐ P-1-2 ☐ P-1-2-3		
		☐ W/2-BLIND PLUGS	☐ NONE		

NOTE
1.

NO	PARTS	MATERIAL	REMARK
15	MOUNTING BOX	CAST IRON	
14	SOCKET	CARBON STEEL	
13	UNION COUPLING	CARBON STEEL	
12	WEATHERPROOF CAP	SILICONE RUBBER	
11	HINGE PIN	ø5 STAINLESS STEEL ROD	SUS304
10	LAMP HOLDER MTG. PLATE	PHENOL RESIN	
9	LAMP HOLDER	PORCELAIN W/MEDIUM SOCKET	E26
8	BODY	DIE CASTING ALUMINIUM	
7	REFLECTOR	HIGH GRADE ALUMINIUM SHEET	
6	LAMP	INCANDESCENT LAMP	
5	GLOBE RING	DIE CASTING ALUMINIUM	
4	O RING GASKET	SILICONE RUBBER	
3	LOCK RING	DIE CASTING ALUMINIUM	
2	GLOBE	HEAT RESISTANT HARD GLASS	
1	GUARD	ø4 STAINLESS STEEL WIRE	SUS304

SCALE	N.S	APPROVED BY	
UNIT	mm	CHECKED BY	
DATE		DRAWN BY	

南北電氣株式會社
NAMBUK ELECTRIC CO.,LTD

TITLE	IL LTG. FIXTURE (HAND RAIL TYPE)	APPLICATION AREA	
CAT NO.	EUL SERIES	CLASS OF PROTECTION	Ex d IIB T4
COLOR FINISHING	LTG. FIXTURE : MUNSELL NO. 7.5BG 6/1.5 POLE : HOT DIP GALVANIZED	DRAWING NO.	NB-ELH-D1-A01