MVUT-100

Video UTP Transmitter

장비개요 및 성능

Description

○ 본 장비는 Composite Video 입력을 UTP (Unshielded Twisted Pair) Cable로 최대 1000M를 전송하는 Video Transmitter 제품이다.

Features

○ Video 입력은 NTSC/PAL을 지원하며 UTP Cable은 CATEGORY 5, 5E, 6을 사용할 수 있으며, MVUT-100에 입력된 Video Signal은 전용 수신기인 MVRU-100에 UTP Cable로 Point-to-Point 접속되어야 Video Signal로 출력하여 준다.

○ MVUT-100은 MVUR-100에서 공급하는 AC 12V의 Power를 UTP Cable을 통하여 공급받으며, 또는 별도의 어댑터를 사용할 수 있다. 또한 AUX 단자를 이용하여 Camera Pan/Tilt 제어용 신호와 언밸런스 오디오 신호를 선택하여 전송할 수 있다.

Panel Drawing



Specifications

○ General Part

- Input : 1 Vp-p Composite Video, 75Ω, NTSC/PAL, BNC Connector
- Output : Balanced Differential Signal, 100Ω, RJ-45
- Cable : Unshielded Twisted Category 5, 5e, 6 AWG24-4P
- Internal Operation Frequency : 130MHz, -3dB
- Internal Distortion : 60dB@5MHz
- Differential Phase Error : 0.04 Degree NTSC, 150Ω
- Operating Temperature Range : -40℃ ~ +85℃
- Internal Power Dissipation : Max 600mW
- Humidity Range : 0% ~ 90%

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia +65 81335582 Fax. +65 67828910
China +86 021 54249750 Fax. +86 021 54240199
Singapore +65 81335582 Fax. +65 67828910
Korea +82 2 2026 1200 Fax. +82 2 2026 1217

MVUT-100


Video UTP Transmitter

장비개요 및 성능

Specifications

○ Case Part

- Weight : 200g
- Dimensions : 68(W) * 78(H) * 25(D) mm

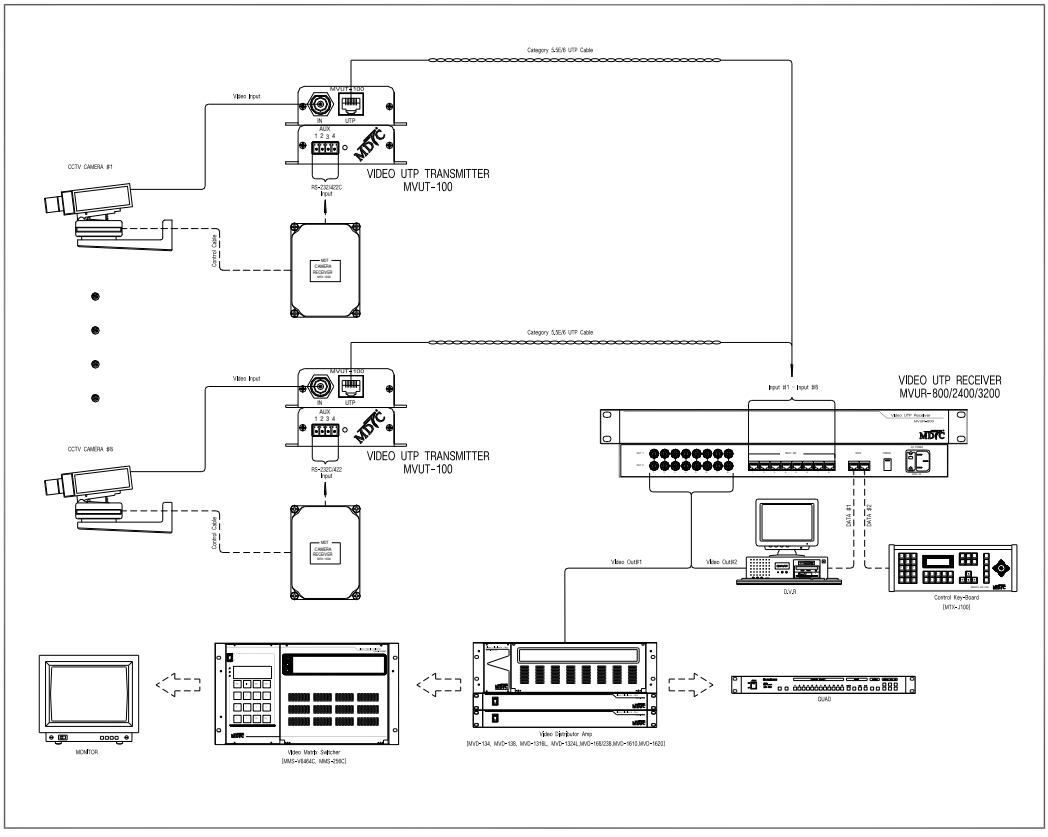

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217