MRMS-2401D

RGB Selector Switcher

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Description

○ It allows 24 RGB input signals with R.G.B.HD.VD. to be switched to one compatible display device.

Features

○ Built-in Control Switch is in front of the equipment. This built-in communication port enables external communication device such as operation system and interface control.

○ D-sub Connector at input/output terminal makes operation easy.

○ The front LED panel enables easy view of inputs and outputs. Memory Back-up function helps to save and reconnect the last status while it is turned off.

○ Received lamp output & interface from the rear panel, it enables to fix 24 selective switches separately and control them individually. (Option)

Panel Drawing



Specifications

○ Video Part

- Input/Output number : 24 x 1
- Input/Output type : RGBHV
- Input/Output connector : d-sub 15pin
- Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
- Input/Output impedance : 75Ohm ± 1%
- Bandwidth : 600 MHz (-3 dB), fully loaded

MAX **Max Digital Tech Co.,Ltd**

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MRMS-2401D

RGB Selector Switcher

Equipment Overview & Function

Specifications

○ Remote Control Part

- Serial control : 1 RS-232, D-sub 9pin connector
- Lamp out : +12V
- Remote input : dry Contact

○ Case & Power Part

- Power source : AC 85 ~ 240V, 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 40Watt
- Type : 19" rack type
- Dimensions : 483(W) * 133.5(H) * 300(D) mm

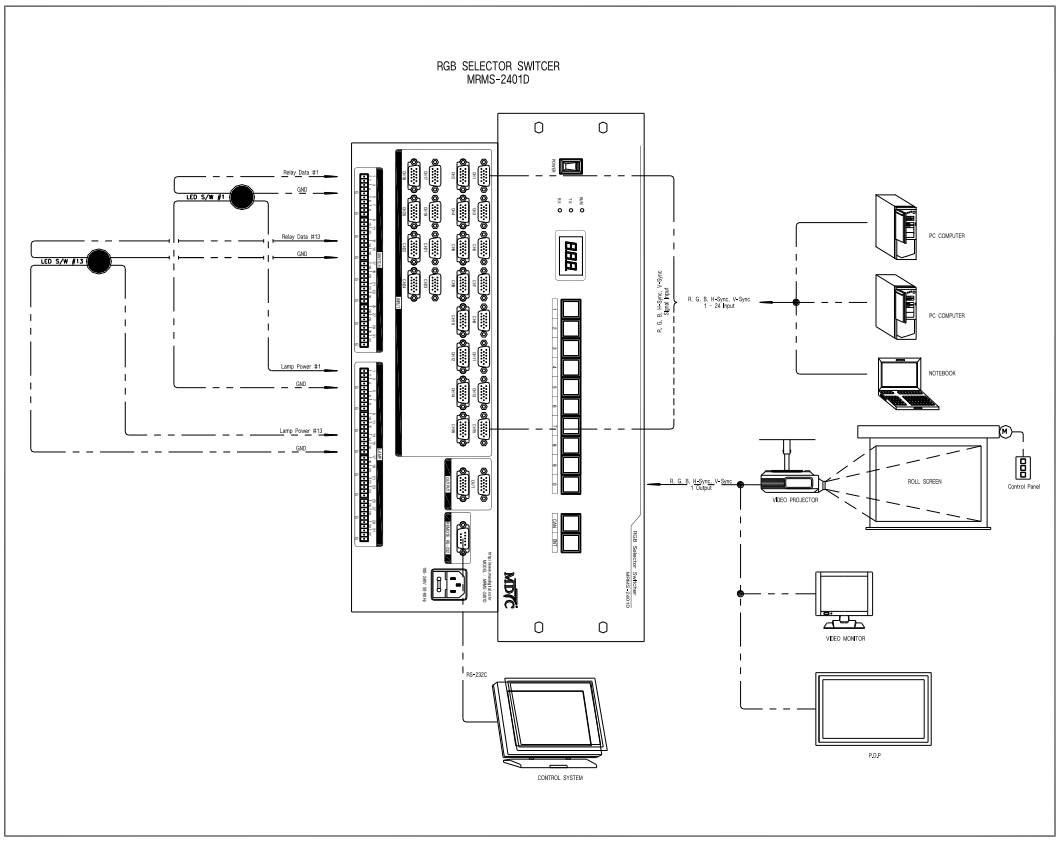

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217