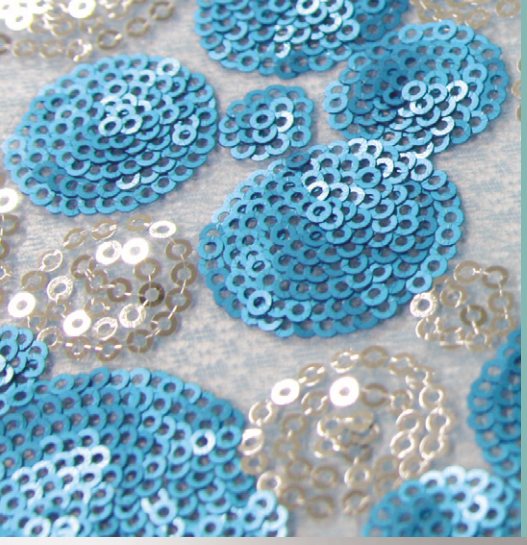

SB SMALL SERIES

High-speed, small-heads automatic embroidery machines

Suit your needs

for your flexible business



SUNSTAR CO., LTD.

Head office #178-67, GAJWA-DONG, SEO-GU, INCHEON, KOREA
tel +82(0)32-580-5980~93 fax +82(0)32-579-8350~51 **www.swfkorea.com**

For W24H service
www.sunstarcs.com

SB SMALL SERIES

High-speed, small-heads automatic embroidery machines

SWF	/	SB	-	W	D	9	08	-	55

- Series
- M/C Type
- Head Interval
- Y-Stroke
- No. of Heads
- No. of Colors

Specifications

Speed		Max. 1,200 rpm
Stitching Length		0.1 ~ 12.7 mm
Motor	Main	Servo Motor x 1
	X-Y	Servo Motor x 2
Electricity		1-Phase 200V, 220V, 240V [50/60Hz]
Power Consumption		1.9 kW
Bobbin Winder		Standard
Upper Thread Holding Unit		Standard
Lubrication System		Auto Lubrication System
Operation Box		Standard : Color LCD Screen
Hook		Standard Hook
Memory Capacity		Standard : 4,000,000 stitches
Memory Media		USB Memory Stick
Safety Device		Standard : Emergency Stop, Error Code Message
Optional Device		SQ30/SQ31D, SQ35, SQ41i, ZD20, Cording, Boring

Division of Model

Model	Head Interval [mm]	Color	Head	Y-Stroke [mm]	Alternative	Emb. Space [mm]		Machine Size [mm]		
						Each Head	All Head	Length	Width	Height
SB-WD904-55	300	9	4	550	non alternative	300 x 550	1,200 x 550	2,407	1,559	1,560
SB-WD(X)904-75	300(600)	9	4	750	alternative	300(600) x 750	1,200 x 750	3,007	1,959	1,560
SB-WD906-55	300	9	6	550	non alternative	300 x 550	1,800 x 550	3,875	1,559	1,560
SB-WD908-55	300	9	8	550	non alternative	300 x 550	2,400 x 550	3,595	1,559	1,560
SB-WD(X)908-65	300(600)	9	8	650	alternative	300(600) x 650	2,400 x 650	3,895	1,750	1,560
SB-WD(X)908-75	300(600)	9	8	750	alternative	300(600) x 750	2,400 x 750	3,895	1,959	1,560
SB-WE(X)904-120	330(660)	9	4	1,200	alternative	330(660) x 1,200	1,320 x 1,200	3,216	2,849	1,560
SB-WE906-55	330	9	6	550	non alternative	330 x 550	1,980 x 550	3,197	1,559	1,560
SB-WE1206-55	330	12	6	550	non alternative	330 x 550	1,980 x 550	3,197	1,559	1,560
SB-WE(X)1206-100	330(660)	12	6	1,000	alternative	330(660) x 1,000	1,980 x 1,000	3,602	2,498	1,560
SB-WE908-55	330	9	8	550	non alternative	330 x 550	2,640 x 550	3,857	1,559	1,560
SB-WE908-65	330	9	8	650	non alternative	330 x 650	2,640 x 650	3,857	1,750	1,560
SB-WE(X)1208-100	330(660)	12	8	1,000	alternative	330(660) x 1,000	2,640 x 1,000	4,262	2,498	1,560
SB-WH908-55	400	9	8	550	non alternative	400 x 550	3,200 x 550	4,487	1,559	1,560
SB-WJ(X)1206-100	450(900)	12	6	1,000	alternative	450(900) x 1,000	2,700 x 1,000	4,507	2,498	1,560
SB-WJ(X)1206-120	450(900)	12	6	1,200	alternative	450(900) x 1,200	2,700 x 1,200	4,507	2,849	1,560
SB-WK1204-55	500	12	4	550	non alternative	500 x 550	2,000 x 550	3,388	1,559	1,560

We can make some modifications for improvement without previous notice.

Optional Device

Zigzag Cording [ZD20]



Individual Sequin [SQ41i]

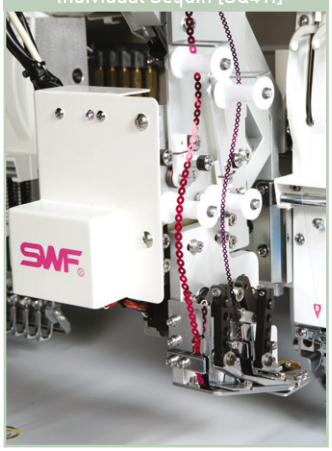

SQ30/31D

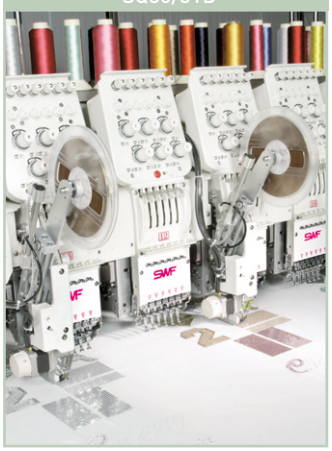

Cording



Boring

