
DESKTOP LABEL PRINTER

LK-B425

Compact and Lightweight Printer that Handles Large Number of Labels!



Key Features

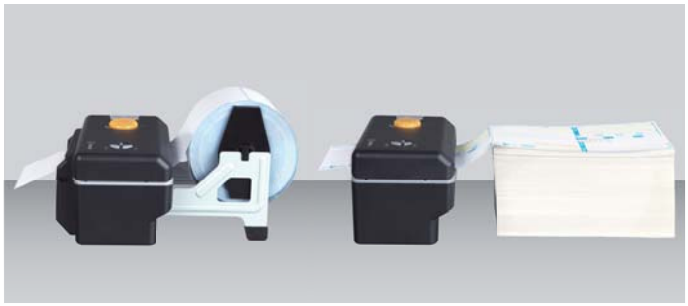

Flexible handling of various types of media

- Thermal Fanfold Label
- Thermal Roll Label



Enhanced user convenience with Jog Dial for Density Adjustment

Unique function which you can adjust printing density without access to a computer.

5 LEVELS	LOW	HIGH
	ABCD	**ABCD**

LOGISTIC WAREHOUSE POST OFFICE TICKETING MARKET AIRPORT HOSPITAL

ITEM		TYPE
MODEL		LK-B425
PRINTING	METHOD	Direct Thermal
	SPEED	127mm / sec.
	PRINT WIDTH	104mm (4-inch)
	PRINT LENGTH	1,000mm
	RESOLUTION	203DPI
BARCODE	1D	Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB
	2D	MaxiCode, PDF417, DataMatrix, QR code, MicroPDF417, AZTEC
PAPER	TYPE	Roll, Fanfold
	WIDTH	Min. 25mm ~ Max. 114mm
INTERFACE	STANDARD	USB + Serial + Ethernet
	OPTION	Wi-Fi, Bluetooth
SYSTEM	CPU	Cortex-M4(ARM 32bit Core) STM32F427ZG
	MEMORY	Flash 1MB(in CPU), SDRAM 16MB, Serial Flash 8MB, EEPROM 2KB
SENSOR	STANDARD	Gap, Cover Open, Black Mark
POWER	TYPE	External Power Adapter
	AC	100~240V AC, 1.5A, 50~60Hz
	DC	24V, 1.75A
APPEARANCE	DIMENSION (W x D x H)	182 x 120 x 123 mm
	WEIGHT	1.5 kg
OPTION		External Paper Supply, Auto Cutter

Type

FANFOLD TYPE



STANDARD TYPE



ROLL TYPE



AUTO CUTTER TYPE



J. STEPHEN Lab., Ltd.
28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do, 447-210 Republic of Korea
TEL. +82-31-8077-5000 FAX. +82-31-459-8880 E-Mail : sales@miniprinter.com
www.miniprinter.com