Two Door Clean Bench

양문형 무균작업대 (ON/OFF, Vertical type, 안전형)

- 식물조직배양, 제약, 의학, 농업, 식품, 신소재, 전자산업등 반도체산업에서 청정작업을 요하는 실험에 사용되는 장비
- Two Door type 서로 마주보고 작업할 수 있는 형태로 대량작업과 연속작업에 편리하며 작업능률 향상
- 인체에 유해한 물질 실험 및 취급시 사용 – 유해균, 유해물질 취급시 사용자의 안전을 위하여 오염된 공기를 차단하는 구조
- Vertical type – 청정공기가 천장에서 수직방향으로 흐르는 방식
- 유해균, 유해물질 취급시 사용자의 안전을 위하여 오염된 공기를 차단하는 구조
- Sliding door 높낮이를 사용자가 임의대로 조절할 수 있으며 사용후 먼지 및 불순물로 부터 작업대 보호.

DS-70D



Oppositely air flow

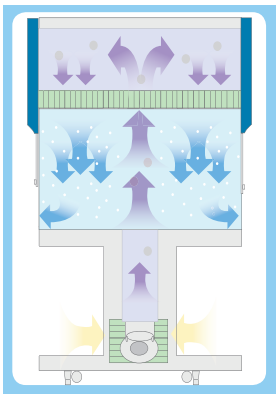

DS-70MDS3



ON/OFF switch type

		DS-71D	DS-70D	DS - 70D3	DS - 71DS	DS - 70DS	DS - 70DS3
Type		Opposite vertical air flow type			Opposite Bio-hazard safety air flow type		
Main controller		ON / OFF switch type					
Dimensions (WxDxH)mm	In	760 x 860 x 720	1200 x 860 x 720	1500 x 860 x 720	760 x 860 x 720	1200 x 860 x 720	1500 x 860 x 720
	Out	1000 x 890 x 1790	1470 x 890 x 1790	1770 x 890 x 1790	1000 x 890 x 1790	1470 x 890 x 1790	1770 x 890 x 1790
Main filter		Hepa filter / 0.3micron 99.99% efficiency					
Winding velocity		High/Low switch					
Flow type		100% Exhaust			70% Recirculation ,30% Exhaust		
Illumination lamp		Fluor 20W x 2sets	Fluor 40W x 2sets		Fluor 20W x 2sets	Fluor 40W x 2sets	
UVG lamp		20W x 2sets	40W x 2sets		20W x 2sets	40W x 2sets	
U.V control		ON/OFF switch					
Purity		Lower than class 100					
Utility		Vacuum cock, Gas cock, Special consent box(220V)					
Power(AC220V, 60Hz)		0.4Kw	0.5Kw	0.7Kw	0.4Kw	0.5Kw	0.7Kw

Program type

	DS-71MD	DS-70MD	DS - 70MD3	DS - 71MDS	DS - 70MDS	DS - 70MDS3
Type	Opposite microprogram vertical air flow type			Opposite microprogram bio-hazard safety air flow type		
Main controller	Full microprogram LCD displayed preengage time auto controller					
Winding velocity	High/Low switch					
Flow type	100% Exhaust			70% Recirculation ,30% Exhaust		
U.V control	Auto time controlled. 99hr.59min. or hold / UVG preengage time auto controller / UVG 40W x 2sets.					