SJS/A-PS/A

Direct drive, automatic jeans pocket setter

For W24H service
www.swf-service.com

SJS / A - PS / A

SJS / A – PS / A

SJS	Application	Stacker	
SunStar jean series	Pocket setter	A	Auto.
		B	Non-auto.

⊙ Specification

Model		SJS/A-PS/A
Application		Jean (Pocket)
Max. sewing speed [spm]		3,600
Stitch length [mm]		0.1~6
Lift of the presser foot [mm]	Auto	20
Needle bar stroke [mm]		34.6
Sewing area [mm]	X	250
	Y	250
No. of input patterns		691
Needle		DPx17 #20 (#18~22)
Hook	Drive type	Rotary
	Position	Vertical
	Capacity	x2
Lubrication		Auto
Thread roll		○
Auto thread trimming		○
Feeding system		Servo motor
Motor		Servo motor

Specifications and appearance of products are subject to change without notice for the performance improvement.

OVERSEAS MARKETING DIVISION

SUNSTAR CO., LTD.

#178-212, Gajwa-dong, Seo-gu, Incheon, Korea
tel: 82-32-580-5600 fax: 82-32-584-3020

OVERSEAS NETWORK

| SUNSTAR U.S.A. INC |
tel: 1-305-591-9596 fax: 1-305-591-0661

| SUNSTAR DO BRASIL LTDA |
tel: 55-11-3362-3434 fax: 55-11-3362-3444

| SUNSTAR MACHINERY EUROPE GMBH |
tel: 43-2236-660-229 fax: 43-2236-660-2293

| SUNSTAR BELARUS OFFICE |
tel: 375-17-237-1834

| SUNSTAR MACHINERY SINGAPORE PTE LTD. |
tel: 65-6227-7545 fax: 65-6227-7905

| SUNSTAR BANGALORE BRANCH OFFICE |
tel: 91-80-2653-0365~6 fax: 91-80-2653-0367

OVERSEAS NETWORK

| SUNSTAR DELHI BRANCH OFFICE |
tel: 91-120-4560057~8 fax: 91-120-4560059

| SUNSTAR DHAKA BRANCH OFFICE |
tel: 88-02-881-9153 fax: 88-02-883-5707

| SUNSTAR CHITTAGONG BRANCH OFFICE |
tel: 88-031-255-2497 fax: 88-031-255-2497

| SUNSTAR JAKARTA BRANCH OFFICE |
tel: 62-21-4586-5839 fax: 62-21-4586-5840

| SUNSTAR HOCHIMINH BRANCH OFFICE |
tel: 84-8-3592-3703 fax: 84-8-3592-3704

| SUNSTAR HANOI BRANCH OFFICE |
tel: 84-4-2210-0560 fax: 84-4-6282-2433

| SUNSTAR MACHINERY SHANGHAI CO.,LTD |
tel: 86-21-6957-6308~6312 fax: 86-21-6957-6092

| SUNSTAR MACHINERY SHANGHAI CO.,LTD |
tel: 86-21-6353-2233 fax: 86-21-6353-8640

| SUNSTAR QINGDAO BRANCH OFFICE |
tel: 86-532-6691-1991 fax: 86-532-6691-2262

| SUNSTAR NANJING BRANCH OFFICE |
tel: 86-25-8459-4758 fax: 86-25-8459-4408

| SUNSTAR HANGZHOU BRANCH OFFICE |
tel: 86-571-8577-9477 fax: 86-571-8577-9478

| SUNSTAR DONGGUAN BRANCH OFFICE |
tel: 86-769-2249-1610 fax:86-769-2234-4042

| SUNSTAR ZHENGZHOU BRANCH OFFICE |
tel: 86-371-8606-8393 fax: 86-371-8606-8393

| SUNSTAR TIANJIN BRANCH OFFICE |
tel: 86-22-6089-1737 fax: 86-22-6089-1737

| SUNSTAR SHISHI BRANCH OFFICE |
tel: 86-595-8858-881 fax: 86-595-8855-7874

| SUNSTAR CHENHDU BRANCH OFFICE |
tel: 86-28-8311-7620 fax: 86-28-8312-7620

| SUNSTAR NANNING BRANCH OFFICE |
tel: 86-771-386-6432 fax: 86-771-386-7432

| SUNSTAR NANCHANG BRANCH OFFICE |
tel: 86-791-384-9667 fax: 86-791-384-9663

| SUNSTAR SHENYANG BRANCH OFFICE |
tel: 86-24-2366-3268 fax: 86-24-2366-3268

| SUNSTAR HEFEI BRANCH OFFICE |
tel: 86-551-424-8000 fax: 86-551-424-8000

| SUNSTAR WUHAN BRANCH OFFICE |
tel: 86-27-8375-3080 fax: 86-27-8375-0371

WEB - SITE
www.sunstar.co.kr

E - MAIL
marketing@sunstar.co.kr

SunStar SunStar CO., LTD.

CE

Registered ISO 9001:2000 UKAS QUALITY MANAGEMENT 127-A

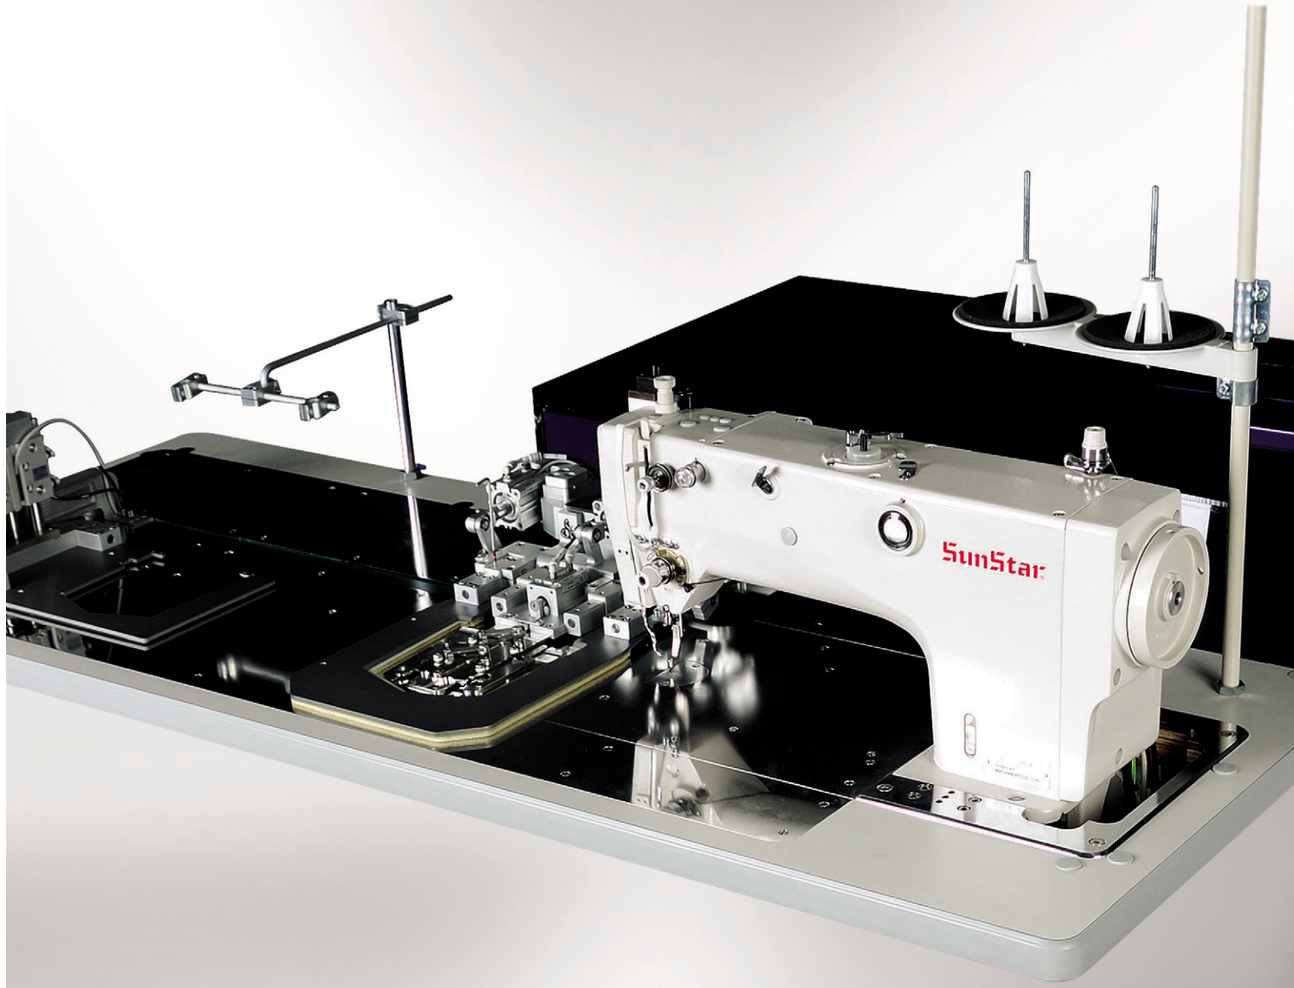

SJS/A-PS/A

Direct drive, automatic jeans pocket setter

SunStar

SJS/A-PS/A

Direct drive, automatic jeans pocket setter

FEATURE

01



X-Y driving part cover

The X-Y driving part has the cover which can be turned on or off. This has made maintenance activity easier.

02



Pneumatic adjustment of different presser foot height

Stable sewing is possible even thick material through the presser foot controlled by the pneumaticity.

03



Stable X-Y feed mechanism

- The powerful operation of the 1kw X-driving motor and the 750w Y-driving motor and the precise control of the servo motor have realized stable motion of the machine.
- The use of two belts for X feed has brought stability to operation.

04



Easy JIG replacement

- The simple JIG replacement increase the productivity enhancement.
- JIG replacement is not costly, so that production cost can be saved.
- The sewing material's skid is prevented with the strong pressing power of the JIG.

05



Possible to handle general pattern sewing

When converted into a pattern sewing machine, the maximum speed could be 2,700spm.

- The sewing area is 200X200.
- The application can be changed with thepattern JIG replacement only.

06



Higher safety

For user safety, the removable fence has been installed around the stacker to protect user from the pneumatically operated bar.

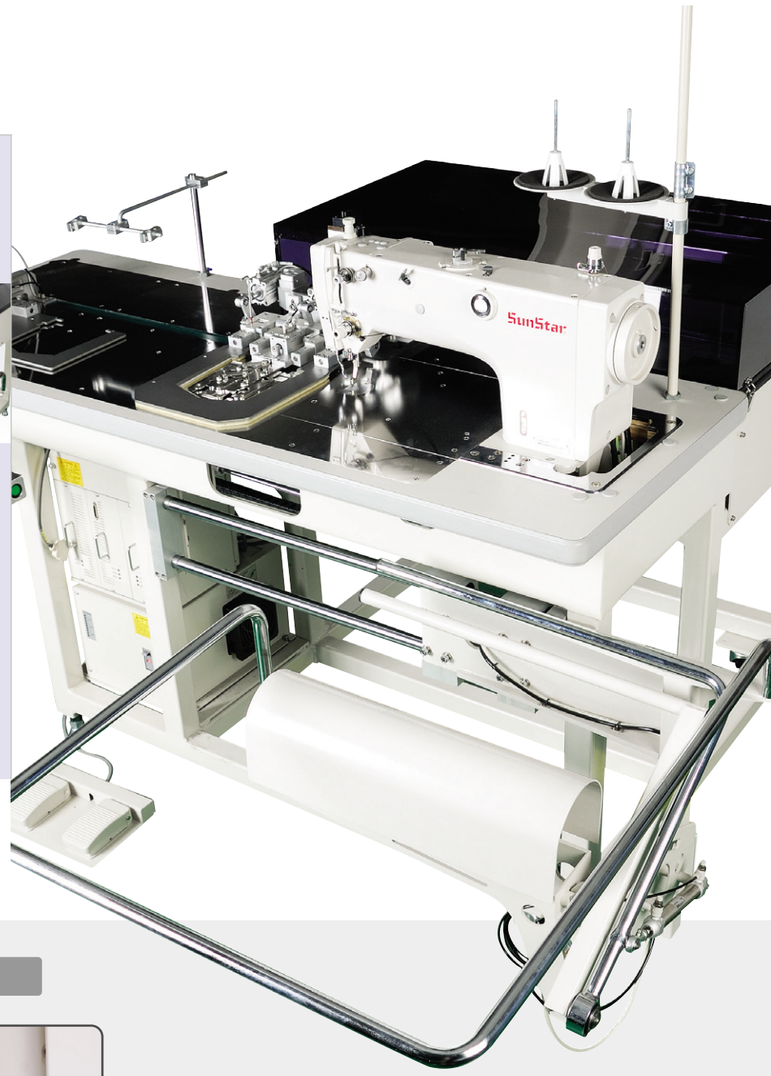

DIRECT DRIVE

▪ 500W AC servo motor and powerful handling for heavy materials

Compared with competitors, SunStar offers more stable motor installation structure(patent filing in progress).
3D CAD & CAE interpretation-based motor design has realized reduced noises and vibration. The accurate operation stop and smooth responsiveness of the machine has improved productivity.

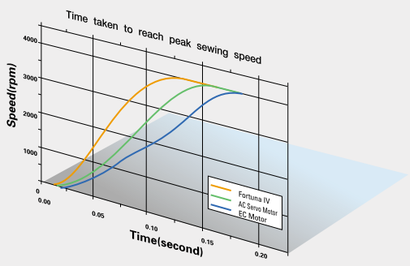

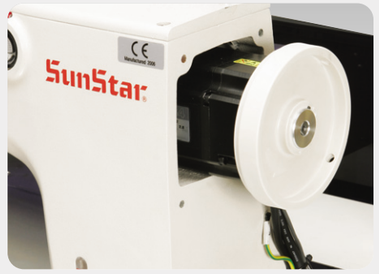

CONTROL BOX



- By lightening the control box, the working space under the table has been expanded.
- As a seamless rack type, fewer breakdowns occur, and maintenance becomes eaiser.
- When machine errors occur, the LED lamp blinks to help users easily pinpoint and check problematic areas.

