
Vented Tubular Stationery
OPzS Battery

Model	Voltage	10HR Capacity	Dimension (mm)				Weight (Kg)	
		(Ah) FV. 1.80V	L	W	H	TH	Dry	Wet
4-OPzS-200	2	200	103	206	354	409	13.2	17.2
5-OPzS-250		250	124	206	354	409	16.2	20.8
6-OPzS-300		300	145	206	354	409	19.2	24.3
5-OPzS-350		350	124	206	470	525	19.4	26.9
6-OPzS-420		420	145	206	470	525	23.4	31.5
7-OPzS-490		490	166	206	470	525	27.4	36.1
6-OPzS-600		600	145	206	645	700	33.9	44.8
8-OPzS-800		800	191	210	645	700	45.3	61.3
10-OPzS-1000		1000	233	210	645	700	55.5	74.6
12-OPzS-1200		1200	275	210	645	700	65.8	88.0
12-OPzS-1500		1500	275	210	795	850	87.0	114.3
16-OPzS-2000		2000	399	214	771	826	123	116
20-OPzS-2500		2500	487	212	771	826	152	204
24-OPzS-3000		3000	576	212	771	826	179	242


Relation curve between discharge depth and cycle service life

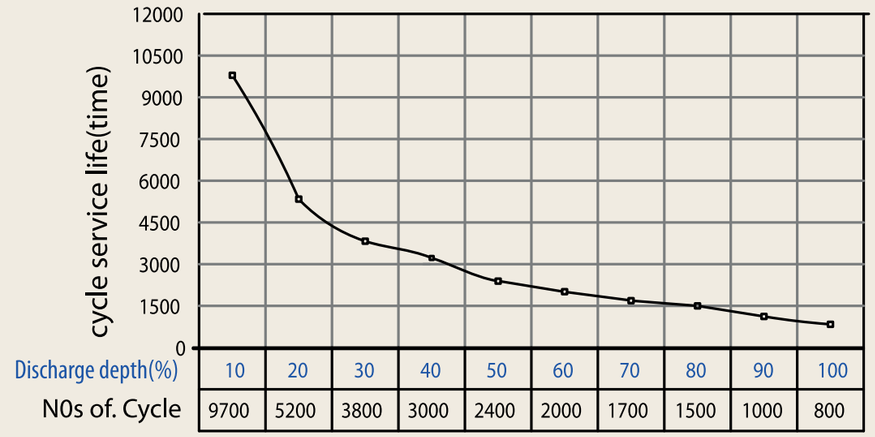

This battery is tubular type in which the active material is packed into parallel microporous tubes containing a central lead-antimony alloy spine.
This construction gives high active material efficiency and long cycle life.

APPLICATION

- TELECOM STATION
- WIND & SOLAR POWER STATION
- POWER STATION, SUB STATION, NUCLEAR POWER PLANT
- LIGHTHOUSE, RAILWAY STATION

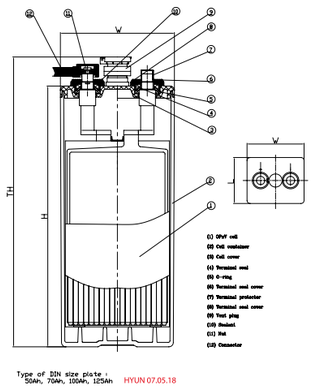



ADDRESS: A 701-1 Digital Empire, 387 Simin-Daero, Dongan-Gu, Anyang-Si, Gyeonggi-Do, Korea #431- 804 TEL: (+82-31) 8086-7610/1 FAX: (+82-31) 8086-7612 E-Mail:ukb@ukbkorea.com Homepage: www.ukbkorea.com

Vented Tubular Stationery
OPzS Battery

UKB Co.,Ltd.
Unikor Battery co., ltd.

