
SINCE 1991

Automatic Cutting Machine Series


KM-3300

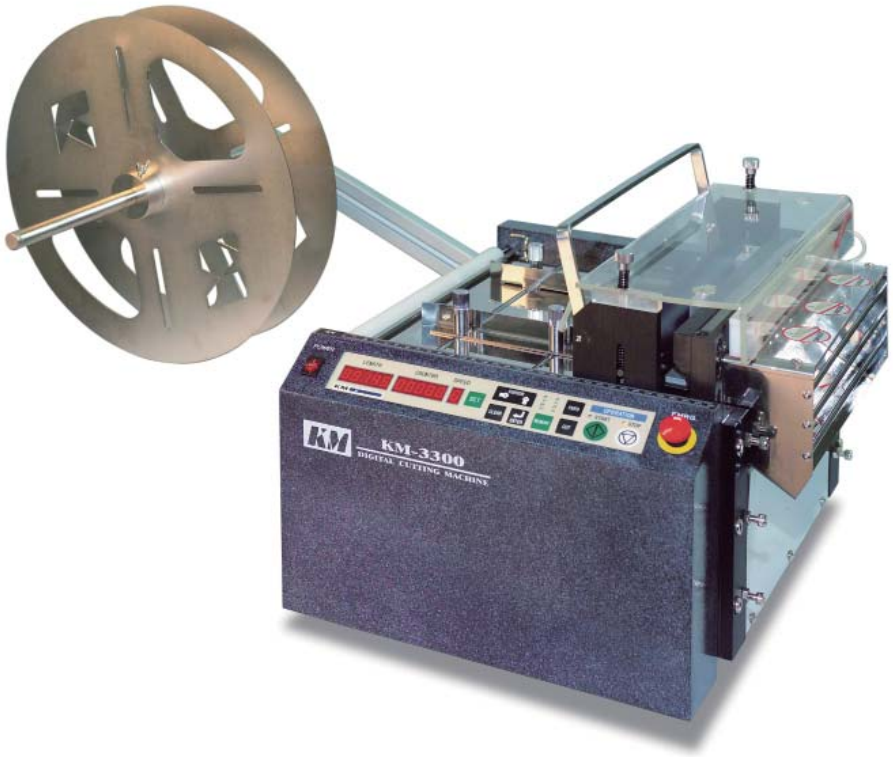

www.kmdigitech.com

Copyright © 2012 by.KMDIGITECH All cannot be copied without permissions) _ Edition 2012 _ EN

Digital Control Panel

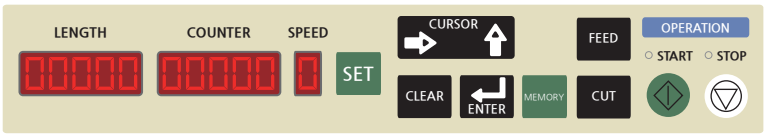

- Digital Window for easy set-up
- Push button set-up for all machine functions
- Count of pieces needed
- Five-memory storage
- Various warning messages and alarm functions

Precise, Convenient, Accurate!


Various sensors

- Material run-out sensor
- Default Value sensor for blade height
- Proximity sensor
- Power sensor to save working data in case of power failure




Feeding Part

- Material Hanger and Guide
- Aux. Roller and Feeding roller
- A knob for roller lift-up
- Roller friction adjusting nut
- Material pressing plate and adjusting nut



Cutting Part

- Upper/Lower/Wing blades
- Carbonated Blade life two times the life of competitor model
- Operate friendly design for easy replacement




Specifications

Dimension(mm)	410 X 500 X 345 (W x D x H)
Weight (KG)	43
Cutting Material	Shrink tube, Hose, Rubber, Tin/Copper plate, Wire, Braided wire, Paper, Silicon tube, Film, vinlyl, etc.
Max. cutting width	300mm
Power supply	110/220 VAC, 50/60Hz, Single Phase
Power consumption	18 W ~ 250 W


* Specifications are subject to change without notice.

Options




COP-312 Material Pre-feeder

• more than 100mm wide




COP-314 Static Remover

• Removes static remaining between blades and material



COP-313 Tube Spreading Unit

• Increases productivity by spreading the compressed vinyl tube to be cut.

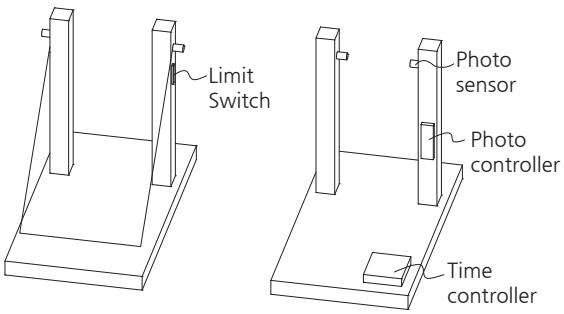

COP-315/316 Limit switch/ Photo sensor

• Cuts costs by connecting to the extruder machine and output materials

Cutting

940 Gosaek-dong, Gwonseon-gu,
Suwon-si, Kyeonggi-do, 441-813, Korea
Tel. 031-8012-9900 / Fax. 031-8012-9999

KM digitech

www.youtube.com/user/kmdigitech