MAVS-3201

A/V Selector Switcher

MDTC

Equipment Overview & Function

Description

○ This device provides the ability to route 32 analog audio/video input signals to a channel.

Features

○ Enable to control input/output by front control key. A rear panel RS-232C control port provides remote control function.

○ Memory back-up function helps to memorize the last status while it is turned off.

○ FND DISPLAY helps to view output status.

○ There is a synchronized terminal to adjust external broadcasting device and video sync.

Panel Drawing



Specifications

○ Audio Part

- Input/Output number : 32 x 1
- Input/Output type : Unbalanced stereo, 600ohm
- Input/Output connector : RCA
- Max level : 14dBm
- Frequency response : ±0.1dB(20Hz ~ 20kHz)
- Crosstalk : below 80dB
- S/N : below 70dB (20Hz ~ 20kHz)

MAX **Max Digital Tech Co.,Ltd**

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MAVS-3201

A/V Selector Switcher

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Specifications

○ Video Part


- Input/Output number : 32 x 1
- Input/Output type : Composite video 1Vp-p, 75ohm
- Input/Output connector : BNC
- Frequency response : ±0.1dB(750KHz ~ 4.7MHz)
- Differential phase error : 0.1°
- Differential gain error : 0.1%
- Crosstalk : below 60dB
- Sync : Standards, BNC, 75ohm

○ Remote Control Part

- Serial control : 1 RS-232/422, D-sub 9pin connector

○ Case & Power Part

- Power source : AC 85 ~ 240V 50 ~ 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : Below 50Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 89(H) * 300(D) mm

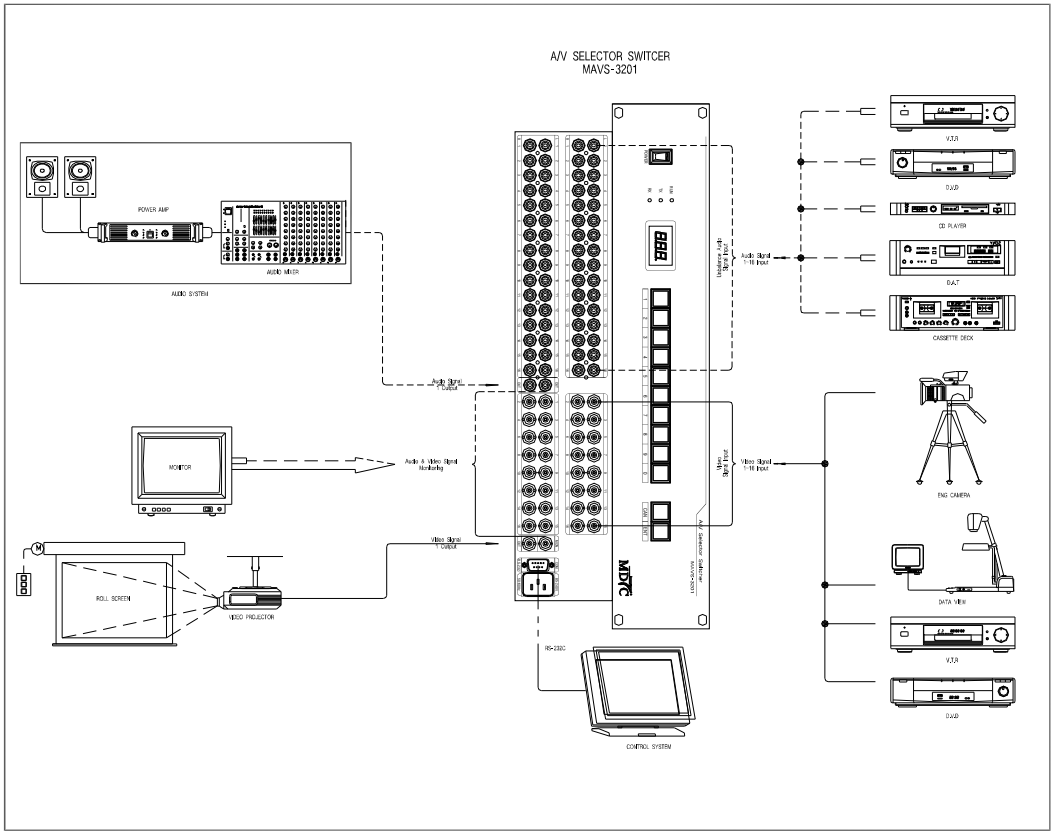

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217