Analog Controller

WTX-1300







Touch Pad Mouse Function

Key Point

- Touch Pad Mouse
- Controls up to 255 cameras.
- Multiple protocol supported in each channel
- Low energy consuming keyboard
- RS-485 / RS-422 communication
- Programmable user preferences.
  (Preset, Tour, Pattern, etc.)
- Built-in 3-Axis proportional joystick
- Easy upload of programmed data via serial communication.
- Built-in 2 lines character LCD
- User password support
- Programmable transmission speed for each ID
- Easy to be integrated with DVR
  (key-code value provided)

Dimensions

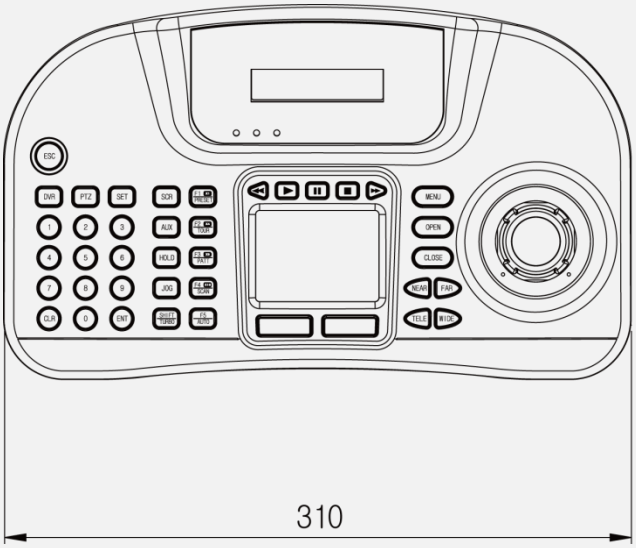

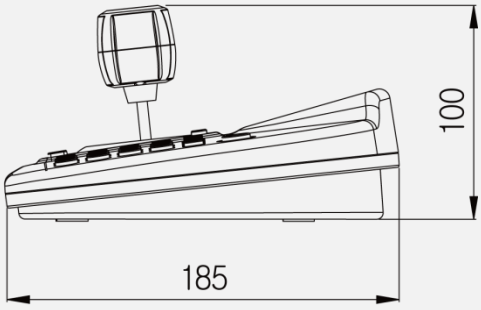

Specifications (WTX-1300)

Model	WTX-1300
Keyboard	Pan/Tilt/Zoom interface : RS-485/422
Communication	DVR interface : RS-485
	2400~57600 bps (selectable)
	Pan/Tilt control distance: 4000 ft (1.2km) on 24 AWG wire
	Protocol: Multiple (Including Pelco-D, total 9 protocol support)
COMM. Connector Type	Terminal Block(8p) , TX 3Port, TRX 1Port
Key Button	Rubber button
	Number (10), Function (23), DVR control (5)
Joystick	3Axis Pan/Tilt /Zoom control, movement speed control
Touch Pad Mouse	USB mouse driver , 65.00 x 49.00 mm (standard size)
	Mechanical Buttons : 2 on module
Power range	9.5 ~15V DC
Power consumtion	DC12V /150mA
Display	Character Type 16 character x 2 lines LCD
Operation Temperature	0℃ to 45℃
Humidity	10% -70% non-condensing
Dimension	310 x 185 x 100 mm