
WP-TYPE


FEATURES ;

- Accuracy guaranteed to 0.003mm TIR (0.0001").
- Excellent for CNC lathe and grinding machine and inspection machine.
- Center point and body are through-hardened to HRc 60±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Water proof type.



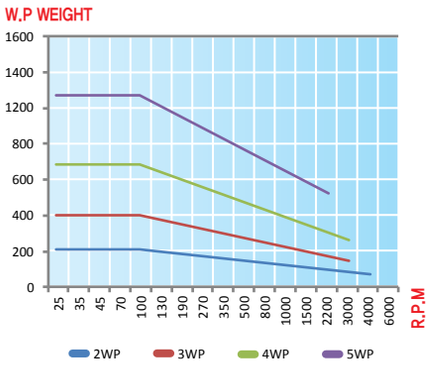

WP type technical data

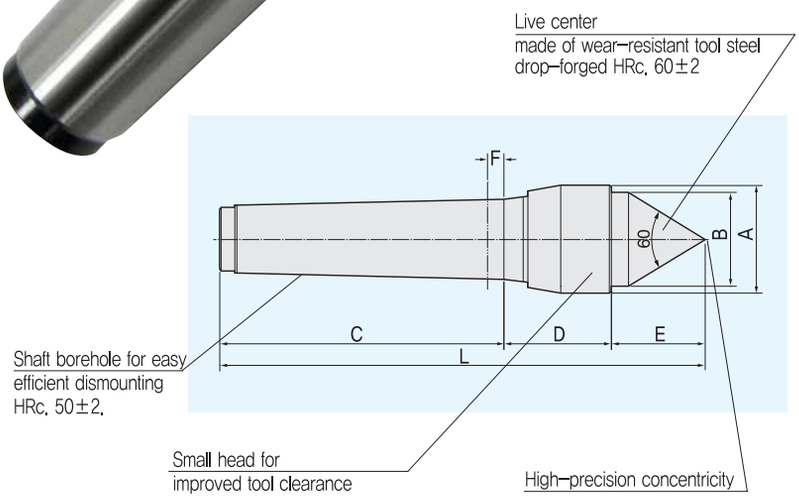

Dimension

07	1	0	0	MT

Unit : mm, kg


MODEL	MT	A	B	C	D	E	F	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
071002	2	27.7	23.8	69	28	23	4.5	120	200	4,000	0.3	0.003
071003	3	32.3	28	85	32	28	5	145	400	3,000	0.4	0.003
071004	4	45	40	108	48	38	6	194	700	3,000	1.1	0.003
071005	5	62	54	136	54	51	8	241	1300	2,000	2.7	0.003

WPC-TYPE

FEATURES ;

- Accuracy guaranteed to 0.003mm TIR (0.0001").
- Excellent for CNC lathe and grinding machine and inspection machine.
- Center point and body are through-hardened to HRc 90±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Water proof type.



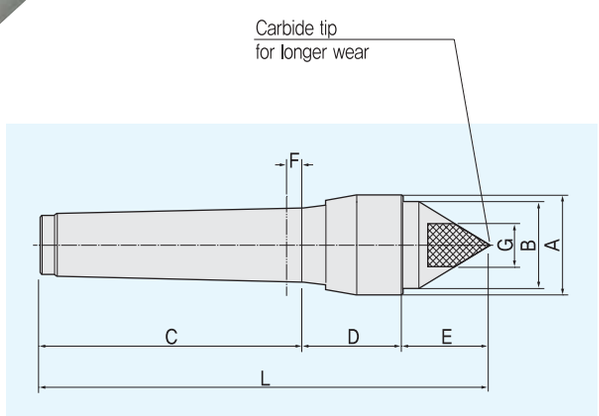

Dimension

07	2	0	0	MT

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
072002	2	27.7	23.8	69	28	23	4.5	10	120	200	4,000	0.3	0.003
072003	3	32.3	28	85	32	28	5	10	145	400	3,000	0.4	0.003
072004	4	45	40	108	48	38	6	14	194	700	3,000	1.1	0.003
072005	5	62	54	136	54	51	8	18	241	1,300	2,000	2.72	0.003


WPL30-TYPE

FEATURES ;


- Accuracy guaranteed to 0.003mm TIR (0.0001").
- Excellent for CNC lathe and grinding machine and inspection machine.
- Center point and body are through-hardened to HRc 60±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Water proof type.

Available

Carbide Tipped Points



WPL30C-TYPE

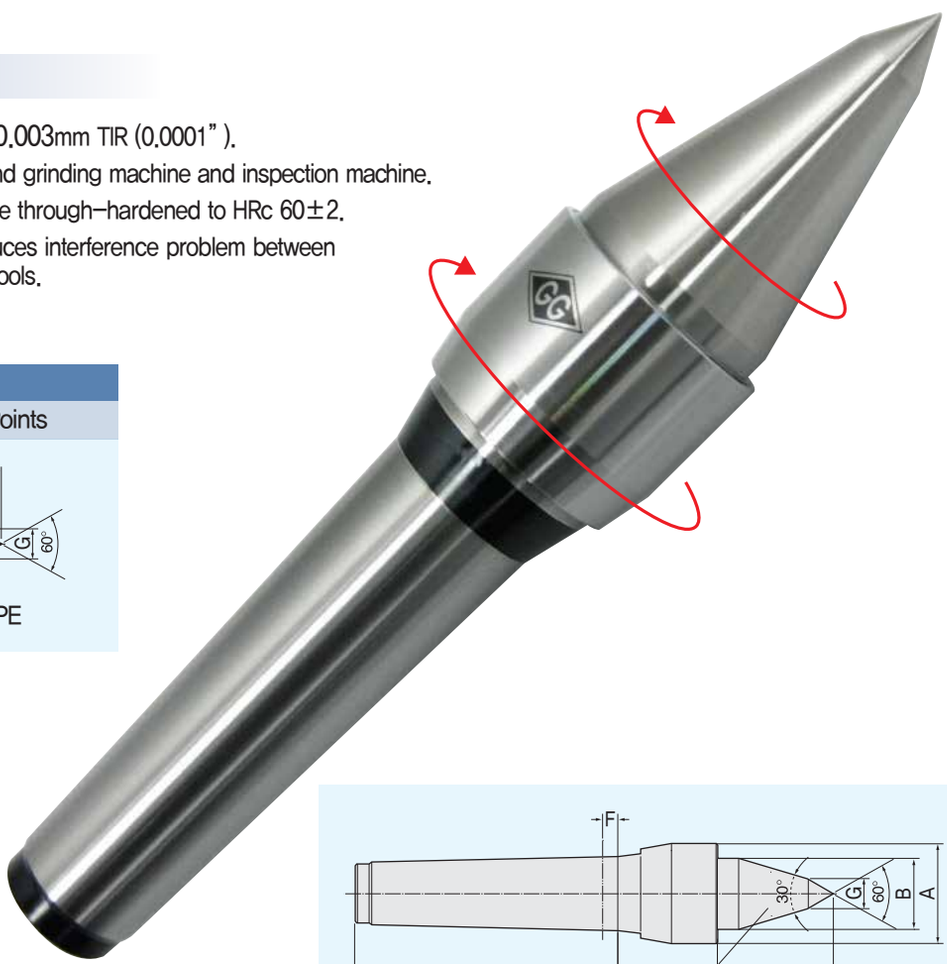

30° point is specially shaped for improved tool clearance

Dimension

07	3	0	0	MT

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
073002	2	27.7	23.8	69	28	35	4.5	10	132	120	4,000	0.3	0.003
073003	3	32.3	28	85	32	45	5	10	162	320	3,000	0.5	0.003
073004	4	45	40	108	48	65	6	14	221	560	3,000	1.2	0.003
073005	5	62	54	136	54	90	8	16	280	1,000	2,000	3.2	0.003


WPL30A-TYPE

FEATURES ;

- Accuracy guaranteed to 0.003mm TIR (0.0001").
- Excellent for CNC lathe and grinding machine and inspection machine.
- Center point and body are through-hardened to HRc 60±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Water proof type.


Available

Carbide Tipped Points



WPL30AC-TYPE



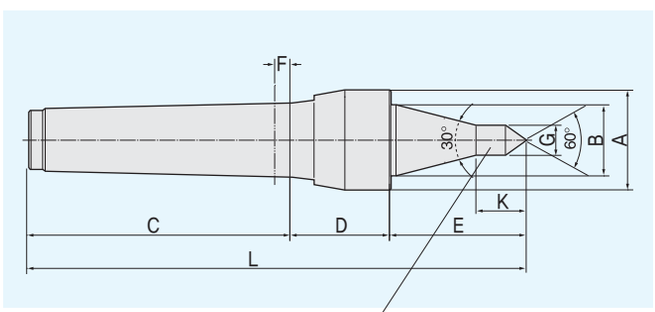

Elongated center point is specially shaped for improved tool clearance(Diagram)

Dimension

07	5	0	0	MT

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	K	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
075002	2	27.7	23.8	69	28	42	4.5	10	14	139	100	4,000	0.3	0.003
075003	3	32.3	28	85	32	50	5	10	14	167	280	3,000	0.5	0.003
075004	4	45	40	108	48	80	6	12.5	24	236	500	3,000	1.2	0.003
075005	5	62	54	136	54	110	8	12.5	24	300	900	2,000	3.2	0.003