BLDC DRIVER SBDSMI-03D

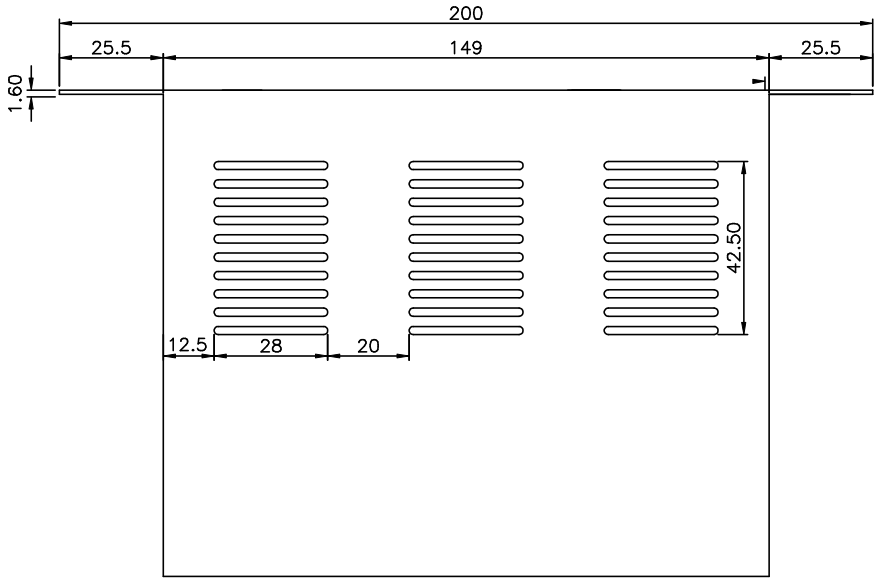

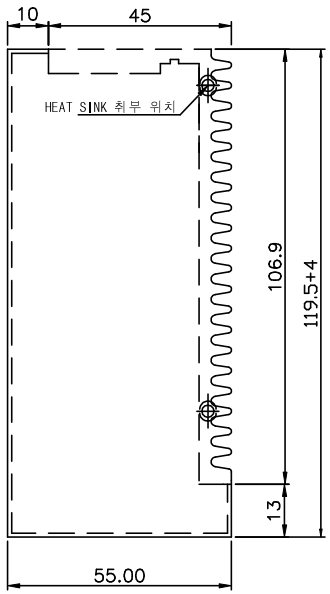

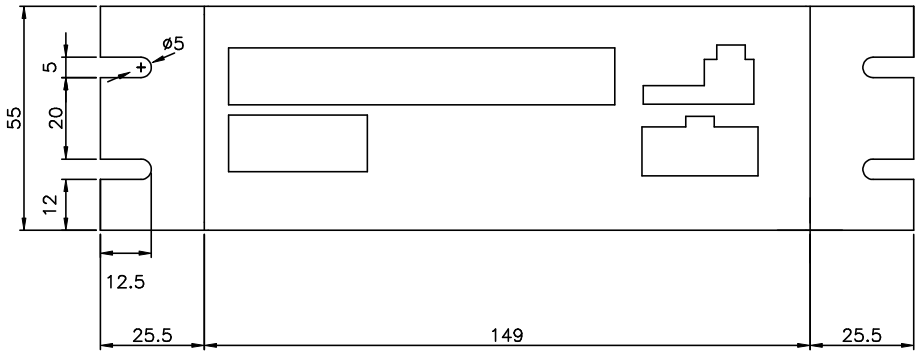

* SBDSMI-03D MODEL은 CASE 기본타입입니다.

Specifications	
Input Voltage	AC 100 ~ 220V ±15%
Maximum Allowable Current	3A
Frequency	50 / 60 Hz
Speed Control Range	300 ~ 3000 RPM
Insulation Resistance	Maximum volue of 100MΩ at DC 500V Mega Input columns
Environment	Ambient temperature 0°C ~ 50°C (Is not freezing)
Speed Setting	1. Internal / 2. External / 3. DC voltage Control (0 ~ 5V)
Input Signal	Photocoupler
Output Signal	Open Collector
Protection	Overload / Incorrect connection -> Motor Stop

Connector Specifications

1) User Interface

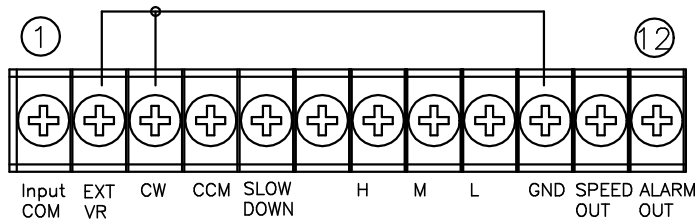

*역회전시 CCW 연결

2) POWER



AC 100 ~ 220V

3) MOTOR

CONNECTOR(5557-12)

1	2	3	4	5	6
7	8	9	10	11	12

NO	Remark
1	W
2	
3	
4	Hw
5	Hv
6	Hu
7	V
8	W
9	FG
10	
11	Vcc
12	GND