MAD-108

Audio Distributor Amp

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Description

○ Audio Distribution Amplifier takes one analog audio signal and then amplifies, spilt it to 8 audio analog signals.

Features

○ Its outstanding feature provides low frequency loss with minimum noise.

○ Audio gain generators enable to regulate the signal for leveling.

Panel Drawing

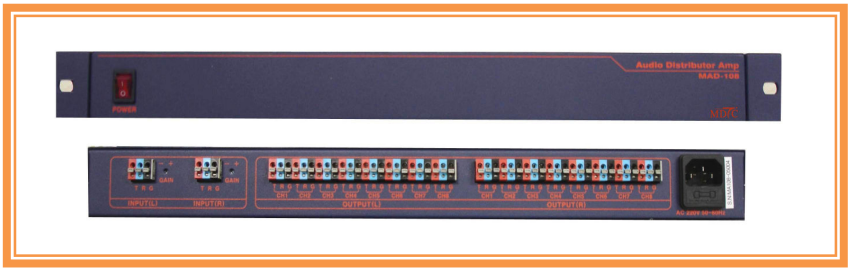

Specifications

○ Audio Part

- Input/Output number : 1 x 8
- Input/Output type : balanced stereo, 600ohm
- Input/Output connector : WAGO
- Max Level : 21dBm
- The gain : -11dB ~ +11dB
- Frequency response : ±0.1dB(20Hz ~ 20kHz)
- Crosstalk : below 80dB
- S/N : below 83dB (20Hz ~ 20kHz)

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MAD-108

Audio Distributor Amp

MDTC

Equipment Overview & Function

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Specifications

○ Case & Power Part

- Power source : AC 220V, 60Hz
- Temperature : 0℃ ~ 40℃
- Power consumption : below 10Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

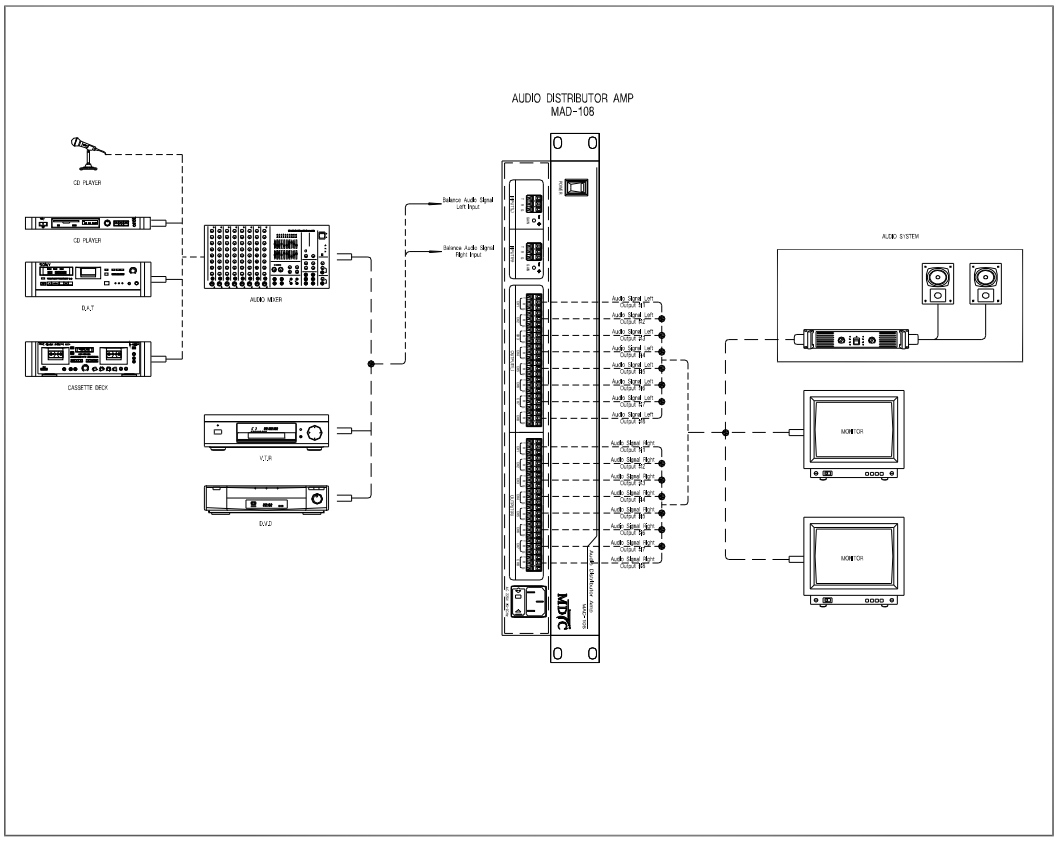

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217