ORION TECHNOLOGY

19RTLE

19" MARINE MONITOR



350 cd/m² High Brightness | 1000:1 High Contrast Ratio | 1280 X 1024 60Hz Resolution | 5ms Response Time | LED Back Light

MODEL #	19RTLE
DISPLAY	
Screen Size	19"
Max. Resolution	1280 x 1024 @60Hz
Pixel Pitch	0.294mm x 0.294mm
Brightness	350cd/m²(Typical)
Contrast Ratio	1000:1
Aspect Ratio	5 : 4
Viewing Angle (H/V)	160°/160°
Display Color	16.7 Million
Response Time	<5ms
Video System	Not Available
Frequency (H)	31 ~ 64Khz
Frequency (V)	56 ~ 75Hz
INTERFACE	
RGB In(15Pin D-Sub)	1
DVI-In	1
SPECIAL FEATURES	
Multi Display Function	Not Available
Filter Type	Not Available
LCD Protection Glass	Optional
Trigger Sensor / Image Rotation	Not Available / Not Available
Video Resolution(Max)	Not Available
Camera Mounting Hole	Not Available
Multi-lingual Language	English, Spanish, French, Korean, Dutch, Deutsch
DIMENSIONS	
Outline Dimension (W x H x D)	19.09" x 15.74" x 4.07" (485mm x 400mm x 103.5mm)
Net Weight	TBD
GENERAL	
Transmitter - IR Remote Control	YES
Power - Electrical Ratings - Consumption	AC100 ~ 240V[50/60Hz] 22W
Warranty -Parts/Labor	2 Year / 2 Year
Operating Temperature	32 - 158°F / 0 - 70°C
Vibration endurance	7m/s²

19RTLE ADVANTAGES:

- World Leading Active Matrix TFT-LCD Panel
- Noise Reduction
- Reliable Front - Waterproof and Tempered glass
- Easy to control - Brightness and Monitor setting, Power ON/OFF

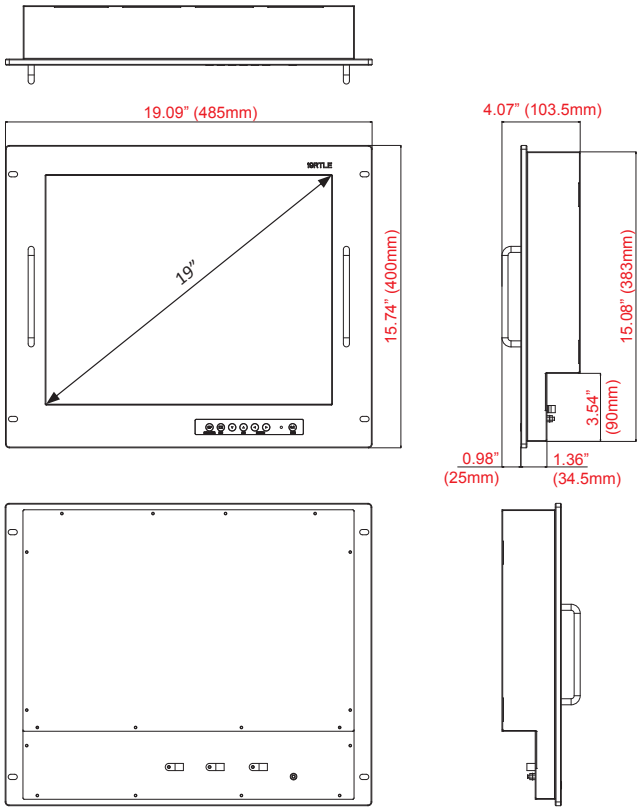

INTERFACE

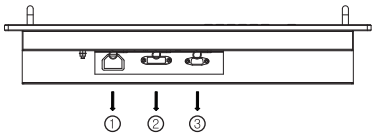

1. AC POWER IN
2. DVI IN
3. VGA IN

Contact Point

- http://www.oriontechnology.co.kr
- 1242 Apo industrial zone, In-ri, Apo-up, Gimchun-shi, Kyungbuk, Korea
- E-mail: marine@oriontechnology.co.kr
- TEL: +82-54-434-9574 / FAX: +82-50-4982-9574