MVD-1620

Video Distributor Amp

장비개요 및 성능

Description

○ 본 장비는 1개의 Analog Video 신호를 입력 받아 신호의 저하 없이 6개의 Analog Video 출력으로 증폭 분배 시켜주는 Card가 20 Channel 실장 가능한 장비이다.

Features

○ 방송급 화질의 고 대역 주파수 특성을 가지고 있으며, 신호의 왜율, LOW LOSS가 없는 우수한 특성의 분배 기능을 가지고 있다.

○ Card Type 방송용 Video 전용 분배 증폭기로서 Power는 Dual Power로 설계되어 있으며, 입력된 Video신호의 유 • 무를 시작적으로 확인(LED)이 가능하다.

○ Main Shelf에 10 Card를 실장 할 수 있으며, 1 Card당 1 입력에 6 분배 출력하여, Card별로 Video Gain 조절, 단자 부착으로 Video Level 신호조정이 가능하다.

Panel Drawing



Specifications

○ Video Part

- Input/Output number : 1in x 6 x 20ch
- Input/Output type : composite video 1Vp-p, 75ohm
- Input/Output connector : BNC
- The gain : 45IRE ~ 185IRE
- Frequency response : ±0.1dB(750KHz ~ 4.7MHz)
- Crosstalk : below 60dB
- S/N : below 65dB

Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved

Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MVD-1620

Video Distributor Amp


장비개요 및 성능

Max Digital Tech Co., Ltd http://www.maxdigital.co.kr

Specifications

○ Case & Power Part

- Power source : AC 85 ~ 240V, 50 ~ 60Hz Dual Power Supply
- Temperature : 0℃ ~ 40℃
- Power consumption : below 30Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 178(H) * 300(D) mm

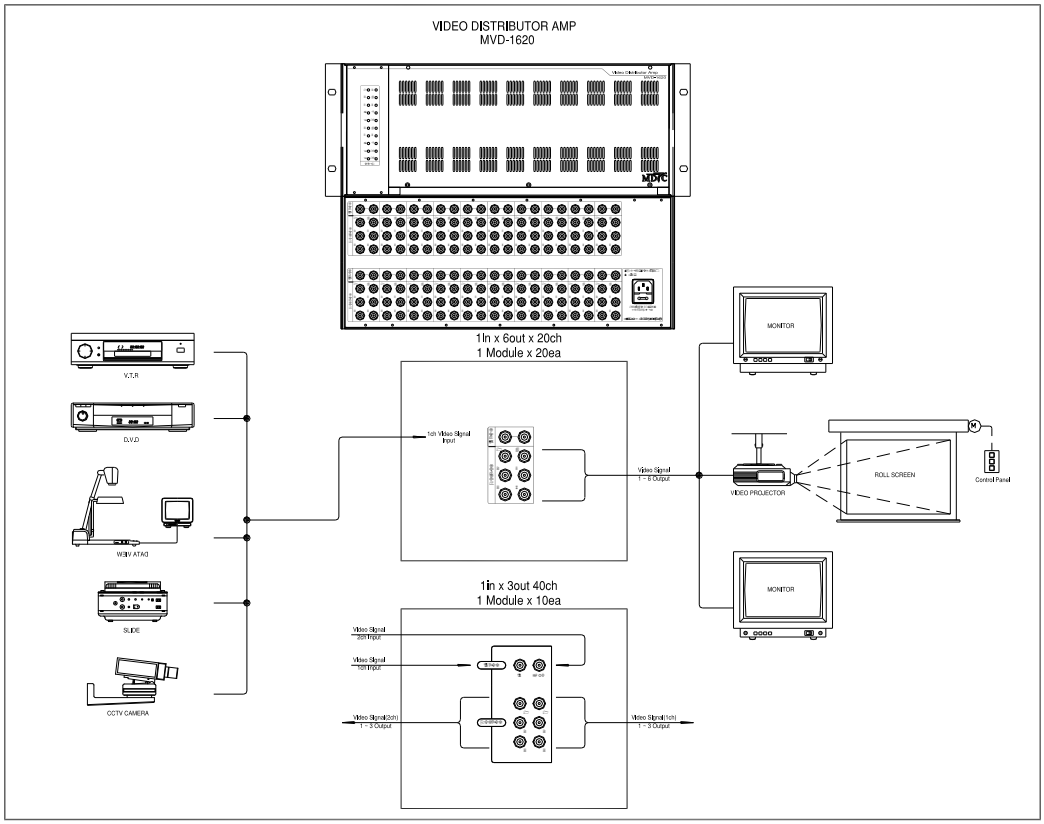

Max Digital Tech Co.,Ltd
Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217