Rapport Mini

Professional CCTV Tester Rapport



FEATURES

- CCTV field monitor
- Multimeter
- PTZ controller
- PTZ protocal analyzer

SPECIFICATIONS

MODEL	Rapport Mini		
Electronic Characteristics	Input Voltage	12V ±10%, above 1A	
	Battery	7.4V (3.7x2)Li-Poly, 2000mAh	
	Built-in Charger	Charging time	More than 6 hrs
		Operating time	More than 6 hrs(Max.8hrs)
Image	Signal System	NTSC / PAL	
	Video In/ Out	1CH BNC , 1.0-Vpp	
PTZ Operation Test	Protocol	Multiple	
	Transmission Speed	2400 ~ 38400kbps	
	Transmission Mode	RS-422 / RS-485	
Multimeter	AC Voltage	4V/ 40V/300V	
	DC Voltage	400mV/4V/40V/300V	
	Resistance	400Ω/ 4KΩ /40KΩ /400K	
	Conitinuity	Built-in Buzzer sound	
Dimensions		79.1(W) x 159.3(H) x 32.2(D) mm	

DIMENSIONS

Unit : mm

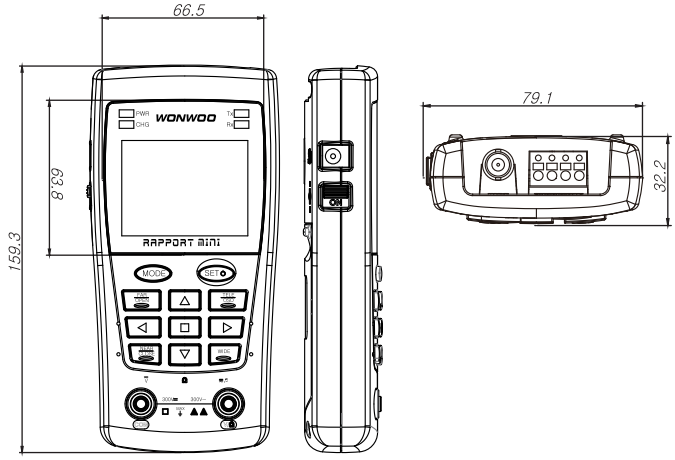

CCTV Field Monitor



The Rapport Mini features color CCTV field monitor.

It built-in 2.5 inch color Digital Type TFT-LCD monitor, supports both PAL & NTSC video signal format. Display video signal level (IRE) is helpful to check the video quality. Brightness & Contrast control.

PTZ Controller



The Rapport Mini features full function of CCTV PTZ Controller.

It controls & programs variety of Speed & Slow Dome cameras. This will allow CCTV installer to test or program PTZ cameras at the actual camera job site. It has multi protocol and programmable baud rate.

Multimeter



Rapport Mini features Digital multimeter.

It combines the most basic instrument include a voltmeter, ohmmeter and continuity tester.

PTZ Protocol Analyzer



The Rapport Mini features PTZ Protocol Analyzer.

It determines which protocol to control you PTZ cameras from PTZ Controller or DVR. This will guide CCTV installer to understand the protocol and find the fault device easily.