PRODUCT REVIEW SHEET

Compact V/F bullet camera

Design



Specifications

Model		SJC10B64NAF	SJC10B64PAF
TV System		NTSC	PAL
Image Sensor		1/3" Sony Super HAD II Color CCD	
Number of Pixel	H	976	976
	V	494	582
Scanning Frequency	H	15.734kHz	15.625kHz
	V	59.94Hz	50Hz
Resolution		700 TV Lines	
Scanning System		2:1 Interlace	
Sync System		Internal	
Video Output		VBS 1.0V p-p 75Ω	
S/N Ratio		More than 52dB	
Minimum illumination		0.001 Lux (Sense up on)	
Electronic Shutter		1/60~1/100,000	1/50~1/100,000
Power Source		DC12V ±10%	
Power Consumption		Max 1.5 Watt	
Operating Temperature		-10℃ to 50℃	
Operating Humidity		30% to 90%	
Lens		3.5 ~16mm varifocal waterproof lens	
Dimension/mm		⌀30 X 120(L)	
Weight/g		360	

Specification & Design are subject to change without prior notice

Key Features

1/3" 520K Sony Super HAD II Color CCD
3.5~16mm varifocal waterproof lens
Smart 3D-DNR
Sense up (up to x 256)
Digital WDR Wide Dynamic Range)
F-DNR (Fog Digital Noise Reduction)
Digital zoom (up to x32)
Auto Day & Night function
Lens adjustable externally
Conceal bracket (3 axis for wall & ceiling mount)
DC12V

Dimensions

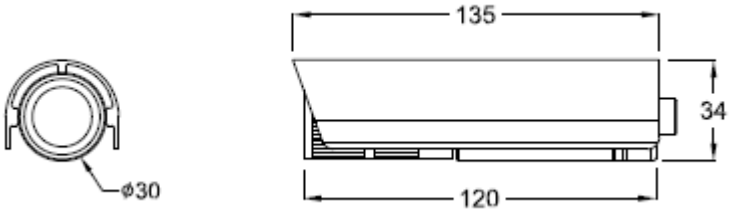

SJ MICROTECH Co., Ltd.

Copyrights© SJ Microtech Co.,Ltd. All rights reserved